SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class matter. Copyrighted, 1892, by Munn & Co.

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LXVI.—No. 15. ESTABLISHED 1845. NEW YORK, APRIL 9, 1892. $3.00 A YEAR. WEEKLY.

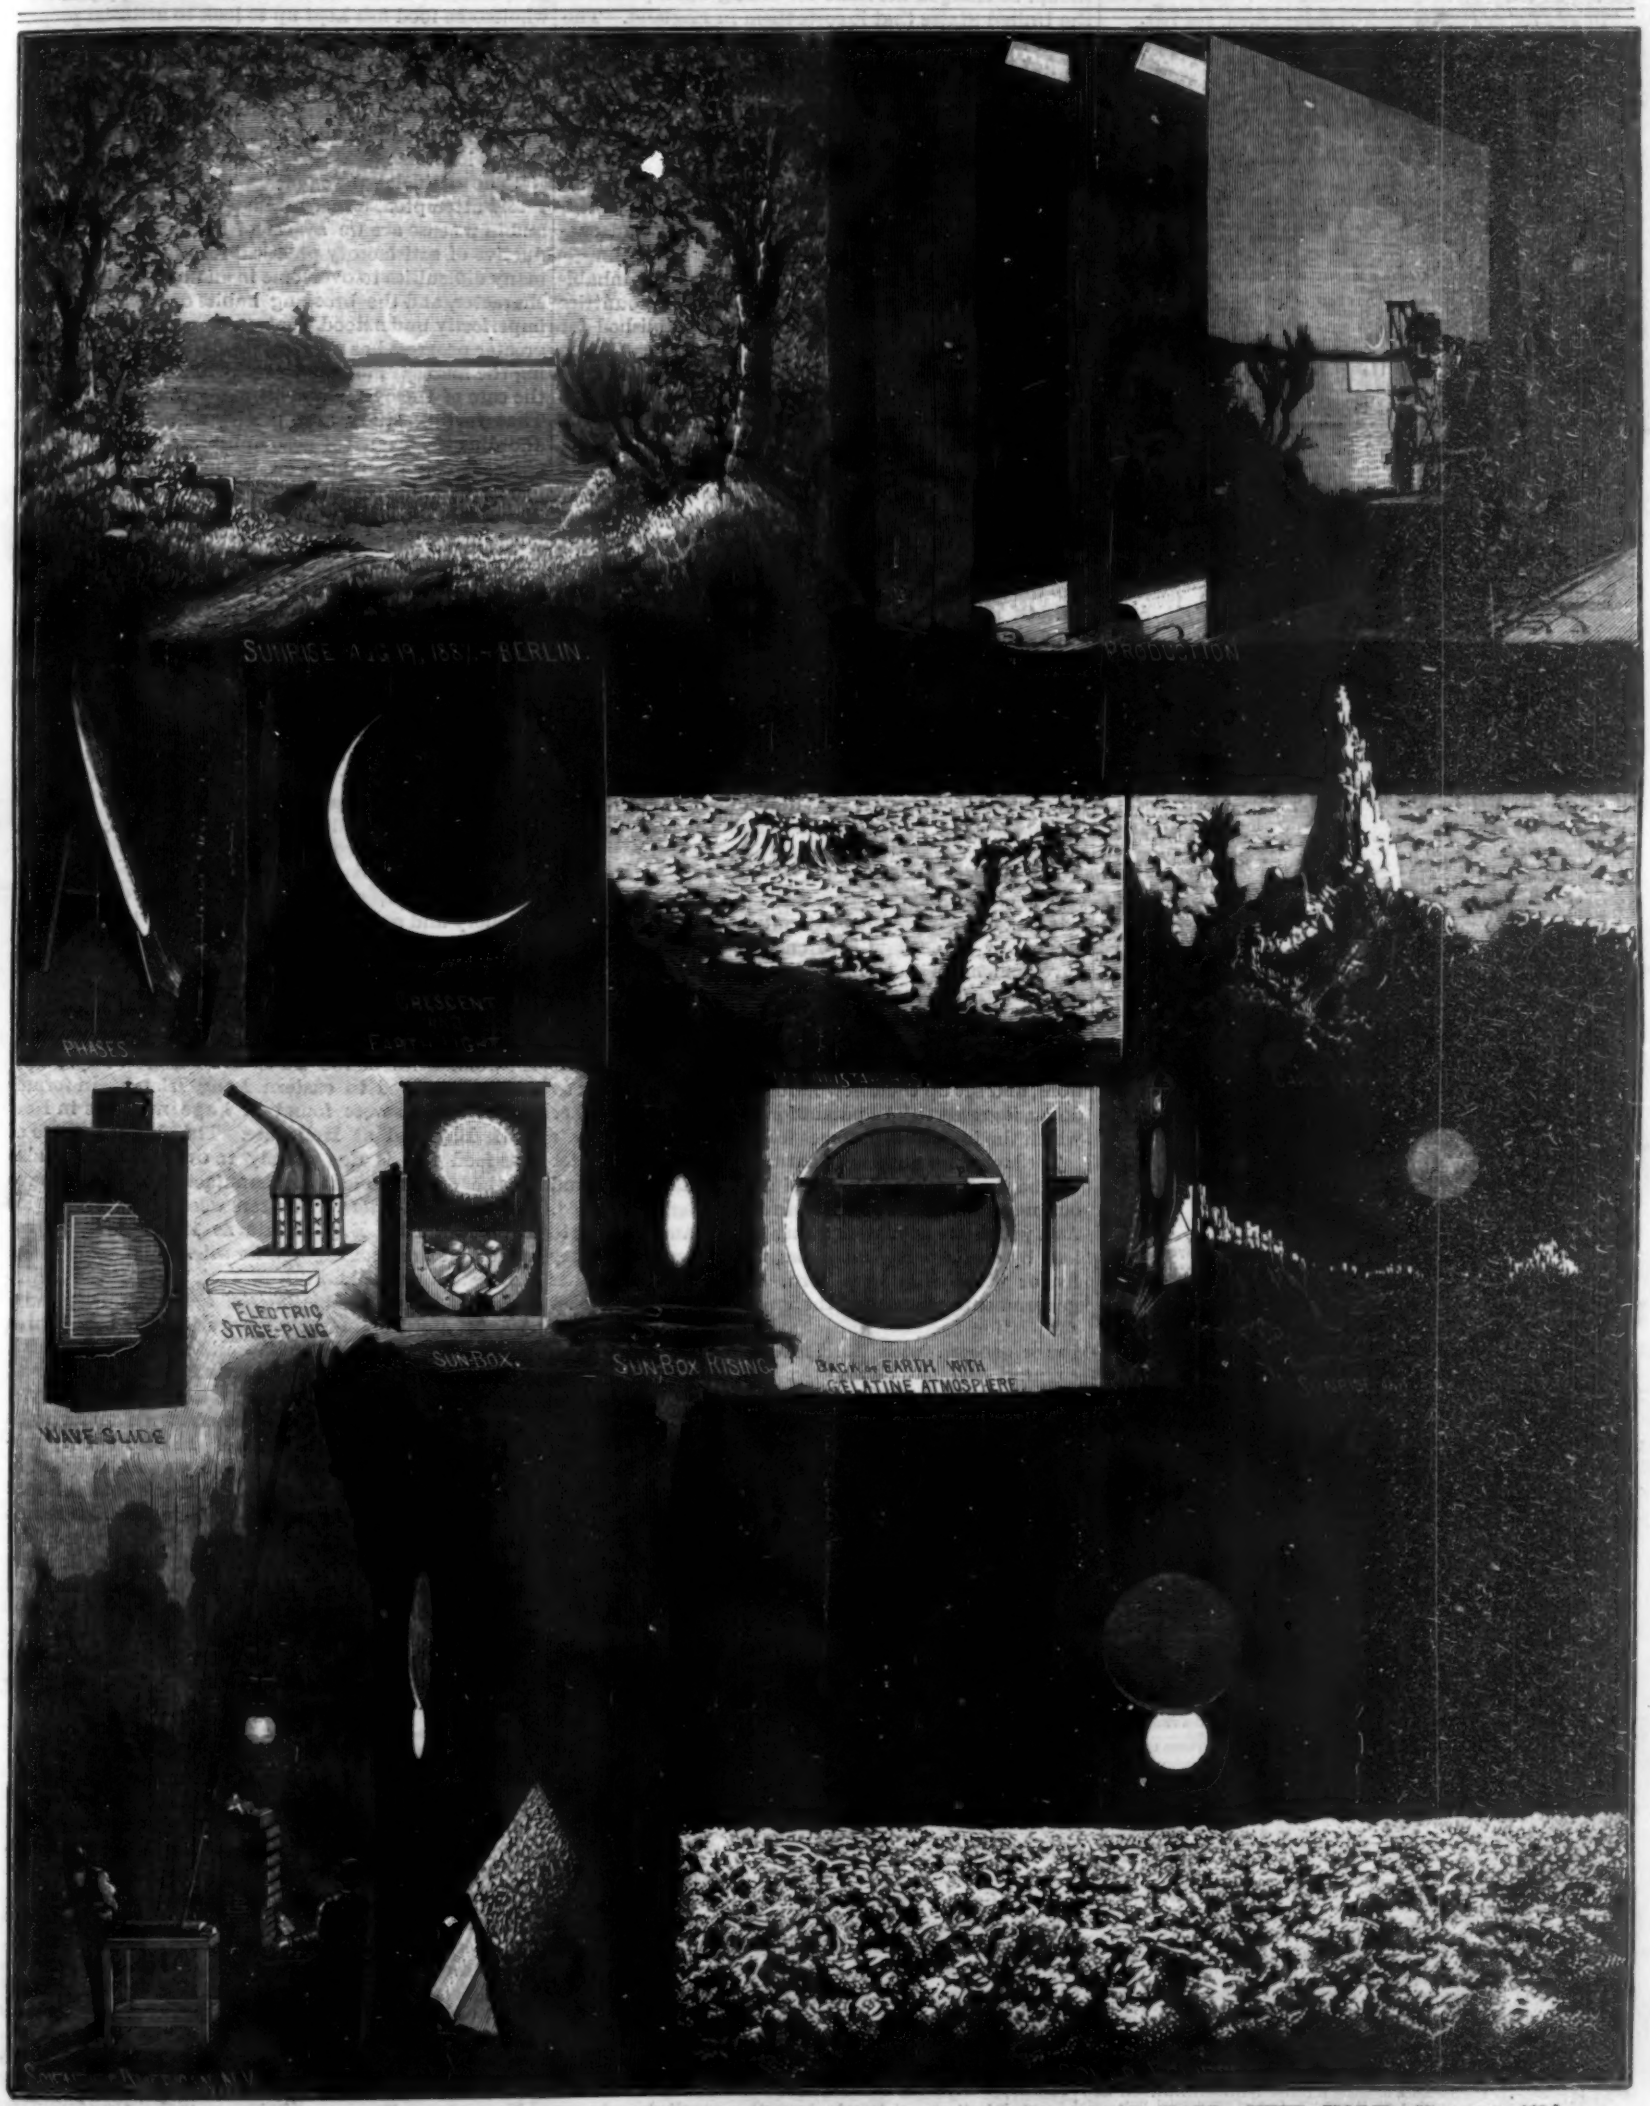

APPARATUS USED FOR ILLUSTRATING "A TRIP TO THE MOON," CARNEGIE MUSIC HALL, NEW YORK.—[See page 220.]

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, for the U. S., Canada or Mexico.....$3 00
One copy, six months, for the U. S., Canada or Mexico..... 1 50
One copy, one year, to any foreign country belonging to Postal Union. 4 00
Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, $5.00 a year, for the U. S., Canada or Mexico. $6.00 a year to foreign countries belonging to the Postal Union. Single copies, 10 cents. Sold by all newsdealers throughout the country. See prospectus, last page.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, to any address in U. S., Canada or Mexico, on receipt of seven dollars. To foreign countries within Postal Union, nine dollars a year.

Building Edition.

THE ARCHITECTS AND BUILDERS EDITION OF THE SCIENTIFIC AMERICAN is a large and splendid illustrated periodical, issued monthly, containing floor plans, perspective views, and sheets of constructive details, pertaining to modern architecture. Each number is illustrated with beautiful plates, showing desirable dwellings, public buildings and architectural work in great variety. To builders and all who contemplate building this work is invaluable. Has the largest circulation of any architectural publication in the world.

Single copies 25 cents. By mail, to any part of the United States, Canada or Mexico, $2.50 a year. To foreign Postal Union countries, $3.00 a year. Combined rate for BUILDING EDITION with SCIENTIFIC AMERICAN, $5.00 a year; combined rate for BUILDING EDITION, SCIENTIFIC AMERICAN and SUPPLEMENT, $6.00 a year. To foreign countries, $11.30 a year.

Spanish Edition of the Scientific American.

LA AMERICA CIENTIFICA E INDUSTRIAL (Spanish trade edition of the SCIENTIFIC AMERICAN) is published monthly, uniform in size and typography with the SCIENTIFIC AMERICAN. Every number of *La America* is profusely illustrated. It is the finest scientific, industrial trade paper printed in the Spanish language. It circulates throughout Cuba, the West Indies, Mexico Central and South America, Spain and Spanish possessions—wherever the Spanish language is spoken. $3.00 a year, post paid to any part of the world. Single copies 25 cents. See prospectus.

MUNN & CO., Publishers,
361 Broadway, New York.

☞ The safest way to remit is by postal order, express money order, draft or bank check. Make all remittances payable to order of MUNN & CO.

☞ Readers are specially requested to notify the publishers in case of any failure, delay, or irregularity in receipt of papers.

NEW YORK, SATURDAY, APRIL 9, 1892.

Contents.

(Illustrated articles are marked with an asterisk.)

Agricultural inventions, recent. 224
Air, compressed, in Chicago.* 225
Aluminum as a coin. 229
Astronomical lecture, illustrated 226
Bicycle, the Lovell diamond safety.* 225
Capillarity, experiment in*. 226
Cave dwellers, ancient, in Asia. 229
Caviar. 229
Cement floors. 229
Corundum wheels, to clean. 223
Drainage of a small lake. 225
Flowers, artificial coloration of. 223
Fruits and nuts, tropic and semitropic. 228
Glacier, Muir, Alaska's 227
Glass manufacture in Belgium. 225
Hydrostatic paradox, a*. 230
Inandi, the calculator*. 230
Inventions, recently patented. 234
Inventors, a word to. 226
Inventors, foreign, discrimination against. 224
Irrigation, the Las Vegas convention. 225
Lacquer, a tar asphalt, for iron. 229
Lobsters, artificial propagation of. 224
Manufactures, the future of. 225
Mathematical expert, a wonderful*. 230
Mirage, detecting a. 229
Moon, a trip to the*. 227
Notes and queries. 234
Oil burner, the Shipman Co.'s*. 226
Old people, occupation for. 226
Paper barrels, how made. 228
Patents granted, weekly record. 235
Peccaries, Texas, extermination of. 225
Poisoning, chronic arsenical. 225
Rifle sight, Parker's*. 226
Rope traction for cable roads*. 231
Rust, railway. 226
Watson, Sereno. 226
Wheel, a great rope traction*. 231

TABLE OF CONTENTS OF SCIENTIFIC AMERICAN SUPPLEMENT No. 849.

For the Week Ending April 9, 1892.

Price 10 cents. For sale by all newsdealers.

PAGE

I. ARCHÆOLOGY.—Constantinople Art Treasures.—By Prof. ALBERT L. LONG.—Valuable relics of ancient art as displayed under the auspices of the present Sultan of Turkey. 13565

II. BIOGRAPHY.—The Father of Modern Physics.—Portrait and biographical note of Galileo.—1 illustration. 13570

III. BIOLOGY.—Removal of Gold by Fungoid Growths.—A curious reaction between fungoid growths and solutions of gold. 13565

IV. CHEMISTRY.—A Rapid Method of Determining the Composition of Lubricating Oils.—By HAROLD GRIPPER.—Application of saponification to oil analysis, with full table. 13573

Boron.—The amorphous form of this element as investigated by M. Moissan. 13573

Fat Extraction Apparatus.—By ALFRED SMETHAM.—A fat extraction apparatus utilizing upward percolation.—1 illustration. 13573

Fermentation.—A recent lecture by Prof. ARMSTRONG on the phenomena of fermentation.—A very valuable abstract of his conclusions. 13572

Iron Rust.—The presence of magnetic oxide of iron in iron rust. 13574

Podetic Motion in Relation to Colloidal Solutions.—By WILLIAM RAMSAY.—Osmotic pressure and podetic motion, and the effect upon them of an electrolyte. 13574

Valuation of Aluminum and its Alloys.—By Herr F. REICHENBERGER.—Commercial analysis of aluminum alloys and determination of their prominent constituents. 13572

V. ELECTRICITY.—An Interesting Electrolytic Phenomenon.—The production of light in electrolysis. 13569

Generating Stations and their Physical Hazards.—By GEO. P. LOW.—The relations between electrical engineers and the underwriters.—A practical paper on the proper erection and conducting of a station and distribution plants. 13568

The Hopfner Electrolytic Direct Process of Copper and Silver Reduction.—A direct reduction of copper and silver from their ores by the use of chlorides. 13569

VI. GEOGRAPHY.—Korea.—Interesting extracts from a recent paper on a journey to Northern Korea. 13569

VII. MEDICINE AND HYGIENE.—Italian Experience with the Pasteur Method for Hydrophobia.—Success attending the Pasteur inoculations in Milan. 13570

The Management and Care of Patients with Hemiplegia Resulting from Cerebral Hemorrhage.—By WILLIAM M. LEEDS, M.D.—One-sided paralysis, with diagnosis and treatment. 13571

VIII. METALLURGY.—Different Methods of Tinning.—Three typical methods of tinning described. 13569

IX. MINING ENGINEERING.—The Temescal Tin Mines.—By ENOCH KNIGHT.—American tin mines in Southern California.—An operative American tin mine. 13564

X. MISCELLANEOUS.—A Singular Clock.—A clock which works by rolling down an inclined plane.—2 illustrations. 13563

XI. PHOTOGRAPHY.—A New Telescopic Photographic Lens.—A recent achievement of Dallmeyer.—Wonderful results obtained in photographing distant objects.—Reproductions of the work.—5 illustrations. 13560

XII. NAVAL ENGINEERING.—Life Saving Devices.—Some more products of the London *Graphic* competition.—Various methods of saving life from wrecked vessels.—7 illustrations. 13560

H. M. S. Blenheim, the New First Class Protected Cruiser, on Her Trial Trip.—A beautiful illustration of the sister ship of the Blake.—1 illustration. 13559

The Cruiser Troude.—A new fast cruiser recently completed at Brest.—1 illustration. 13560

XIII. PHOTOGRAPHY.—Photo-Enamels.—How the photographic details of the process should be conducted.—Valuable practical hints. 13564

XIV. TECHNOLOGY.—Glazing or Lustering Bodies.—Production of finishing compositions for cloth. 13563

Resins, Waxes, and Solid Paraffins.—By Prof. A. H. CHURCH.—Valuable resume of the commercial products falling under these classes. 13561

Tweeding.—Exact details of how woolen yarn goods should be tweeded.—The importance of doing it correctly. 13564

The Cheap Production of Hydrogen Gas.—Commercial production of hydrogen gas from iron and water. 13562

PROPOSED DISCRIMINATION AGAINST FOREIGN INVENTORS.

A dispatch from Washington says, at the request of the House Committee on Patents, General Berdan has prepared and submitted to the committee a bill to equalize the cost of patents to inventors in the United States and in foreign countries. In an argument before the committee General Berdan said that in England a patent costs about $800, and runs fourteen years, while in this country a patent can be had for $35, and runs for seventeen years. General Berdan said that many English inventors took out patents in this country, as well as at home, and he asserted that they should be charged the same for taking out a patent in the United States that it costs them in England. The bill, it is said, was favorably received by the committee.

The idea of compelling Englishmen to pay more for patents in this country than our own citizens, because the British fees for patents are larger than ours, is very old. Under the law of 1836 and up to the year 1861, the subjects of Great Britain were required to pay $500 on filing an application for an American patent, and all other foreigners $300. If the application was rejected, two-thirds of the sum paid was refunded and one-third retained by our government.

In 1861 this law discriminating between the inhabitants of the United States and those of other countries was repealed, and the same fees were established for all applicants, namely, $15 on filing the application for patent and $20 payable in the event of an allowance of the patent. If no patent is allowed, the applicant loses the first fee of $15, which is supposed to cover the cost of the official examination.

Prior to the year 1861, the number of patents granted to Englishmen was quite small, varying from twelve to twenty patents in a year. Dating from the reduction of fees in 1861 to the present time, the yearly number of patents to Englishmen has gradually increased. In 1880 the number issued to them was 275; in 1890, it was 721. Of all foreigners, the English take the largest number. Germany comes next, with 452 granted in 1890; Canada, 371; France, 178; Austria, 71; Switzerland, 56; Sweden, 32; very few to other countries.

The total number of American patents issued in 1891 was 23,344. It will thus be seen that the ratio between patents granted to Englishmen and other foreigners, as compared with the total number of issued patents, is very small. Whether it is desirable to return to the old, abandoned system of discriminating against foreigners is very questionable.

The theory upon which we grant patents, and the object of our patent laws, is the promotion of useful arts and industries, not the taxation of inventors. The aim of our patent law is to encourage the study and development of new inventions whereby multiplied and diversified forms of novel industries are made accessible to the people; for by industry they thrive. The American law, as it stands, invites inventors throughout the world to bring hither their new inventions, and set up their new industries; in reward for so doing, it grants them a patent for seventeen years, after which the invention becomes free to the public.

The larger the number of patents granted, the greater will be the number of new industries established, and our measure of prosperity correspondingly increased. As a people we have everything to gain and nothing to lose by encouraging inventors, no matter where they live or where they were born. The price that other governments charge for their patents may be proper subject for diplomatic negotiation; but it has no bearing or concern with the industrial laws of our own country.

The proposed bill we regard as unnecessary and uncalled for. It is unwise. It is legislation for the repression of industry and inventive genius. Nations that are so short-sighted as to adopt such measures undoubtedly subject themselves to industrial losses. They are not examples for the United States to follow.

ARTIFICIAL PROPAGATION OF LOBSTERS.

During the past ten years there has been a great falling off in the supply of lobsters, until the price has increased fully one hundred per cent. This applies alike to the New York market, to the waters along the New England coast and in Canada and Newfoundland, where lobster fishing and canning is an important industry. The necessity for increasing the supply of lobsters is generally recognized, and two methods are proposed for accomplishing this object. One is the enactment of laws which will check the depletion of the lobster beds by over fishing and the other is artificial propagation.

Marshall McDonald, who is at the head of the United States Fish Commission, says: "I have always felt that the maintenance of the lobster fishery rested more essentially upon proper regulation of the matter by the States than upon any efforts in the way of artificial propagation. The most usual regulation is that prohibiting the sale of lobsters below certain dimensions; the minimum limit, though varying with the different States, being smallest in Massachusetts. In Maine, where the law is enforced and the minimum fixed, I believe, at ten inches, the result has been a marked improvement in the lobster fisheries during recent years."

A law was enacted by the New York Legislature in 1890, prohibiting the taking of lobsters smaller than ten and a half inches, but it was repealed, largely, it is said, by reason of the efforts of a hotel keeper in New York City with political influence, who was determined to serve small lobsters on his table, regardless of the effect of rescinding the regulations.

The difficulty of securing legislation on this subject of enforcing the laws when they are enacted, and preventing their repeal through the efforts of persons who have no regard whatever for the consequences of their acts, compels those who desire to see the supply of this wholesome food fish kept up to look to artificial propagation as the most available method for securing the object desired.

In the volume entitled "The Fishery Industries of the United States," by G. Browne Goode and associates, the following statement is made regarding the cultivation of lobsters:

"The artificial propagation of lobsters has been rarely attempted, either in this country or in Europe, and in no case are we aware of its having been productive of satisfactory practical results. There are so many difficulties to overcome in an undertaking of this character, and the breeding habits of lobsters are so imperfectly understood, that it is not surprising that greater progress has not been made in materially aiding the increase in supplies by artificial culture, as in the case of the oyster and of many of our true fishes. That further study and persistent efforts may yet afford us the means of accomplishing so desirable an object is very probable, and is sincerely to be hoped for, in view of the apparent great decrease in the abundance of lobsters on many portions of our Atlantic coast."

Since the above opinion was expressed considerable success has been achieved in the line of artificial propagation. The United States Fish Commission's hatchery at Wood's Holl, Mass., provides about three million young lobsters each year, and these are all placed in Vineyard Sound and Buzzard's Bay, owing to the impoverishment of the species in that vicinity.

For three seasons lobsters have been hatched in small numbers at the station of the New York Commission, Cold Spring Harbor, L. I. Last season 27,700 were placed in the water at that point. The embryos are very delicate, and when lobsters are placed on ice, as many are which come to market, the embryo is generally ruined for hatching purposes.

Fred. Mather, superintendent of the Cold Spring hatchery and a man of wide experience in fish propagation, said recently that lobsters were not only decreasing in numbers, but also in size. A two pound lobster was now considered a fair average.

New York is next to the largest receiving market for lobsters in the country, yet the lobster fisheries within the boundaries of the State are not now important, and are confined to eastern Long Island. In former years lobsters were found in large numbers in New York Bay and at Hell Gate. The disappearance of this food fish is due mainly to over fishing, but also to the establishment of manufactories, which have polluted the waters. Lobsters were taken at Robins Reef, New York Bay, as late as 1879, but they were small and were not exposed for sale.

Lobsters are sold in New York during the entire year, but the demand is five times greater during July, August, and September than during any other three months of the year. The demand is the least during February and March. The consumption of lobsters at Coney Island in summer reaches 3,500 pounds a day.

The experience on the coast of Maine seems to be similar to that already stated. In 1890 twenty million of lobsters were taken, which was a falling off of five million or twenty per cent from the catch of 1888 and ten per cent from 1889. There has also been a steady decrease in the size of the fish sent to market. During 1889 and 1890 the average length of lobsters offered for sale was 10½ inches and the average weight two pounds. Ten years ago the average length was 13 inches and the weight three and one-half to four pounds. There are thirty-six factories on the coast of Maine where lobsters, sardines, herrings and mackerels are packed.

Considerable progress has been made by the Newfoundland Fisheries Commission in the way of lobster propagation. The work was taken up two years ago when the methods of the United States Fish Commission were adopted and their experience was made serviceable. A hatchery was located at Dildo Island. In the summer of 1889 4,039,000 lobster eggs were hatched, and the young lobsters planted around the head of Trinity Bay, the eggs having been obtained from lobster packing establishments in the vicinity. In prosecuting this work, Adolph Nielsen, superintendent, made the discovery that lobsters had two different times for spawning. The larger run of lobsters spawn from the middle of July till the middle of August, while the smaller and middle sized ones spawn during the latter part of October and the month of November. The commissioners make the following

statement in their report regarding the importance of the artificial propagation: "A means is thus provided which, if duly put into operation, will safeguard our lobster fishery from the injury or ruin which has overtaken so many of these industries in other countries, and already threatens our own. By establishing a lobster hatchery, or more than one, in each bay, the stock of lobsters may not only be maintained, but greatly increased; and at the same time, these valuable crustaceans may be planted in waters where at present they are not found, and their culture indefinitely extended." At Placentia Bay, Newfoundland, alone, 1,200 men and women are employed in the lobster industry. Five million is the annual catch, which represents $180,000 in value. Superintendent Nielsen has constructed floating hatching boxes by the aid of which it is possible to hatch lobsters when the eggs have reached a due stage of ripeness. By this means the immense number of eggs which are usually destroyed at the canning factories can be hatched, and thus the supply of lobsters be kept up. The average number of fertilized eggs carried by a lobster in the spawning season is placed at 12,000 to 18,000. The export of lobsters from Newfoundland has grown from 25,814 pounds in 1874 to 3,300,672 pounds in 1888, and the value from $124,997 in 1880 to $472,524 in 1889.

For the year 1890 the Newfoundland Commission state that success in the artificial hatching of lobsters exceeded their most sanguine expectations. There were 432 floating incubators in use, which were distributed at fourteen different stations. The percentage of loss in the apparatus was 28, as against 49½ in 1889. The result of the season's work was 406,005,300 young lobsters hatched and planted in good condition. "In the method now employed," say the commissioners, "we have obtained an invaluable means of arresting the decline in our lobster fisheries, which in many places threatens entire extinction, and of sustaining the stock of this valuable crustacean."

The depletion of the lobster fisheries has been especially noticeable in Canada. The report of 1888 showed a decrease in the value of exports of $350,000, as compared with the previous year, although there had been an advance in the price of 25 per cent. The value of the Canadian lobster fishery in 1888 was $1,483,388; in 1886, $2,638,394; in 1885, $2,613,731.

Superintendent Nielsen, of the Newfoundland fisheries, is a native of Norway, and his success in propagating lobsters has attracted a great deal of attention. In addition to artificial propagation, he believes in a closed season, when the lobsters will have a chance to propagate.

Lobsters are the more easily exterminated because they frequent shoal water within certain well defined areas, and are therefore the more easily captured. This fact renders the artificial propagation the more important, because the exhaustion of the species is rapid and certain.

The Las Vegas Irrigation Convention.

BY H. C. HOVEY.

An expert agriculturist, in whose company we crossed the great plains intersected by the Santa Fe route, exclaimed, concerning the arid regions of the Southwest, that boundless prosperity awaited them as soon as the irrigation problem should be solved. Granted a salubrious climate, wonderful scenery and inexhaustible soil, where is the water to come from? This very question that perplexed my Minnesota friend drew a convention of about 300 representative men to the opera house at Las Vegas, in the middle of March, whom we fortunately met before they were scattered again to the corners of the Territory. We also were guests at the Montezuma hotel, on the occasion of the grand "irrigation banquet," with which their three days' meeting ended. Thus we had an opportunity not only to discuss the grave problems of political economy, but also to watch at a safe distance the fantastic mazes of Mexican dances, and to see the most brilliant society of the Southwest. It should be added that the hotel is located near the noted thermal springs to which the aborigines resorted ages ago, and is attractive alike on account of its romantic environs and its admirable management.

The Las Vegas convention met pursuant to the suggestion made by the national irrigation congress held last September in Utah. By the courtesy of Governor Prince and Col. T. B. Mills, chairman of the executive committee, we were put in full possession of the proceedings, as well as of valuable facts, some of which will doubtless interest the general public. Incidentally it may be mentioned that a prominent place in the extensive library of Col. Mills is assigned to the bound volumes of the SCIENTIFIC AMERICAN, which he regards as an able ally in the work of developing the resources of our entire country.

Few may know that throughout these arid regions are the ruins of an ancient system of irrigation, that ages ago made this wilderness blossom as the rose. The autochthons who inhabited those curious houses on cliffs and in the jaws of caverns constructed acequias on levels so admirably surveyed as to be hardly improved on by all the appliances of modern science. In the country of San Juan, and elsewhere, the prehistoric aqueducts run side by side with the government ditches, and the cement with which they were laid is as firm and hard as if it had been spread last year instead of centuries ago. The vast plateaus that were thus made fertile in an era commonly described as barbaric should certainly be redeemed anew by this age of civilization.

Irrigation is no novelty, although comparatively little has been known of it in the Eastern States, and in large portions of Europe. The fact is that, to-day, more than half mankind subsist by means of irrigation, without which they could not till the soil that now yields them ample harvests. This explains the densely peopled areas of Asia. There are said to be 1,700,000,000 acres of arid land in the United States (not including Alaska); and of this vast area fully 76,000,000 acres lie within the bounds of New Mexico, sixty per cent of which acreage is thought to be susceptible of irrigation. Mining, the lumber business, and other important factors of public welfare, are to be estimated at their full value. The same is true concerning the raising of cattle and sheep, and other branches of industry. But after all the universal cry throughout the Territory seems now to be for water, and many are of the opinion that progress will mainly depend on the answer made by science and liberal legislation. Oddly the successful experiments in irrigation have thus far been in the four corners of New Mexico, while its great central regions are yet left without the needed supply. More than fifty companies have been organized to utilize and properly distribute the waste water through these thirsty acres. It has been demonstrated that water enough flows in sixty days of each year through the valley of the Rio Grande to inundate the entire arid area to the average depth of two feet. One half of that amount, added to the average annual rainfall, will insure the perfection of all crops, making a total of 33 inches, allowing for evaporation. There are enough natural reservoirs, with a little additional outlay, to store all the water that now runs to waste. There is a single basin for such a natural reservoir, west of Albuquerque, thirteen miles long, four miles wide and a hundred feet deep. The water that might be stored between these natural banks would irrigate seventy-five miles of territory as far south as the Mexican line. That reservoir could be fed from the Rio Grande by a ditch fifty miles long. Another natural basin near Las Vegas, four miles long, two miles wide, and a hundred feet deep, could be filled from the Moro, Sapillo, and Gallinas rivers by ditches from ten to twelve miles long. There are many smaller basins scattered over the Territory. It has also been proved that great bodies of subterranean water underlie a large part of the region, which could be tapped by artesian wells. Thus it is certain that the land could be well watered throughout by the use of the proper means.

As illustrating possibilities we may refer to what has been done in the Pecos valley, where, from reservoirs (one of which is seven miles long and two miles wide) 400,000 acres are now under successful irrigation. About 100,000 acres of the great Maxwell grant and about 30,000 of the Montoya grant are irrigated. The results for last year were wonderful. The soil of the Maxwell grant is especially adapted for beet culture. But it is found desirable to restrain the growth of the crop. Beets are capable of attaining an immense size, but at the cost of sweetness. A beet that weighs three and a half pounds contains all the saccharine matter possible—all above that weight being found to diminish the proportion of sugar. By judicious irrigation Mr. Pelles, the manager of the Maxwell grant, got 15 per cent of saccharine matter from 100 weight, the average yield being 18 tons per acre. It costs but little more to raise sugar beets than corn; but the return, at the above rate, would be from $75 to $100 per acre. As the basis on which the sugar factories buy the beets is at the rate of $4.50 per ton, with 10 per cent saccharine matter, of course the yield in New Mexico, as already stated, would be proportionally more remunerative. There are in the United States seven sugar beet factories, that produced, in 1891, 27,000,000 pounds of refined sugar. In that same year we imported $90,000,000 worth of sugar. The people of New Mexico claim that that amount could be raised in their Territory alone, with irrigation, and allow a surplus for exportation. They refer also to the fact that the importation of raisins in 1891 amounted to $20,000,000; and affirm that this entire amount could be raised here with due irrigation. An arid country is needed for drying raisin grapes in the sun; for the cost of artificial drying would be too great. The profit from raisin culture is from $200 to $300 per acre, and the only parts of the United States suitable for it are Southern California, Arizona and New Mexico. In Eddy County, N. M., as the direct sequel of recent irrigation, one grower has this year planted 1,200 acres of raisin grapes. Somewhat similar statements might be made concerning the cereals, alfalfa, and all kinds of fruits.

The object in giving the foregoing facts is to explain why there is such enthusiasm in this region on a subject that elsewhere may be more safely regarded with indifference. In conversation with the governor, secretary, surveyor-general, and other officials, the opinion was most positively expressed that the future of the Southwest mainly depended on the solution of the irrigation problem. And the same conclusion was unanimously voiced by the resolutions passed at the Las Vegas convention. The settlers on the great plains have invested millions of dollars, not as speculators, but as home seekers, only to discover that the most fertile lands in the world are worthless without water. What can a farmer owning but 160 acres, or even 1,000 acres, do individually toward remedying this deficiency? Generally he is powerless. The recent laws of the United States operate to prevent the formation of great monopolies for reclaiming wide regions of arid land. The new States and Territories are hindered in many ways from developing their best resources. Most of the public domain, not yet sold or otherwise disposed of, can only be cultivated by costly canals, reservoirs or artesian wells. The mountain snow fields, the deep canons, and the raging torrents, can hardly become private property, or even the property of ordinary corporations; and yet these are the original sources of irrigation. The outlay required is so vast that the general government can hardly be expected to reconcile the more favored regions of the North and East to consent to any adequate plan. Yet fears of the complications that might arise were any other method adopted than by governmental control cause considerable opposition, on the part of some persons, to plans of a different nature and that commend themselves to the majority of those who are most deeply interested.

Every shade of sentiment was brought out at the Las Vegas convention. But after a three days' discussion a series of resolutions was adopted, with I believe but one dissenting vote, declaring in favor of having the United States cede to the States and Territories within whose boundaries are located the "arid lands," all lands of this description, on condition that each State or Territory shall at once begin the proper work of irrigation, pledging such portion of said lands as may be necessary to raise funds, but finally selling them to none but actual settlers. The resolutions also contemplated having the timber lands, mining lands, etc., ceded likewise, to aid in reclaiming irrigable lands, or to go to swell a general school fund. In brief the resolutions indorse the bill introduced by Senator Warren, of Wyoming, for turning the arid lands over to the States and Territories on condition that they shall redeem them through irrigation.

Other business was transacted of a more strictly local character; and, in an informal way, the convention expressed itself as in favor of early statehood for New Mexico, as solving many of the vexing problems that are now so discouraging and that deter the best class of immigrants from seeking homes within its borders, as they might otherwise do.

Drainage of a Small Lake.

From the Cleveland offices of the Lake Superior, Cleveland and Pittsburg & Lake Angeline mining companies it is announced officially that work on the project of draining Lake Angeline has begun under a contract calling for its completion in five months, so says the *Marine Review*. The lake covers an area of 153 acres, and has a maximum depth of 43 feet, with a mean depth of 20 feet. The lake is owned by these companies, whose mines are already being worked beneath it, the Lake Superior and Cleveland companies controlling about equal portions of all but about one-fifth of the property, which is owned by the Lake Angeline company. This large body of water is being removed as a matter of safety to the present underground workings, but there is no telling, of course, what may be done in the way of further development of the properties when the water is out of the way. The companies undertaking this work are among the strongest in the mining business of Lake Superior, and there is little doubt that it will be carried out successfully. The contractor is C. B. Howell, of New York. A crib will be sunk while the ice is still on the lake. A centrifugal pump having a 20 inch suction and a 22 inch discharge, with a capacity of 15,000 to 20,000 gallons a minute, will be used, and the water will be discharged into the Carp River.

Extermination of the Texas Peccaries.

A recent publication of the National Museum contains a paper, by Mr. Frederic A. Lucas, on animals recently extinct or threatened with extermination. He finds that in nearly every instance the cause is "reckless slaughter by man." As an instance of the way in which animals may be destroyed, he refers in the introduction to peccaries. In 1885 these little animals were so abundant in several counties of Texas that their well-worn tails were everywhere to be seen, while their favorite haunts could be readily picked out by the peculiar musky odor characteristic of the creatures. Shortly after that date, hogskin goods being in favor, a price of fifty cents each was offered for peccary hides, with the result that by 1890 the peccaries were practically exterminated.

AN IMPROVED RIFLE SIGHT.

The illustration represents a rear sight for a rifle, which is adapted to be easily and nicely adjusted, and is especially designed to make proper allowance for the wind in the setting of the sight. It has been patented by Mr. Robert W. Parker, of Camp Huachuca, Arizona Ter. Fig. 1 is a perspective view of the device applied to a rifle barrel, Fig. 2 being a broken plan view, partly in section, showing the construction and operation of the wind gauge and the means for fastening the leaf to the base of the sight, while Fig. 3 is a central longitudinal section. The base of the sight is secured to the barrel in the usual way, and at its rear it is marked to serve as a wind gauge, indicating the extent to which a supplemental base is moved to one side or the other. This supplemental base slides horizontally in the main base and moves laterally on a dovetail rib, having a transverse toothed rack in front of the rib meshing with teeth on the rear end of a pinion pivoted in a recess in the base. The forward end of the pinion meshes with a transverse worm terminating at one end in a milled wheel, by turning which the supplemental base is moved out or in. Hinged to the rear of the supplemental base is a vertically swinging leaf, its pivoted end pressing upon a spring which holds the leaf in a vertical position when it is tipped up. When the sight is used for point blank shooting the leaf is turned down, the peep hole being made elliptical. The leaf is slotted, and a slide is held to move in the slot, the leaf also having counter grooves in which slides a head, moving obliquely when pushed up to counteract the drift of the bullet, the slide and head being connected, and each having peep holes to be used as sights, gauge marks on each side of the leaf indicating the range of the rifle when either peep hole is used. A novel mechanism is provided for raising the slide and holding it at the desired adjustment. If there is but little or no wind, the supplemental base and the mechanism carried on it are centrally held, but if there is considerable wind, the base is moved to the right or left as desired.

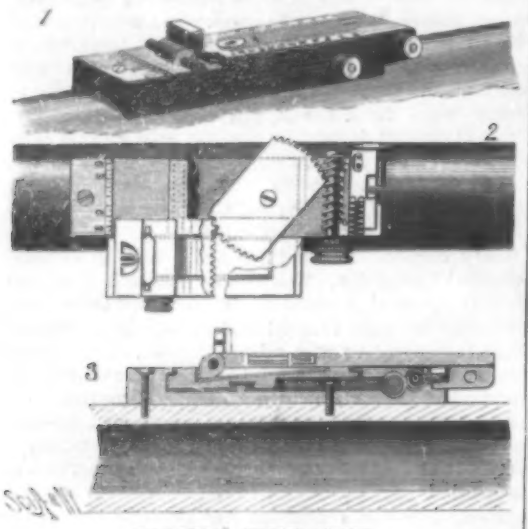

PARKER'S RIFLE SIGHT.

EXPERIMENT IN CAPILLARITY.

T. O'CONOR SLOANE, PH.D.

A very pretty experiment in capillary force, adapted for projection by the magic lantern, is shown in the cut. It illustrates the attraction and repulsion between bodies surrounded by like or unlike liquid surfaces. If a body is partly immersed in a liquid which wets it, the liquid surface will rise in a curve all along its wetted surface, forming part of a concave meniscus. If another body in similar condition is brought near it, the two will be attracted and, if permitted, will be drawn together so as to adhere. This is shown by floating a glass ball in a vessel partly filled with water. Sooner or later it goes to the side and stays there in contact with the side of the vessel.

EXPERIMENT IN CAPILLARITY.

If a body not wet by water is immersed in it, the liquid will curve downward where it meets its surface, forming part of a convex meniscus. If two such surfaces are brought near together in the same liquid, they will attract each other also. An iron ball floating in a glass of mercury is drawn to the sides of the vessel, because the mercury does not wet either iron or glass.

In the experiment illustrated a straight-walled tube, about an inch in diameter, is connected with a funnel, by an open tube at its bottom and by a short piece of India rubber tube. The tube and funnel contain water. No air must be left in the rubber tube. As the funnel is raised or lowered, the level of the liquid in the tube will rise or fall. If the edges of the tube are perfectly dry or, still better, are oiled or coated with paraffine or beeswax, the liquid can be forced up far above the level of the tube, so as to form a meniscus. This, when projected by the lantern, especially if a reversing prism is used, will form in itself a very striking object.

A ball, which may be a Christmas tree ball, with any apertures closed by sealing wax, is floated in the tube. As long as the water is below the top of the tube, the ball will stick to the side of the tube. Now, on raising the funnel, the liquid will rise, carrying the ball with it. As it reaches the top of the tube and rises above it, it forms the convex meniscus. As this occurs, the ball, as if by magic, sails away from the side to the center, and remains there. If displaced, it returns to the center. On lowering the funnel, it again goes to the side as the convex meniscus gives place to a concave one.

This method of changing the water level is to be recommended, as it avoids the necessity of introducing anything from above, whether water or a solid object, in order to raise the level of the liquid. As shown in the cut, it is mounted for projection by the experimental lantern.

A Word to Inventors.

The following good advice to patentees we copy from the *Manufacturers' Gazette* (Boston). We commend it to the attention of patentees generally, who are too apt to reject very good offers for their patents soon after their issue.

We have frequently been asked by inventors who have succeeded in producing small articles of more or less merit, and for which there appears to be a demand, what is the best method to pursue in order to put them on the market.

This is a question which has puzzled a great many, and especially those who with small means are unable to go into the manufacturing of their specialty on a large scale, without parting with a controlling interest in their patent to another party in order to raise the necessary capital with which to push the business, a transaction which many object to on account of the possible and probable consequences which often follow, viz., the loss not only of the patent right, but of all share in future business.

In nine cases out of ten it is far better for the inventor, and he will realize more from his invention, to sell out entirely, and turn his attention to some other business, or the production of a new patentable article. That is, in case he has no money with which to develop and place his invention in the market.

The only difficulty in this is that a majority of inventors set too high value upon their inventions. They think they have the world in their hands, and are disposed to hold on to it, unless some one comes along who is foolish enough to pay an unreasonable price for the patent. This is where they are often mistaken, and it would be far better for them to accept a *bona fide* offer, even though it is but a fraction of their ideal value of the article.

The fact is that no invention, however valuable at the time it is produced or perfected, is sure of a monopoly or even a fair competing chance for a great while, and the sooner the inventor disposes of it, the better off he is. Thousands of inventions have been dead failures, and never returned to the inventor one dollar, simply because, thinking that he held a monopoly, and that the world was bound to him, he has held on to it, unable himself to put it upon the market, and alike unwilling to allow any one else to do so for a reasonable consideration, until some one else has come out with something equally good, and possibly an improvement, and he finds himself without a bidder, and another man making money which he might have had, had he used better judgment and good sense.

Another way in which a mistake is made is in starting out on too large a scale. If you have a really valuable patented article, there is very little difficulty about finding a market for it, if you are not too hasty. It is better to begin in a small way and gradually increase, than to begin by forming a large stock company and beginning too large. We are speaking in reference to the inventor's interests. If he can get his goods manufactured so that he can handle them himself, even though in a small way at the start, if his invention is worth anything, he will soon be able to increase his business and can then hold control of it himself. As a rule, we are of the opinion that it is better to contract with some reliable firm for the manufacture of the article than to go to the expense of putting in the necessary machinery, etc., to do it for yourself. This is especially true in relation to the smaller articles.

By doing it in this way, you are saved the care and management of a shop, and have more time to devote to pushing the sale of the article, and the difference in the cost is very little—hardly sufficient to compensate for the possible saving.

It also gives you the use of the capital which would be required to fit up and maintain a shop, with which to push the business, and at a time when it is needed, too.

After the business has grown sufficiently large to warrant it, then there is time enough to put in a plant, and you will be better able to do so, and you will be in a position to know what is required.

AN IMPROVED CRUDE OIL BURNER.

The competition between oil fuel and coal is a most interesting one, and certainly shows an increasing use of oil where the conditions are favorable for its employment. Perhaps the most conspicuous of the advantages possessed by oil over coal as a fuel is the readiness with which the most intense heat can be employed at any special point desired, and the economy with which it can be used for just the period required.

In addition there is a great saving of labor in the use of oil, and, as there are no ashes made, all the work around the boilers and furnaces can be kept in a much more cleanly condition.

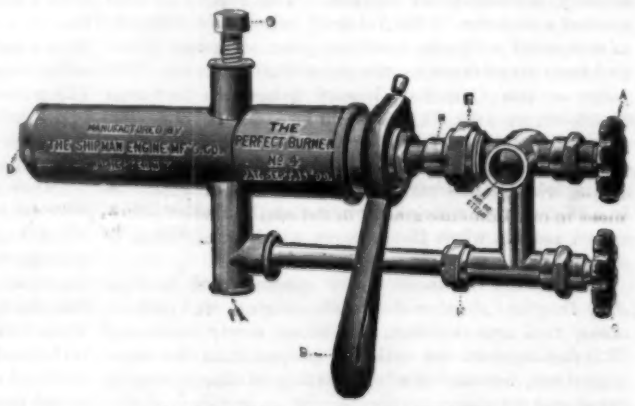

AN IMPROVED CRUDE OIL BURNER.

The obvious advantages possessed by oil have led to much experiment in designing the most efficient burner, and the one shown in the accompanying illustration, recently put upon the market by the Shipman Engine Mfg. Company, of Rochester, N. Y., is claimed to practically effect the most complete atomizing of the oil, thus insuring the most perfect combustion. It is also safe, because the oil is sucked up by the burner from the tank below its level, instead of being fed from a tank above, and depending on regulating devices, although it will work in either way. The regulation is effected by means of the lever shown, which is attached to the oil sleeve. In case of clogging, by opening the cleaner valve steam is allowed to pass through the oil chamber, cleaning the burner, without disconnecting any pipes at all. Likewise, the oil chilled or thickened by cold may be warmed and made to run freely by first closing the oil sleeve and then opening the cleaner valve, which will allow the steam to free its way up the oil supply pipe. The claim is also made that in point of economy in combustion it is unexcelled by any other petroleum oil burner. It is made in six sizes, and, as all the parts are interchangeable, cost of repairs is reduced to a minimum. In the illustration, A represents the steam valve; B, the oil regulating lever; C, the cleaner valve; D, the mouth of the burner; G, screw for attaching burner to boiler or furnace front.

The economy of using oil is now becoming recognized in many lines of business where it had heretofore been deemed inadmissible, and it has been found suitable for nearly all purposes that coal is used for, working successfully on boilers, brick kilns, forges, ovens, salt evaporators, driers, etc.

Compressed Air in Chicago.

An ordinance has been passed and signed by the mayor of Chicago giving permission to a company known as the Chicago Power, Supply, and Smoke Abating Company to lay pipes in the streets of that city for the transmission of compressed air as a motive power for machinery.

MUIR GLACIER, ALASKA.*

BY G. F. BALDWIN.

The first known of that greatest of Alaska's wonders, the Muir glacier, was reported in the account of Vancouver's explorations about Sitka in 1794, where he describes what is supposed to have been Glacier Bay as completely filled with ice and "terminated by compact, solid mountains of ice rising perpendicular from the water's edge." In 1879 the glacier was first described by Prof. John Muir, who spent some days wandering over the ice, a blanket and a few biscuits on his back and only the ominous roar of the sub-glacial waters to break the solitude. His vivid description, seconded by the tales told by Dick or "Professor" Willoughby, an old hunter of that region, led the steamer company to explore the bay, and now every steamer makes the extra journey of fifty miles necessary to allow its load of tourists to set foot on this great frozen sea.

As the steamer turns into Glacier Bay, what a marvelous sight appears! To the west the great St. Elias Alps tower above; Mt. Crillon (15,900 feet high), Mt. Fairweather (15,500 feet high), La Perouse, Lituya, and others nearly as high, covered with snow and ice to within four thousand feet of the sea, sending immense glaciers down to the ocean on one side and to the bay on the other.

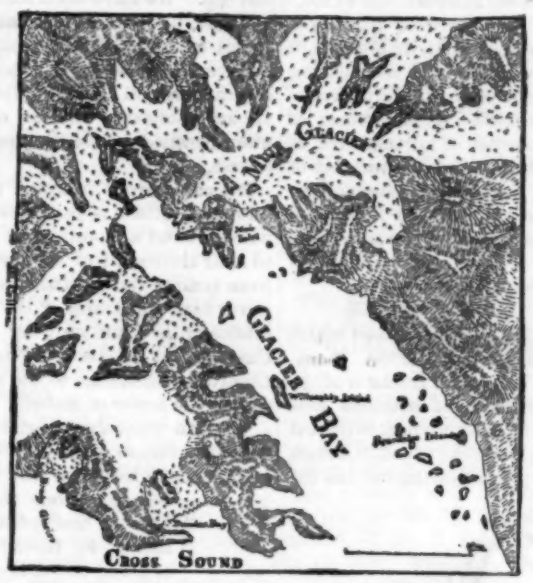

Map of Glacier Bay, Alaska, and its surroundings. Arrow points indicate glacial area. (Courtesy of Prof. G. F. Wright.)

Map of Muir Inlet, showing converging moraines and form of front in 1886. A, buried forest; B, base-line. (Courtesy of Prof. G. F. Wright.)

A ring of peaks from eight to ten thousand feet high form the background to the north and east, a few of them bare of snow, but only because so precipitous. And now while we speak a great white cloud wraps itself gently about one of these bare peaks only to disclose it to view in a few minutes, shrouded in white fresh snow.

From the flanks of these mountains come great frozen rivers, flowing steadily though slowly on to meet in one immense glacier in the amphitheater below, and march majestically on to the front to join in the cannonading of the icebergs.

At the head, the long, narrow bay divides into two inlets. The next one, as yet not named, contains several glaciers which have not been explored. The Muir Inlet, to the east, is perhaps five miles long and two to three miles wide; on either side mountains rise abruptly, often perpendicularly, for the land here is "all on end," as is the whole of our northwest coast; at the head a wall of blue ice, a mile long and about four hundred feet high, cut into towers, castles, and caverns, threatens with groaning and thundering, as prisms from the size of a paving stone to the size of the Cologne Cathedral go crashing down to the water, throwing the salt spray hundreds of feet into the air, sending forth waves to lash the shores throughout the bay and echoing among the mountains as a thunder storm.

These icebergs float off down the bay, some stranding and melting where they are confined; others, pushed about by wind and tide, form impassable jams, ringing merrily as the waves rock them back and forth.

The ascent of one of the neighboring mountains discovers the home of the mountain sheep, for to the height of three thousand feet there extends a rich carpet of grass, and many familiar flowers, as the epilobium, goldenrod, and blue-bell, remind one of home, while each little ravine contains its snow bank and the accompanying pool of clear, cold water. The scene from here is magnificent; high mountains on every side, and nestled at our feet, this great sea of ice thirty miles in diameter and formed of many branches, any one of which is as large as the Gomer or Aletsch of Switzerland.

This glacier is as large as all the Alpine glaciers together, twelve hundred square miles, an area equal to Lehigh, Northampton, and Carbon Counties in Pennsylvania combined, and a thousand feet deep at the mouth, three hundred feet above water, seven hundred feet perpendicular below the surface. It contains more water than Lake Erie, and it is estimated that seventy-seven billion cubic feet of ice are discharged into the bay as icebergs every year, and no less than one hundred and seventy-five billion cubic feet of water melt from the surface and flow into the bay as sub-glacial streams in a year.

The most rapid motion is from the north through the center, and so rough is the ice here that it is impossible to cross it. Immense crevasses, ridges, pyramids, and towers are mingled in the wildest confusion, as in a stormy sea; moraines and bowlders—all that dare approach are swallowed up in the yawning crevasse.

The ice of the eastern half is moving much more slowly and is consequently much smoother, broken only here and there by crevasses, so that one may walk for miles up the glacier at a gradual ascent of one hundred feet to the mile until the névé is reached.

During the summer the surface disintegrates and melts off two inches a day, forming thousands of little rivers flowing in all directions and joining in larger streams until finally they reach a crevasse or a round deep hole, called a moulin, into which the waters are precipitated to join the rumbling streams beneath.

While the surface appears white, a glance into a moulin tells a different story, for just below this white ice a clear sea-green appears, which grows darker and clearer as the ice is thicker, until an intense blue beckons us to the crystal depths.

The slower moving ice is often heavily loaded with stones and earth, for of course each branch bears two loads of moraine in to the great basin, and this protects the ice from the sun as a blanket until the moraine forms a ridge, and on this ridge each large stone by further protection is raised on a pillar of ice often several feet above the general level. Here are collections already made for the geologists, and besides granites, some peak many miles back has sent specimens of silver ore, while another has tried to rival Carrara for marble.

When Professor Wright tried to measure the motion in 1886 he found it was practically impossible to set a line of stakes across the glacier, partly because the surface melts off so rapidly, but mainly because of the roughness of the central portions; then, after a base line had been established and accurately measured, it was suddenly discovered that the base line was on moraine-covered ice and probably moving. Finally a base line was staked off on dry land and measurements taken on certain peculiarly shaped ice pillars at various distances, and the angles read every four days.

The motion found by Professor Wright was in the center about sixty-five feet a day, and less, of course, nearer the sides. That seems very rapid when compared to the Alpine thirty-three inches a day, but here we have an enormous mass of ice all crowding through a narrow opening, but pressing toward that opening from every side. The width and depth of the ice greatly reduces friction.

Since the Muir glacier was measured, a similar rate has been found in a number of glaciers in Greenland, and in one case a rate of ninety feet a day was found. In 1890, when Professor Reid measured the motion, the front was found to have retreated more than half a mile, so that the first two branches barely, if at all, added their pressure, and the rate was increased.

The width of the water front is about a mile, but the whole width between the mountains at the mouth is about two miles. On either side is a triangular patch of moraine half a mile wide at the head, in which the glacier ends, and extending about two miles down the inlet, separating the water from the foot of the mountains, but narrowing and disappearing beyond that point.

Near the foot of the mountain, on the east side, a large subglacial stream bursts forth, under a considerable pressure, so that a column of water three feet in diameter boils up to a height of about four feet.

Not only do great columns of ice break off above water and become bergs, but quite often large blue masses rise from the bottom and these usually carry quantities of debris, locked in their embrace, to be dropped one by one, as the berg melts, into the fine deposit just described. Here is formed what is known as modified drift.

Examining the terminal moraines at the sides, we find very few scratched stones and very little chance to study the deposits made beneath the ice, for it is all covered by the coarse material of surface moraines—bowlders of all shapes and sizes, sharply angled and mixed with very little fine clay, very different in appearance from the till near Belvidere, yet having the same unstratified, plums-in-a-pudding character.

It seems that the glacier has been receding for many years, and as it has retreated the side streams have cut new and shorter channels successively, until there are now on the east side nearly a dozen such empty channels and as many parallel ridges.

One form of deposit, which has led to great misunderstanding as found in the States, is shown at the Muir glacier, but not so well as that found by Mr. Russell in the summer of 1891 on the Malaspina glacier near Mt. Saint Elias. Sometimes the surface water, unable to find escape, is held backed up into a lake against the mountains at the side, there to form a true lake terrace. This may explain many of the high level terraces found in the glaciated area, without the great submergence sometimes claimed. Mr. Cushing, who visited the glacier with Prof. Reid in 1890, describes several of these lakes as found near the heads of valleys of the eastern side. The stream which cuts through the moraine of the west side has uncovered an ancient forest buried deep in the glacial sands.

Rooted in the peat and sending their roots far into the blue clay are many stumps or trunks of trees of various sizes, from an inch or two to more than a foot in diameter, quite bare of bark and invariably broken off at a height of ten to twenty feet and the top bruised

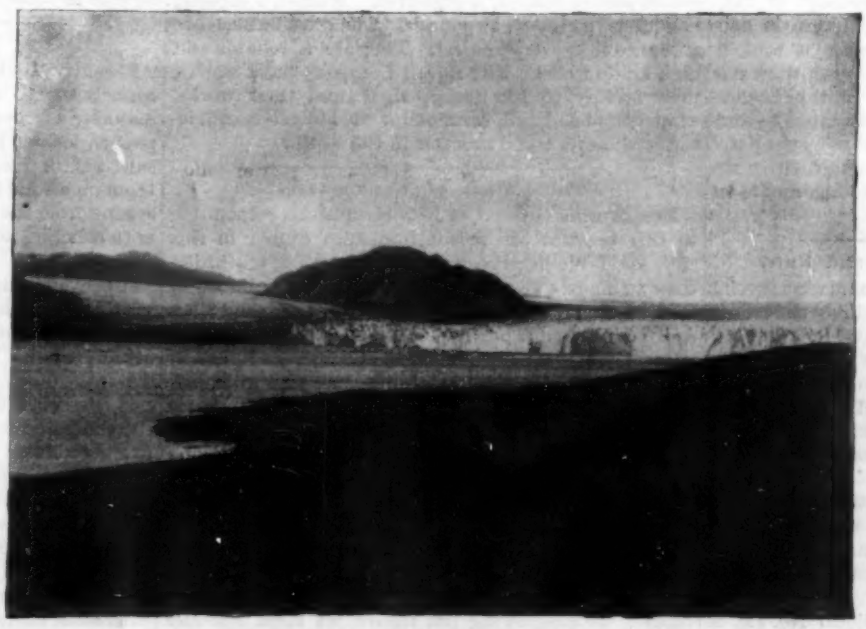

MUIR GLACIER, ALASKA.

(From a photograph by J. F. Morse, Cleveland, O.)

* Abstract from the *Lehigh Quarterly* for January, 1892.

in the direction down the inlet. This forest has been covered to a depth of nearly a hundred feet by the fine sand of a portion of the moraine, which extends several miles down the inlet, on that side, at a constantly decreasing altitude. The fact is that since these trees grew the glacier has advanced until it glided over the trees and over this whole moraine, then it has receded again and a little stream is now doing what the great glacier could not do, root out the trees.

How long the ice may have passed over the buried forest, or how old the trees are, cannot be certainly stated, but the ice must have filled Glacier Bay since the trees grew, and that must have been several hundred years ago—and may have been several thousand. Yet the wood is now so fresh that it might well be but a few years old. That the ice filled Glacier Bay within a few hundred years is very evident from the condition of the vegetation, for there are no trees nearer than Beardslee Islands, though the conditions are very favorable. The smaller vegetation has spread more rapidly and covers the mountains, while it is gaining some foothold on the moraines about the mouth. Here the plants grow less in quantity and variety nearer the glacier, until within half a mile of the ice no plants are found. Again the mountain sides are very handsomely grooved to a height of 3,000 feet, and even the polish is well shown, though rocks in this atmosphere disintegrate very rapidly. Debris, too, can be found at a height of 3,000 feet, and Vancouver's descriptions seem to show that the ice in his time, though not filling the bay, extended much farther down. Not only has the glacier retreated a long distance since Vancouver's time, but it is now retreating very rapidly. Photographs taken by Professor Reid's party in 1890 show that the front has receded about 3,000 feet in four years, and the steamer company report that since 1883 it has receded over a mile. The ice front has decreased in thickness also, for it is now at the same height, above water, 300 feet, but back at a point which was 400 feet high in 1886. Mr. Cushing shows that the glacier is dying out, about the heads, with equal rapidity, so that the ice retreats from the mountains into the basin and the source of supply is cut off.

Railway Rust.

The rusting of rails in long tunnels is the subject of a recent article in the *Civil Ingenieur*, describing the results of observations in the Altenberg tunnel, which is about 1,230 feet long and located on a curve of 2,950 feet radius. The rails had been down for 11 years, and at the end of that time were covered to a depth of 0·16 to 0·24 inch by hard scales, which could only be removed by a knife. They were composed mainly of iron sulphide, and were found principally on the web. While the weight of the rail was much reduced in this manner, its sectional area was found to have increased, owing to the flaky character of the rust. The new rails have been covered with a mixture consisting largely of tar, which is renewed every six months. The gravel ballast has also received a partial covering of broken limestone, and by these means it is hoped that the formation of rust will be retarded. In the Brandleite tunnel, in Thuringen, it was found that rails and metal ties were destroyed by rust as fast as by the passing trains. The ties lost about 5·9 pounds each in six years. This tunnel is nearly 10,000 feet long, and is on a tangent having a 1 per cent grade.

Tropic and Semitropic Fruits and Nuts.

For the first time the Census Office has made a special investigation for the purpose of ascertaining the extent and value of the production of oranges, lemons, figs, almonds, cocoanuts, and other tropic and semitropic fruits and nuts as industries of the United States. A preliminary report has been prepared by Mr. J. H. Hale, special agent, under the direction of Mr. Mortimer Whitehead, special agent in charge of horticulture.

The material from which these statistics are compiled was obtained direct from the growers upon schedules specially prepared for that purpose and by personal visits of special agents to sections of the country where these products are grown.

From the tabulations in Census Bulletin No. 161, it appears that, in addition to the tropic and semitropic fruits and nuts grown for home and family use, there were in the census year 13,515 acres of almond, 677·50 of banana, 169·88 of citron, 9,864 of cocoanut, 4,477 of fig, 550 of guava, 1,362·25 of kaki, 7,256 of lemon, 495·58 of lime, 12,180 of madeira nut, 7,097 of olive, 184,008 of orange, 2,189·50 of pineapple, 171·80 of pomelo, and 27,419·50 of pecan trees, representing 658,566 bearing and 800,010 nonbearing almond trees, 377,782 bearing banana plants, 4,237 bearing and 14,110 nonbearing citron trees, 128,227 bearing and 1,199,549 nonbearing cocoanut trees, 138,186 bearing and 285,201 nonbearing fig trees, 32,943 bearing and 120,329 nonbearing guava trees, 58,390 bearing and 124,523 nonbearing kaki trees, 167,663 bearing and 498,784 nonbearing lemon trees, 19,096 bearing and 44,255 nonbearing lime trees, 188,409 bearing and 411,248 nonbearing madeira nut trees, 278,360 bearing and 331,023 nonbearing olive trees, 3,885,890 bearing and 9,705,246 nonbearing orange trees, 21,750,000 pineapple plants, 3,279 bearing and 12,867 nonbearing pomelo trees, and 214,988 bearing and 657,980 nonbearing pecan trees.

Excluding pineapples and bananas, which are all counted as bearing plants, as they commence fruiting within a year of planting, it will be noted that the average number of all nonbearing trees is about double that of the bearing trees, the product of which in the census year was, as far as reported, valued at $14,116,-296.59, divided as follows: Almond $1,525,109.80, banana $280,653.75, cocoanut $251,217.41, fig $307,271.76, lemon $988,099.92, lime $62,496.90, madeira nut $1,256,-958, olive $386,368.82, orange $6,602,099.06, pineapple $812,159.17, pomelo $27,216, and pecan $1,616,576.50. On the basis of present prices, with all the nonbearing trees in fruitage, the next census ought to show a value of product of more than $50,000,000. As a forecast of the future growth of these branches of horticulture, in addition to the acreage already planted, the number of acres of land in the United States susceptible of development in plant in any one or all of the fruits and nuts named has been ascertained, and the aggregate figures are also given.

THE LOVELL DIAMOND SAFETY BICYCLE.

The accompanying cut shows the 1892 model which the John P. Lovell Arms Company, of Boston, Mass., have just placed on the market. The frame is of the diamond pattern, and made entirely of seamless steel tubing and drop steel forgings. Front wheel 30 inches, with 1¾ inch pneumatic tire; and rear wheel 28 inches, with 2 inch pneumatic tire; ball bearings of the improved pattern to wheels, crank shaft, pedals, and head; gear, 57 or 60 inches. Scorcher saddle and loop saddle post furnished, if preferred. Weight, complete, 43 pounds; stripped, 38 pounds. The Lovell wheels are guaranteed in every respect. They are a reliable and high grade wheel. The Lovell Company have moved their factory to Fitchburg, Mass., and their works, when completed, will form one of the largest manufactories of bicycles and firearms in the world.

THE LOVELL DIAMOND SAFETY BICYCLE.

The Future of Manufacture.

Ex-Governor Goodell, of New Hampshire, responding to this toast at the recent hardware dinner in this city, said: We have been told this evening truthfully that we made a year or two ago about ten millions of tons of iron in this country. This is certainly an enormous amount, but it is easily explained, yet, when we remember that, when we make 10,000,000 tons of pig iron in a year, we are making 27,000 tons in a day, and we are making a car load of pig iron a minute for every day of the year counting Sundays and holidays, are we to continue such an enormous production? Can this country consume such a quantity? Or are we in the near future to find such a reversion in this business that many of our furnaces will be obliged to bank their fires and go out of blast? It is a question too much for me, and I think, possibly, too much for you to decide. Yet I have great confidence in the future. In considering the future we must consider the past. A few years ago our bridges were all made of wood, with the exception of a few bolts and pins. Now they are made almost wholly of iron. A few years ago our fences were made almost wholly of wood. Now barbed wire is used everywhere and the barbed wire business is one of the largest in the country. It is spreading all over the country, and it is likely to spread more and more in the future. We are constantly designing and discovering uses for iron and steel. Last night, as I was riding in a railway car, a fellow passenger asked what would the railroads do for ties in a short time. I then remember that just a few days before I had heard that steel ties had been put into use and that very soon it would be likely that they would take the place of the wooden ones on every railroad in the country. Then, when I remember that invention is going on all the time; when I realize that Morse, Fulton, Edison, and all the greatest inventors of history have been Americans; when I realize that a few years ago a hall like this would have been lighted with sperm oil distributed from New Bedford, then a little later by gas, and that to-night we have this beautiful light, I have great hopes for the future of manufacture.

You tell me that we are living in a generation the like of which has never been known in the earth's history, and you will also perhaps tell me that we are living in a generation the like of which will never be known again, but I believe that we have just begun to discover great things. What they will be no one can tell. We have been told about iron in the blood to-night, how it makes mind and muscle strong. My friend and myself are strong prohibitionists and we believe that the time is speedily coming when prohibitionists will have prohibition, and when those who are accustomed to the use of such things as produce intemperance will be seeking it as a substitute. (Applause.)

We can hardly conceive of its various uses. I am told that Edison is just now engaged in putting up wires around a mountain of iron, by which he expects to hear the sound of the great explosions that occur from time to time in the sun. I am afraid that I shall never hear the sound of the explosions in that great luminary, as I am growing old, and I am afraid, too, that should he be able to hear them, the great Creator of all things would cause him confusion as he did at the tower of Babel.

We can scarcely imagine, in the midst of all this, what the future is going to bring us. I have great confidence in her gifts, but perhaps something should be said about the profits in the manufacture of the future. Are we going to make money by them? The price of everything is going down, is cheaper to-day than yesterday. A few years ago, the price of steel was 10 cents a pound, and we can buy just as good steel now for a third of that sum. The price has been constantly decreasing in almost every branch of manufacture. We are constantly being told that the price is so low and the profits so small that we will be obliged to give up business soon. I tell you that we old fellows who have an oldish way of doing business, a rut in which we have been accustomed to let things run, and who think that we can do business in no other way, will be obliged to go out of the trade. We will go to the wall, but the young man with his eyes open, and who is awake to the responsibilities of his position and who is not content to remain in the groove of his father's methods, which were the proper ones thirty years ago, will devise some new method, some new way, and he will produce the goods we have been selling at a ruinous loss so that he will be able to make money on them.

Cement Floors.

Recently I visited a newspaper pressroom, says a contributor to the *Art Printer*, which was, like the majority of pressrooms, especially those for newspapers, located in the basement of the building—an essential in placing a large machine or a number of them on a solid foundation. To prevent the dampness arising from the earth and injuring the press and rollers a concrete floor had been laid before the press was set up.

After examining the press, the pressman informed the writer that he had swept the floor several times during the day, but that the dust seemed to accumulate rapidly again. No dust was blown in from the outside when the doors were opened, as the ground was frozen and covered with snow. The dust was ground out of the concrete by the tramping of the persons employed in the room.

This dust is not like the ordinary house dust, but is of a coarse, gritty nature, and when blown about the press by the circulation of air through the room is sure to settle on the joints, journal boxes, and in the oil holes and fountain, no matter how carefully they may be covered or protected, and in a short time will do incalculable injury to the machine.

Joists should first be laid and the spaces between them filled with concrete until nearly level with the top, and a well joined, hard wood floor laid over all, which will wear better than the concrete and be more satisfactory than any other floor that can be put in a printing office or workshop. The proprietors of printing offices, who contemplate the erection of new buildings or repairs, would do well to make a note of this.

[The trouble above mentioned was due to poor cement, which did not bind the sand. First class Portland cement one part, fine, sharp, clean sand two parts, properly mixed and laid, will make a superior floor—a veritable artificial stone, which ordinary use will not abrade.—ED. S. A.]

"A TRIP TO THE MOON."

This is the title of an illustrated scientific lecture presented biweekly at the Carnegie Music Hall, in this city. The Urania Astronomical Society, of Berlin, brought out this unique spectacle three years ago, since which time it has enjoyed great popularity. The managers of Music Hall—founded by Mr. Andrew Carnegie—secured not long since the scenery and apparatus for production at that hall. The lecture, since its introduction here, has been rewritten by Mr. Garrett P. Serviss, the well known astronomer and astronomical lecturer, and it is now presented in a manner which commands great interest and attention. The lecture is opened by some interesting statistics regarding distances, masses, etc., which are well calculated to astonish the unastronomical hearer. The first scene is the reproduction of a solar eclipse as it was seen from the shores of one of the Havel lakes, near Berlin, on the morning of August 19, 1887. On this morning the sun arose with the greater portion of its disk obscured by the moon. As the sun ascended, the crescent diminished, and at the moment of totality the wonderful corona flashed into view. This scene gives the listener an idea of what the astronomers mean when they attempt to describe this wonderful phenomenon. Slowly the moon passes from before the sun until the earth is fully illuminated and the sky and landscape assume their normal appearance.

Interesting as these imitations of celestial and terrestrial phenomena are, the manner in which they are effected is still more so, and our front page illustration gives a peep behind the scenes and explains the means by which the illusion is produced.

The trees and foreground are set in front of a transparent prospect upon the back of which the opaque parts are silhouetted in black, leaving the sky and water translucent.

Two optical lanterns, one of which carries the crescent and the other the corona slide, are mounted upon a box movable along the inclined side of a triangular frame by a drum and cord, and are thus enabled to imitate the appearance and course of the heavenly bodies. The screen immediately below the horizon intercepts the image of the luminary below that line.

The waves that play upon the surface of the lake are produced by a slide in a third lantern. This slide consists of clockwork, governed by a set screw, and actuating three eccentrically mounted rods moving in parallel planes and supporting glass screens upon which waves are painted. The interference of these waves permits ribbons of light of constantly varying position and width to fall upon the screen and give the effect of water ruffled by a breeze.

The play of natural variations in color and intensity of light produced by the revolution of the earth and its passage through the penumbra and umbra of the moon's shadow, and the development of full sunlight, are perfectly co-ordinated with the changing conditions of their source, the sun. This part of the illusion is effected by the management of the foot and border lights. These lights are red, white, and blue incandescent electric lamps arranged in series and controlled by a regulator permitting every possible variation, combination, gradation, and intensity of tint, and to its intelligent manipulation much of the success of the scene is due.

Our interest in this mysterious darkener of the sun is now gratified by a view from the distance of five thousand miles, showing the lunar mountains and other prominent features.

The plaster image of the moon viewed through a circular piece of gauze set in a black drop curtain is three meters in diameter. The changes of phase are produced by the light thrown from the lanterns as shown in the illustration.

The vicinage of Mounts Aristarchus and Herodotus and a view of Cape Laplace are shown from a height of two and one-half miles. These splendid scenes are a triumph of science and scenic art.

By trigonometric mensuration of the shadows and application of their values by perspective, the artist is enabled to represent the general features of the landscape with fidelity. These scenes are lighted from behind by four arc lights and a bench and foot lights, having a combined illuminating power of 8,500 candles; and well bring out the contrasts of earthly landscapes, softened and harmonized by the presence of air and life, with those of the moon, which, under a sky of eternal blackness, glitter in a jeweled panoply of death, for the moon is a dead world.

From the moon's surface the earth always seems to occupy the same place, and reflects to the moon a part of the light received from the sun. This earth light is observed when the new moon is first seen, and also when the old moon disappears.

The phenomena of earth light and sunrise on the moon is given by transparent earth painted in the sky and lit up by a lantern. The mountains on either side have a lantern each, whose light is permitted to fall on the drop by gradually lowering a screen.

A modified arc light illuminates the front of the scene and gives the earth light.

Probably the most unique of the cosmic phenomena unfolded is a solar eclipse viewed from the moon.

The earth is an opaque disk, with a red gelatine band attached to its circumference with white muslin, and suspended from two hooks set in a shelf extending across its back. A coat of phosphorescent paint gives the glow. The sun consists of a box with a cover of isinglass, on which the sun is painted. Semicircular wooden arms inclose a reflector, and support six incandescent lamps, set radially inward.

The box hooks into a piece of leather with a circular aperture coincident with the sun's face and sewed into the drop. Holes in the drop allow the light from an arc light to imitate stars.

The surface of the moon is painted on canvas supported on hinged props having spread feet; a stiff rod joins the hinges and forms the horizon. A footlight is placed within this tent-like cover to illumine it.

The drop curtain carrying the sun box is raised by a windlass, and as the sun rises accompanied by the stellar host, the footlight is turned up. In passing behind the earth the sun imparts a crimson hue to the earth's atmosphere, which the footlight transfers to the moon until the extinction of the solar disk. The return to earth is marked by a view of that part of the earth's surface most resembling the moon's, the Tyrolean Highlands. The after glow of sunset, moonrise and a lunar eclipse are depicted with great accuracy.

The gradual movement of a deep red gelatine film across the lantern slide holder causes the moon to appear to enter and emerge from the earth's shadow.

A sunset in the Indian Ocean and moonrise on the first scene conclude the lecture. A series of stereopticon views of great beauty are interspersed between the mounted scenes, and thus a continuous and most interesting entertainment is provided.

The scenery and ingenious mechanical effects are designed by Mr. W. Kranz. The regulator is the invention of Mr. J. Carl Mayrhofer, the electrician of the theater. The stage plugs used for electrical connections enable that part of the work to be effected instantly. The work of this scientific theater is not to be confined to astronomy alone, but is intended to embrace those sciences that can be attractively illustrated.

Caviar.

Caviar, which is made from the eggs of the sturgeon, is an important article of exportation for many cities of Russia and Astrakhan, and principally Taganrok. The annual amount is estimated at 40,000 pouds (1 poud=35 pounds). The greater part goes to Turkey, Greece, Italy, and Germany, very little to England, and still less to France. The fisheries are situated at the mouth of the Volga, upon the banks of which stand vast storehouses with basement and cellars in which are found the tubs that contain the brine used in the preparation of caviar. The most profitable fishing is done in autumn, this season yielding the largest quantity of eggs. In winter, the fishermen make large holes in the ice and fish with the spear. At all other times they use nets, about 300 feet in length, to which are attached cords provided with hooks. Each of these is strong enough to hold a fish of large dimensions. Each establishment owns a fleet of boats. The fishes brought on board are laid upon boards and covered with salt, and are then opened for the purpose of extracting the eggs and the entrails, which the Russians are very fond of, and which they eat in a fresh state. For exportation, caviar is prepared in two different ways: 1. The eggs are washed and then immersed in strong brine for three quarters of an hour and finally allowed to drain. In this way "granular" caviar is obtained. 2. For "compact" caviar, the eggs are first cleansed, then pickled and finally allowed to dry slowly. Then they are packed closely in canvas bags which are inclosed in wooden barrels, after which they are ready for shipment. A ruder process, but one much used in the trade, consists in immersing the eggs, immediately after collection, in brine, wherein they are left for several months, after which they are dried in the sun.—*La Nature.*

A Tar Asphalt Lacquer for Iron

is composed of 30 parts of West Indian copal, 30 parts of American pine resin, 30 parts of mineral asphalt, 30 parts of tar asphalt, 5 parts of yellow wax, and 6 parts of Venetian turpentine. These ingredients are melted and uniformly mixed by stirring. If the mixing is properly done the melted compound runs off the spatula in a cohesive, uniform, thick stream. The following are then added to the substance while it is still moderately warm: Twelve parts of resin oil, 30 parts of linseed oil varnish, 30 parts of turpentine oil, and, finally, from 30 to 45 parts of benzine. If it be desired to make the lacquer thin fluid, the quantity of benzine is increased. Painting must be several times renewed, the more often the finer the appearance.

FLANGED pulleys destroy many good belts. A properly rounded pulley will retain the belt on the center. A belt ought only to have contact with the pulley face.

Correspondence.

Detecting a Mirage.

To the Editor of the Scientific American:

In answer to "R. M." (4171), who inquires about means of detecting a mirage, will say: If the mirage be near the horizon, as was the case in each instance observed by the writer in Southern California, the deception may easily be eliminated from the real by bending close to the ground and taking a view, then suddenly rising to the full height, keeping the eye on the scene in meantime. Then reverse the plan. Before bending very low, the false view suddenly "shuts out," or disappears as by a screen, while the real scene only disappears as terrestrial objects hide it. In certain instances it is well to add to the upright view by a jump if no object can be utilized. This experience adds to the novelty of a mirage, and is wholly convincing.

JOHN S. PALMER.

Litchfield, Ct., March 26, 1892.

Occupation for Old People.

To the Editor of the Scientific American:

I have been much interested in the discussion in relation to the suitable occupation for aged and feeble people, and in the many good suggestions offered I have not seen a word regarding one of the most interesting occupations that an old or retired person can devote himself to, and that is the breeding of poultry. There is nothing more suitable to one with feeble health than the care of a growing flock of poultry, whether it be of common barnyard stock or the purest of pure bloods. There is especially in regard to the latter a fascination that has enraptured many a tired-out business and professional man, and the old men will find in it an ever-changing, an always-interesting, and many times a puzzling topic of study. And there is an incentive of profit that should not be overlooked. How to feed to get the best supply of fresh eggs, the proper course to follow in setting the old hen, the impatient longing to see how many chicks she will bring off, the pleasure of "counting the chickens before they are hatched," and then to watch the growth and development of the future prize winners—all of these serve to stimulate and keep up the interest of many an old man who is weary with nothing to do. Then there is plenty of opportunity for him to exercise his ingenuity in building houses, fitting up his yards, and the thousand and one things necessary to the proper care of fine fowls, that he need not complain for lack of occupation. Let the old man invest in a pen of Brahmas or Plymouth Rocks; my word for it he will take a new lease of life. And when he partakes of an egg laid on his own premises, or masticates the juicy flesh of a home-grown broiler, it will be with a keener relish and a sense of satisfaction that can only be realized by those who have earned their appetites by their own exertions.

W. H. HAMILTON.

Danielsonville, Conn., March 28.

Aluminum as a Coin.

Sir Henry Bessemer points out the insecurity and inconvenience of the proposed £1 note, and suggests the introduction of a coin which shall represent a value of £1, and be redeemable on presentation. He says: The issue of a coin which shall represent a value of £1, and be redeemable on presentation, would, it seems to me, be in itself as acceptable a security as a promise to pay printed on paper; while the convenience of handling in the daily course of trade, its safety from injury or destruction in the pocket, or from accidents by fire or water, and its immunity from the accretion of dirt and the consequent indistinctness of the paper note, are greatly in favor of the coin. The first impression produced on the minds of many persons by this proposal will naturally be the door which it apparently opens to fraud by the casting of such coins in plaster of Paris moulds and the coating of them by the electrotype process, just as base silver coins are now made. Some ten years ago such fears would have been well founded, but the science of metallurgy has given us a new metal which effectually bars the way to this mode of forgery, while its distinctive character is so clearly defined that a child could tell, even in the dark, a genuine coin from a spurious one. The new metal—aluminum—may be slightly alloyed, so as to harden and increase its durability, and at the same time raise its fusing point, and thus render the casting of it in plaster moulds quite impossible. The specific gravity of aluminum is 2·56, while that of silver is 10·47, so that an aluminum coin of the exact size and thickness of a common florin would weigh a minute fraction less than a silver sixpence; hence, as I before observed, if taken from the pocket in the dark it would be instantly recognized by its extreme lightness, and could never be mistaken for any coin made of gold or silver, while the great weight of all lead or pewter alloys, which are capable of being cast in plaster moulds, would not admit of their being passed off as aluminum coins, however their external surface might be coated or colored in imitation of that metal.

INAUDI, THE CALCULATOR.

A few years ago we spoke in these pages of a twelve-year-old child who had been presented to the Society of Anthropology as a prodigy of a new kind, and who performed the longest and most complicated calculations in his head. The name of this child was Jacques Inaudi. After going the rounds of country cafes, where he succeeded in earning his living by amusing the curious with his extraordinary calculations, Inaudi, who is now twenty-four years of age, has put himself under the direction of a manager, who gives public exhibitions of him in one of the concert halls of Paris. The faculties of this young man are extraordinary, and it has appeared to us that his history merits a detailed study. We shall have recourse in great part to a very complete work upon the calculator that has just been published by Dr. Marcel Baudoin.

Inaudi was born on the 13th of October, 1867, at Onorato, in Piedmont. In the country of his nativity, he, like Henri Mondeux, another celebrated calculator, began by guarding sheep. He soon followed his father, who played the organ in the various cities of the south of France, and it was by instinct, and without any one having taught him anything, that the faculty of making mental calculations came to him.

He began to exhibit himself in a cafe at Marseilles. His reputation soon increased, and in 1880 he came to Paris. He was then twelve and a half years of age. He was submitted to examination by Broca in the session of the Society of Anthropology of the 4th of March. After this epoch he made the tour of the country, as we have said, and it was but a short time since that he returned to Paris. He was presented to the Academy of Sciences at the session of the 8th of February, 1892.

Dr. Marcel Baudoin, who has submitted Inaudi to a special examination, describes the latter's astonishing operations in the following words:

We must now make known what extraordinary feats Inaudi is capable of performing. Standing upon the stage near the prompter's box, he turns his back to the blackboards placed in the rear of the stage, and upon which the manager writes the known quantities of the problems given, in order to permit the audience to take account of the calculations effected. With his hands crossed upon his chest, he listens with extreme attention to the question addressed to him, repeats it, and has it repeated, if necessary, until he understands it perfectly. He furnishes a correct solution almost immediately, without ceasing to look straight into the faces of the spectators, without writing anything (he never writes in calculating), and without being disturbed, whatever noise be made. Do you wish an example? He adds in a few seconds seven numbers of from eight to ten figures, and all this mentally, through means peculiar to him. He subtracts two numbers of twenty-one figures in a few minutes, and as quickly finds the square root or the cubic root of a number of from eight to twelve figures, if such number is a perfect square. It takes him a little more time when in this extraction of square or cubic roots there is a remainder. He finds, too, with incredible celerity, the sixth or seventh root of a number of several figures. He performs an example in division or multiplication in less time than it takes to state it. What is still more astonishing, an hour after performing all these mental operations, and after finding a solution of problems that are very difficult to solve by arithmetic, he recalls, with most remarkable precision, all the figures that he has had to operate upon.

Our figure represents Inaudi at the moment of his experiments. While the calculators standing behind him are performing upon the blackboards the examples given by the spectators, Inaudi, without ever looking at the boards, talks with the spectators and immediately solves other small problems. Some one asks him, for example, "On what day did the 11th of January, 1787, fall?" He answers at once: "On Thursday." And the answer is correct, as is verified by the spectator who asked the question and who has brought an old almanac with him. At moments, Inaudi stops his conversation, and, with his arms folded, he is observed to reckon upon one of his arms with his fingers, as shown in our engraving. He then asks for a few minutes of silence, in order that he may verify the calculation that he made amid the noise and while he was talking. Errors on his part are not frequent, as Dr. Baudoin remarks.

He is rarely deceived, and when he states a result it has many chances of being accurate. If he is deceived, he quickly recognizes his error, for he says that he always proves the operations that he has had to perform.

Broca, in 1880, was unable to get an insight into his processes of multiplication, and this he confessed without any circumlocution. Now that Inaudi possesses a well developed intelligence, he explains them without trouble. While we begin to reckon from right to left in multiplication, he proceeds, on the contrary, from left to right.

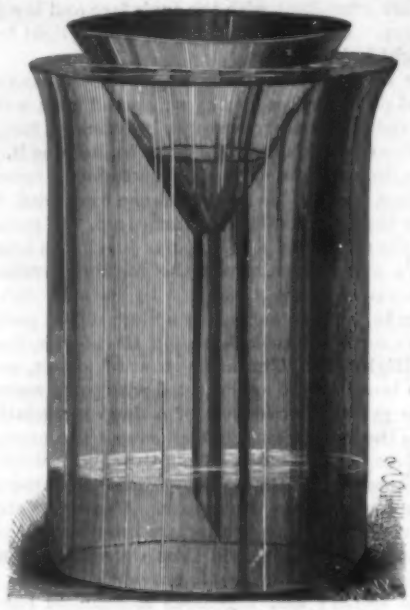

A HYDROSTATIC PARADOX.

Say we have to multiply 345 by 527. The series of operations performed by Inaudi is as follows:

1.	300 × 500 =	150,000
2.	300 × 27 =	8,100
3.	527 × 40 =	21,080
4.	527 × 5 =	2,635
	Total,	181,815

Altogether, four multiplications and one addition. All this is done in a few seconds; much more rapidly than if a skilled mathematician had taken the pen. But Inaudi is not merely a calculating machine, for he is also capable of doing the work of a true mathematician and of finding by arithmetic and tentative methods the solution of problems that are usually solved only by algebra. The manager insists upon this point, and he is right, and he adds that it has been thus only for the last two years. From this point of view, Inaudi has solved in our presence quite complex problems, which, worked out in this way, necessitated more than sixty successive operations that seem to pass before his eyes with amazing rapidity, like the figures of a kaleidoscope incessantly in motion. The difficulties that he has recently surmounted in this sort of exercises at the Academy of Sciences before the eyes of Messrs. Darboux, Bertrand, and Poincaré, at the Sorbonne, and at the minister's office in the presence of the minister of public instruction, Mr. Bourgeois, are truly colossal. The strongest mathematicians of our time, even Mr. Poincaré, whose competency in such matters is well known, have been obliged to recognize the fact. Let us add, further, that he is capable of retaining figures for months, provided that it is profitable to do so, or that he wishes to for any reason whatever. Then he classifies them in a special manner. It takes him a minute to commit to memory a number of twenty-four figures. Inaudi has had several predecessors, and it is not the first time that the members of the Academy of Sciences have studied analogous prodigies. As long ago as 1840, Henri Mondeux, a young calculator, was presented to them. Like Inaudi, he was a young shepherd. Born in the neighborhood of Tours, of poor parents, Mondeux from his earliest childhood had amused himself in counting pebbles while guarding sheep. He combined with them the numbers that he represented in this way, but he was unacquainted with figures. After having for a long time practiced alone in the fields, he offered to those whom he met to solve various problems. Mr. Jacoby, a teacher, remarked him and had him instructed, and a short time afterward took him to Paris and presented him to the Academy of Sciences. The mathematician Cauchy made a report upon him, in which he expressed his admiration to the highest degree. Mondeux was exhibited to the public in his shepherd's costume. He wore a blue blouse, a soft hat, and wooden shoes. A little before this the Academy had examined a twelve-year-old child, Vito Mangiamel, who was born in Sicily. Arago proposed some difficult problems to this child, who solved them mentally with the greatest ease.

"Lightning" calculators may claim as their ancestor the Englishman, J. Buxton, who toward the middle of the last century enjoyed a great celebrity. He, too, was an illiterate person, who began his reputation in his childhood. He calculated the longest and most complicated interest accounts.

Prof. Charcot, who submitted Inaudi to a close examination, was struck with the almost absolute identity of the conditions of birth and precocious development exhibited by "lightning" calculators. Almost all of them have drawn their extraordinary aptitudes from themselves, and have been illiterate. There is here a natural gift, as is, in a way, that wonderful gift that we call genius, and which inspires great artists or great mathematicians.—*La Nature.*

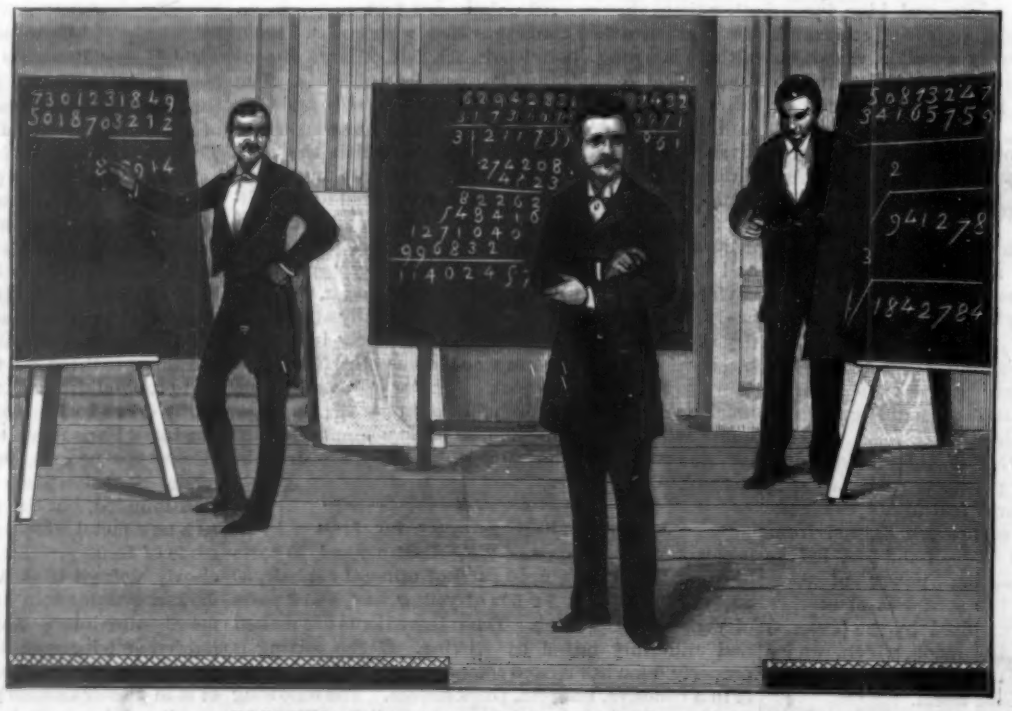

JACQUES INAUDI, THE RAPID CALCULATOR.

A HYDROSTATIC PARADOX.

R. W. WOOD.

A very pretty and instructive experiment, which I have never seen described, consists in floating a vessel with a hole in the bottom in a fluid specificially lighter than the material of the vessel.

An ordinary glass funnel, open at both ends, is made to swim in what appears to be pure water.

The effect is very startling, and even after the conditions are told, the exact cause may not appear to every one. To perform the experiment, fill a beaker six inches high to within an inch of the top with pure water. By means of the funnel, which should be of the same height as the beaker, pour ordinary sulphuric acid (the c. p. is better, being clearer) into the beaker until the water reaches the rim. The funnel should reach to the bottom while the acid is being poured in, and the heavy fluid will remain in a layer underneath the water. The surface of the acid should be stirred a little, so as to cause a partial mixing and render the dividing line more obscure. Then remove the funnel. By placing the glass in a suitable light, it will be next to impossible for a person to see the dense layer at the bottom. Call attention to the fact that there is nothing in the neck of the funnel to prevent the entrance of the water, and lower it into the beaker, where it will float in a most curious manner, and if pressed down a little, will bob up like a cork. The reason is obvious. As the funnel is lowered into the glass, the water rises in the tube and the level remains constant inside and outside, but as soon as the stem of the funnel dips into the heavy acid a change of level commences, for the downward pressure of the water outside will not support a column of acid its own height, and consequently the level of the liquid within the funnel falls below the

level of the liquid outside. This difference of level has practically the same effect that a plug in the bottom of the stem would have; the head of the funnel being nearly full of air, it floats just as any hollow glass vessel would. In a beaker filled with sulphuric acid alone the funnel would sink, the glass being heavier than the acid.

The experiment is a very pretty one for the lecture table, and the exact cause of the phenomenon will prove rather a severe test for an elementary class.

A tubulated champagne glass, with the bottom cut off, may be used instead of the funnel, and I think likely that a saturated solution of hyposulphite of sodium could be used instead of the acid. It certainly would be safer.

If, while the funnel be floating, one pours sulphuric acid into it slowly, it does not sink, but *rises higher out of the water*, for the acid expels the water that entered during immersion, from the stem, and consequently decreases the length of the column necessary to support the funnel. If, on the other hand, water be poured into the funnel, it will sink at once, for the water cannot get down past the heavy acid in the bottom of the stem, and consequently fills up the head.

Baltimore, Md., March 14, 1892.

ROPE TRACTION FOR CABLE RAILROAD PLANTS.

The great rope drive wheel shown in the accompanying illustration is one of four of the same size made by the Walker Manufacturing Co., of Cleveland, Ohio, for the Third Avenue Cable Railroad. These wheels are each 32 feet in diameter, 6 feet 1 inch wide on the face, and provided with 22 grooves each suitable for a 2¼ inch cotton or hemp rope. The finished weight of each wheel is 75 tons.

The connecting flanges of the segments of the rim are placed in line with the arms, and turned bolts fitted into reamed holes serve to secure these segments together. The arm ends are secured to the flanges on the segmental rim by through bolts, a portion of which are turned, fitted into reamed holes.

The centers, which present a very massive appearance, are accurately faced to receive the flanges of the arms, the connection being made by through bolts, half of which are turned bolts fitted into reamed holes. The wheel is shown in the lathe in which it was held for the making of the grooves in its face, the wheel being turned by a supplemental wheel clamped to its hub, while the supplemental wheel was turned by bevel gear connections. Other wheels of various sizes, ranging in diameter from 9 feet up to 22 feet, are being made by the company for the same work. The down town power house of the Third Avenue Cable road will be at the corner of the Bowery and Bayard Street, and at each of the power stations the entire plant will be duplicated to prevent any possible delay from breakdowns.

The Walker Manufacturing Company are also now making some similar rope wheels for the Broadway Railway Company, but these wheels will be still larger, being 33 feet in diameter and 8 feet 4 inches wide over the face, weighing over 100 tons each. The accompanying diagram of the Houston Street power station of the Broadway road, work on the foundations for which is now progressing, shows how these rope traction wheels are employed. The power plant is to be on one floor, all beneath the street level, and it has been necessary to excavate to a depth of 40 feet to obtain the room which will be required for the machinery. There are to be four engines of 1,000 horse power each, arranged in pairs. Each pair of engines, F, operates a shaft on which is a rope traction wheel, A, but a clutch mechanism allows either of the engines to be disconnected. A series of ropes transmits the power from A to the similar wheel, B, on a transverse shaft, this shaft also being similarly connected with the other pair of engines, and the arrangement being such that either one of the four engines may be employed to operate the shaft.

The smaller rope traction wheels, C, on the transverse shaft, are connected by a similar series of ropes with the large wheels, D, on shafts carrying the cable drums, E, on their outer ends. This means of conveying power from the engines to the cable drum shafts is not as rigid as would be a system of gears, and runs with far less friction, while some decided advantages are claimed for it over belt traction. The portion of the cable coming in is always under a higher tension than the portion of the cable which is going out, and this arrangement of rope-driving wheels is designed to give a certain elasticity to the system which will better accommodate the differences of tension than would be accomplished with either leather belt or cog wheel power transmission. There will be two entirely separate cables laid, the cars being provided with duplex grips, by means of which a change can be quickly made from one cable to another, should any accident occur by which the running cable is disabled.

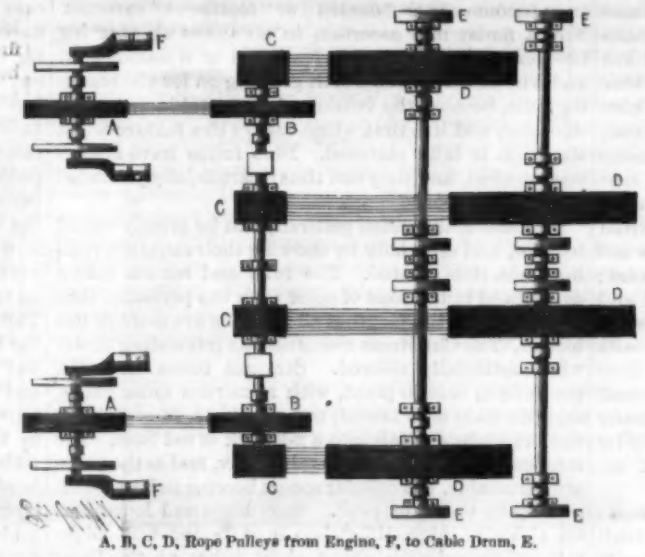

A, B, C, D, Rope Pulleys from Engine, F, to Cable Drum, E.

POWER TRANSMISSION BY ROPE PULLEYS TO CABLE DRUMS.

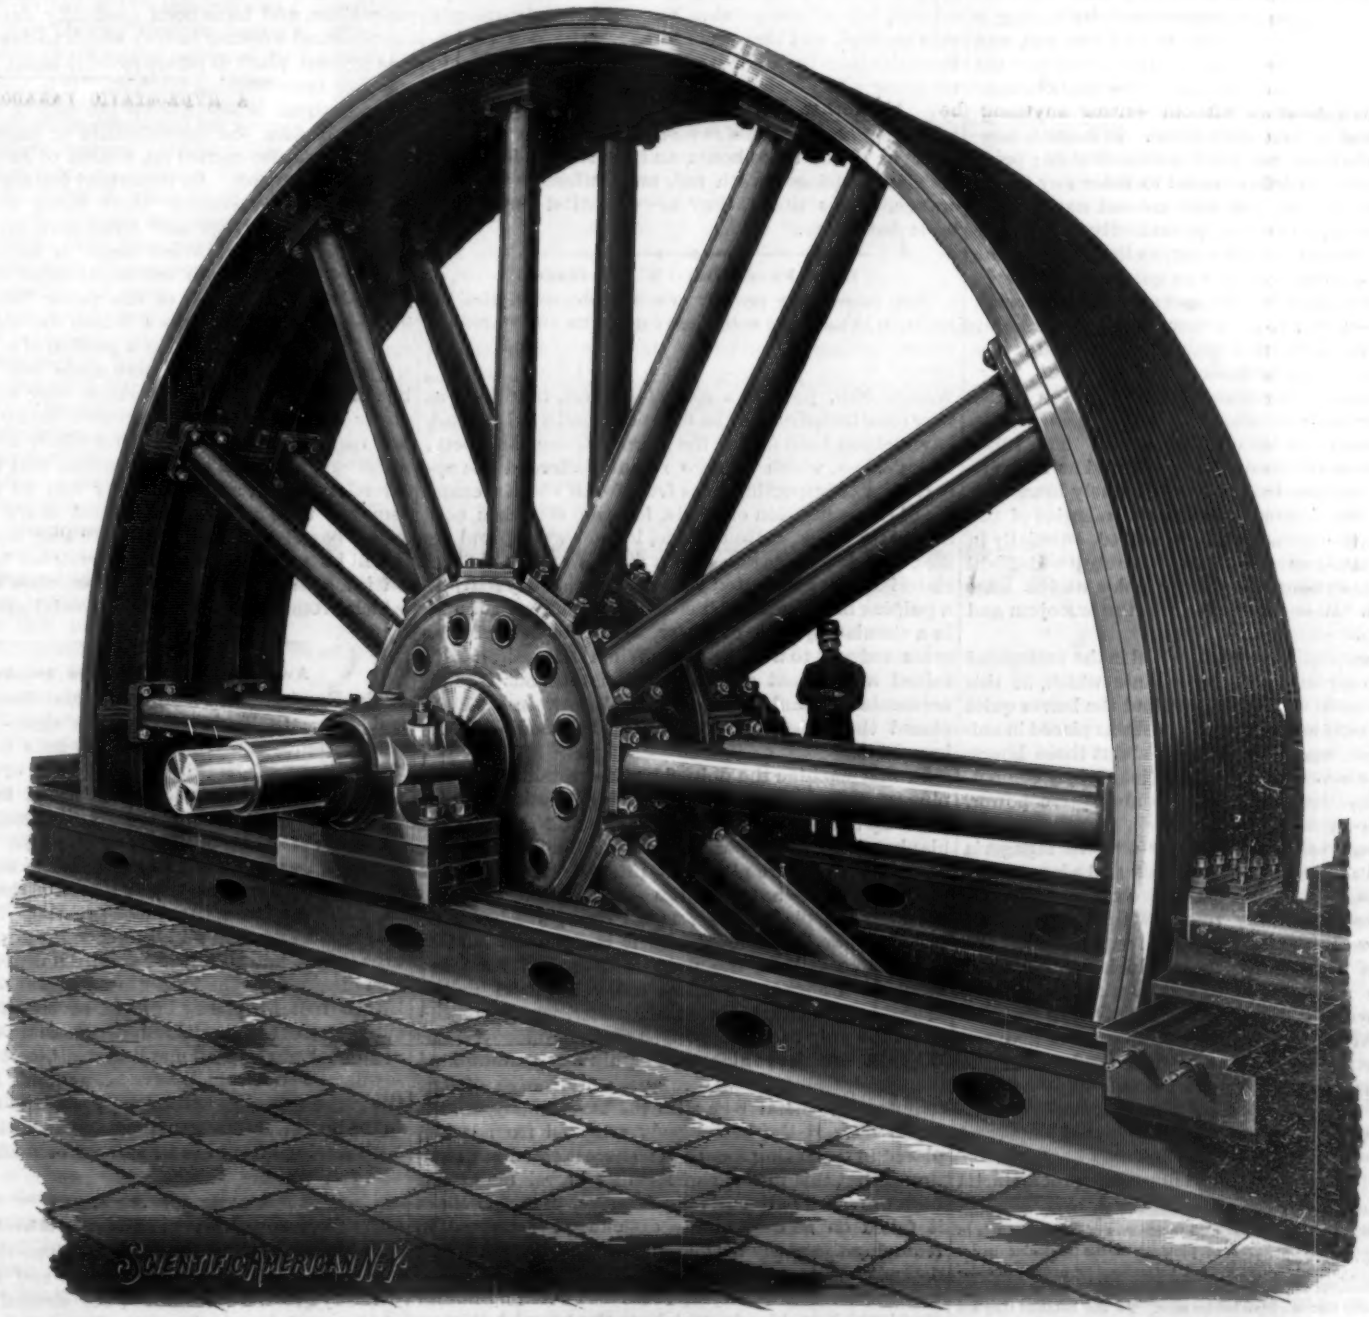

A GREAT ROPE TRACTION WHEEL FOR THE THIRD AVENUE CABLE RAILROAD.

The Artificial Coloration of Flowers.*

The excitement about blue carnations led my neighbor, Mr. W. Dorrington, and myself to endeavor to solve the mystery by imitating it, and we soon discovered that, although flowers could not be tinted by immersing them in dye solutions, they could readily be colored by placing their stalks in aniline solutions.

Aniline scarlet dissolved in water to about the transparency of claret has a very rapid action on flowers, coloring them pink and scarlet. Indigo carmine produces beautiful blue tints. The two combined dye various shades of purple, with curious mottled effects, some parts of the flowers becoming pink and other parts blue and purple. Greens are produced by using the blue dye with yellow. We also tried indigo and cochineal, with partial success. Lily of the valley flowers became beautifully tinged with pink or blue in six hours; narcissi are changed from pure white to deep scarlet in twelve hours, and delicate shades of pink are imparted to them in a very short time. Yellow daffodils are beautifully striped with dark scarlet in twelve hours; the edges of the corona also become deeply tinged, and the veining of the perianth becomes very strongly marked. Cœlogyne cristata, lapageria alba, calla æthiopica, cyclamens, snowdrops, leucojums, hyacinths, Christmas roses, Solomon's seal, tulips, and many other flowers were successfully treated, and many leaves were found to become colored very quickly by the process. I send you herewith a number of examples.

The more interesting question of how this rapid change is brought about soon attracted my attention, and proved extremely interesting. The coloration is mainly confined to the vessels.

There is a system of veins in plants, the vein tubes being clearly seen under the microscope passing through the leaves, petals, and other parts of the flower. In these tubes the motion of the colored water can be seen, and it became evident that it was by these that the color is conveyed and left in every portion of the plants. In the case of cut flowers, the action is very rapid, the water tubes beginning at once to absorb the fluid, which was passed along by either capillary attraction, contraction, or possibly by some more active life-force acting within the veins. My experiments in proof of this were made at first entirely with cut flowers. I afterward tried the experiment by taking a Roman hyacinth very carefully out of the soil, and placing the roots in aniline water. In twelve hours the petals began to color, and the flowers gradually became pink tinted throughout. This experiment was repeated on many narcissi and other bulbs. It cannot, however, be said that the root fibers were unbroken; probably they were so, as I have failed to color any flower by merely watering the soil with colored water. The filtering appendages to the roots evidently prevent the absorption of much of the color, as the petals of the flowers do not become either so quickly or so deeply tinted when the plant has its root as with cut flowers. It was, however, clearly seen that the vein tubes proceeded from the roots, thus completing the water system of tubes from root to flower.

The veins when colored are beautifully seen under the microscope as clear tubes running in parallel lines, the interspaces filled by cellular matter. The tubes gradually branch out as they proceed, and as they approach the margins they are often finely branched. When the colored water reaches the margins of the petals they thus become deeply tinctured, especially in the narcissi, illustrating the cause whereby the daffodil so frequently obtains the deeper color at the edge of the corona. It is the same with the leucojum and the snowdrop.

Very singular results were obtained in the variegated leaves of the aucuba and ivy—plants which, at this winter season, one would suppose, had the leaves quite dormant. Single leaves, with their stalks placed in aniline dye water, began to color in about three hours, and in twelve hours had their margins deeply colored. They were thus shown to have the absorptive power, quite apart from the stem.

Another remarkable instance was seen in lapageria alba, which has a very thin wiry stalk and a large waxy flower. With the stalk placed in dye water, the whole flower became beautifully veined with pink in three or four hours—a singular fact, when one considers the minuteness of the tubes through which the liquid has to be drawn. It is difficult to believe that this can be accomplished by capillary attraction only. In eucharis amazonica, which has thick stalks, the flower does not become tinted at all, but the style is dyed a deep red. The pistils of flowers always become deeply colored, which is an important fact, showing that the solid matter of the coloring solution is thus secreted [deposited in] by the fruiting vessels of the flower.

White tulips furnish excellent illustrations of artificial coloring, as they can be readily tinted either pink, blue, green, or purple in a few hours. The vein tubes which are thus displayed in the petals agree with the strongly marked features, known as the "flamed" or "feathered" varieties of the florist. It is generally known that all tulips raised from seed are self-colored when they first bloom; they are then called "breeder tulips," and the enthusiastic amateur florist grows on his "breeders" for six or seven years until they "break," when they become either "flamed" or "feathered" varieties. Now a florist may ascertain in six hours whether his breeder tulip will become a feathered or a flamed sort, and whether it will be worth growing on for the breaking time, because the veining of the petal is shown by the color, and it is that which makes the feature when the tulip is fully matured. Blue tulips have always been desired, and they can thus be artificially produced for florist purposes.

Daffodils and narcissi generally can be greatly varied in color, and especially by showing their exquisite veining when thus treated. The tube and corona take a darker and richer tone of color than the perianth, thus agreeing with the fact that all daffodils are more or less bicolor. The Christmas rose is also an interesting flower when artificially colored. Straight tubes cross the petals from base to point, with numerous cross tubes, and the main ones branch out angularly, thus dividing the snow-white petals into a network of red lines. The interspaces are filled with oval cellules, and as the tubes are permeable, the cellular spaces become suffused with a delicate shade of pink. Snowdrops and leucojums are also very interesting when thus treated. Their petals are veined with about eight tubes at the base, which pass across the petal to its point in nearly parallel lines, strongly and clearly marked. These are branched near the tip of the petal in fan-like form, producing rich pink margins to the flower. The double white camellia is another very pretty illustration, as it easily assumes a pink shade throughout. It is difficult to imagine how this is done, as the camellia has a small woody stalk; and in the case of a double flower, with forty or fifty petals, the attachment of each of them to the tubes in the stalk must be very slight, and yet every petal becomes tinted in a few hours.

White lilac takes the color perfectly, becoming either pink or blue at pleasure. The abutilon has the calyx colored, but not the petals. These are already strongly vein marked, and they seem to refuse the new comer. Primulas take the color readily, but the common wild primrose will not be changed. Forced leaves of the Swede turnip, grown in the dark for culinary purposes, are extremely susceptible to coloration. They begin to color in about three hours, and in twelve hours are beautifully fringed with red, and suffused with rich orange. Thus tinted, they are beautiful objects for table decoration.

* Wm. Brockbank in the *Gardeners' Chronicle* of March 12. The editor adds: "Botanists have long since availed themselves of colored liquids to ascertain the course of the juices of plants, and the particular tissues through which the current passes, but our correspondent gives some details of much interest at the present time, and the specimens he sends exceed in interest any that we have before seen. To the botanist they are of special value, as showing so clearly the course of the vessels. The value to the florist is also curiously illustrated in the case of the tulip."

How Paper Barrels are Made.

This interesting process, which is the invention of Mr. J. R. Thame, is being carried out by the Universal Barrel Company, London, at their works at Boxmoor, Herts. These premises, which are known as Two Waters Mill, possess a special interest, inasmuch as they constituted one of the first paper mills in England, having been built during the reign of Queen Elizabeth. The process, which we were recently afforded the opportunity of inspecting, says *Iron*, forms another example of the utilization of waste, for the materials used are waste paper, cotton waste, leather waste, and, in fact, any waste substances of a fibrous nature. These materials are first sorted and are then slowly fed into a pulping machine, which consists of a beater running in a circulating tank of water, the waste being by degrees reduced to a fine pulp. When the pulp has attained a sufficient consistency it is run out into an accumulating tank on the floor below, in which is placed the apparatus for forming the bodies of the barrels.

In this machine the pulp flows into a tank and impinges against an endless traveling blanket, which picks up the pulp, the water draining off through the blanket. On the upper side of the blanket, and in contact with it, are placed, at intervals, the cylinders upon which the barrel bodies are formed. On these cylinders are placed sheet metal cores, which can be expanded and contracted, and it is upon the surface of these cores that the pulp is deposited from the blanket. Under the blanket, and in a line with each of these cylinders, is a pressure roller, which consolidates the pulp as it is deposited on the upper cylinder. When a sufficient thickness of pulp has accumulated on the cylinder, which occupies an average of four minutes, the metal core with the barrel body on it is taken off and the barrel body removed from it and placed in the drying room. And here it should be mentioned that this method of forming barrel bodies has been previously attempted in America. But we believe it failed on account of the difficulty experienced in removing the newly formed body from the core. This difficulty is overcome by Mr. Thame's ingenious contracting core. The drying room is heated by hot air circulated by a blower, and here the barrel bodies remain for a day, at the end of which time they are perfectly dry, and are taken to the trimming department, where the ends are trued up by saws, and afterward finished by hand, with sand paper. The bodies are then waterproofed by dipping them in a heated mixture of resin and resin oil. When dry the bodies are hooped up with a couple of American elm slips, and are ready for having the bottoms and heads fitted in and finishing.

The heads are made in two different ways. In one case they are formed from sheets of cardboard produced on a wood roller in the same way as the bodies, the paper cylinder being cut longitudinally and spread out into a sheet, which is dried, and out of which the heads and bottoms are subsequently stamped and finished off in the same way as the bodies. In the other case the heads and bottoms are formed from the pulp in a hydraulic press under a pressure of 750 lb. per square inch, and are finished in the same way as the others. In heading the casks a wood lining hoop is first fixed inside the body near the end, and the bottom is inserted and held in place by a second hoop on the top, the head being fixed up in the same way. The barrels are then painted ready for use. So far, the barrels we have been describing are plain cylinders, but bulged barrels of a superior class are also made, and for these the pressed heads are used. The bulged barrels are produced by placing the cylindrical body in an open-topped moulding press, the interior of which is of the necessary contour. Inside the body is placed an India rubber bag, connected up with the hydraulic main, and to which the water is admitted under the pressure before named. The pressure is kept on until the body has set to the desired form, when it is removed to the drying room to be dried and finished. All kinds of barrels are turned out, round as well as square, the latter being used for packing matches, but the barrels which were being made upon the occasion of our visit were plain cylindrical cement barrels, measuring 28 inches long by 16 inches diameter, and holding 3 cwt. of cement. The machinery is driven by an interesting example of steam engineering, namely, a compound beam engine of 30 horse power, bearing the date 1856. Steam is supplied by two Lancashire boilers, one of which is kept in reserve.

The works were started experimentally some four years since, and have been gradually developed into the practical working factory which to-day finds them. The present plant is comparatively small, there being only one body-forming machine. It is, however, equal to an output of 300 barrels per day of twenty-four hours. Besides the manufacture of barrels, that of cardboard is also carried on, boards of excellent quality being produced. An important feature of the manufacture is its economy, there being absolutely no waste. The cuttings and trimmings, and in fact all surplus material at every stage, is returned to the pulping machines. In one department we found an interesting application of the paper barrel to driving machinery. This was a 16 inch driving pulley, the rim of which was formed of a portion of a barrel body, while the arms and boss were made out of a pressed barrel head, the pulley working very well. For the paper barrels thus manufactured many advantages are reasonably claimed, among which are that they are strong, durable, and economical, that the parts are interchangeable, and that they can be made of any required tare, and to suit almost every purpose for which barrels are used. From all that we have stated it will be seen that in paper barrels we have not only an interesting process, but a practical manufacture which promises to prove a commercial success.

Ancient Cave Dwellers in Asia.

The Russians have made a singular discovery in Central Asia. In Turkestan, on the right bank of the Amou Daira, in a chain of rocky hills near the Bokharan town of Karki, are a number of large caves, which, upon examination, were found to lead to an underground city, built, apparently, long before the Christian era. According to the effigies, inscriptions, and designs upon the gold and silver money unearthed from among the ruins, the existence of the town dates back to some two centuries before the birth of Christ. The edifices contain all kinds of domestic utensils, pots, urns, vases, and so forth. The high degree of civilization attained by the inhabitants of the city is shown by the fact that they built in several stories, by the symmetry of the streets and squares, and by the beauty of the baked clay and metal utensils, and of the ornaments and coins which have been found. It is supposed that long centuries ago this city, so carefully concealed in the bowels of the earth, provided an entire population with a refuge from the incursions of nomadic savages and robbers.

To Clean Corundum Wheels.

Take one-third chloroform and two-thirds alcohol. The chloroform dissolves the wax and oil that accidentally gets on the stone; the alcohol removes the shellac and leaves the corundum free to cut as when the stone was new.—*Dr. Beacock, Dom. Dent. Jour.*

SERENO WATSON.

For the fourth time in the new year death has invaded the ranks of the National Academy of Sciences, taking Meigs, Lovering, Hunt, and now Watson.

Sereno Watson was born in East Windsor Hill, Conn., on December 1, 1826. Of his early life we have no record, but he must have shown evidences of studiousness, for he entered Yale College and was graduated in 1847, a member of the largest class ever graduated from that institution prior to 1863.

After graduating his mind seems to have turned to medicine, but the way was not clear, and so, for five years, he taught in various places in New England, in Pennsylvania, and in New York. Meanwhile at intervals he studied medicine, both at home in East Windsor and in the medical department of the University of the City of New York. Then for a time he served as a tutor in Iowa College, in Grinnell, Iowa, but this place he soon relinquished, and spent the years 1853-1855 in Quincy, Ill., where he completed his medical studies under the direction of his brother, Louis Watson.

He practiced medicine for a short time only, and in January, 1856, accepted the appointment of secretary of the Planters' Insurance Company, in Greensboro, Ala. This place he held until April, 1861. The civil war had then begun, and he retired from this office to return to the North. Subsequently he engaged in literary labors and for several years he was associated with Dr. Henry Barnard in editorial work on the *Journal of Education*, published in Hartford, Conn.

While in Alabama he became interested in botany, devoting his leisure to the pursuit of that interesting science, but it was not till later that he was able to return to it. In 1867 he went to California by way of the Isthmus of Panama. About this time the United States Geological Exploration of the 40th parallel was organized by Clarence King, under whom Dr. Watson received an appointment as a volunteer aid to the service. In March, 1868, William W. Bailey resigned the office of botanist to the exploration and Mr. King promptly nominated Dr. Watson to fill the vacancy.

He continued in the field until 1869, and then settled in New Haven, where he began the examination of the material collected in the herbarium of Professor Daniel C. Eaton, in Yale College, but a year later he removed to Cambridge and there completed his work in the herbarium of Professor Asa Gray. His results were published as Volume V., on "Botany," in the series of "Reports of the Geological Exploration of the 40th Parallel" (Washington, 1871). With the publication of this large quarto work his connection with the exploration came to an end.

His ability as a botanist was established, and much of the botanical work of the "Geographical and Geological Explorations and Surveys West of the 100th Meridian" was assigned to him by Professor Ferdinand V. Hayden. His results are scattered through the official reports of the survey and are known to his fellow scientists through his specially reprinted monographs. Again in 1880 the government sought his services and he was intrusted with the procuring of certain botanical information for the forest department of the United States census of that year. For this purpose he made a special visit to the great Northwest, in order to secure the necessary results.

Meanwhile he continued to make his home in Cambridge, and in 1874, when the work of Dr. Asa Gray was divided among his assistants, the special charge of the herbarium was given to Dr. Watson. As curator he continued until his death. During 1881-1884 he also served Harvard as instructor of phytography. Subsequent to the death of Professor Gray, in 1888, the active prosecution of the systematic work at the herbarium was carried on by Dr. Watson. He took up the editing of the unfinished "Synoptical Flora of North America," and in association with Professor John M. Coulter, of Wabash College, Crawfordsville, Ind., he prepared a revised edition of Dr. Asa Gray's "Manual of the Botany of the Northern United States."

Of his own special work, the "Bibliographical Index to North American Botany," Part 1, Polypetalæ, was published in 1878 by the Smithsonian Institution, and in association with Professor William H. Brewer, of New Haven, and Professor Asa Gray, he prepared the "Botany of California," in two octavo volumes, issued in Cambridge in 1876 and 1880, as part of the series published under the auspices of the Geological Survey of California. The revising and editing of the "Manual of the Mosses of North America," originally prepared by Leo Lesquereux and Thomas P. James, was intrusted to him, and the volume was published in Boston in 1880.

Under the general title of "Contributions to American Botany," he published the results of special studies in his favorite science. These appeared for the most part in the "Proceedings of the American Academy of Arts and Sciences," and perhaps the most important were those devoted to the plants collected by Dr. Edward Palmer in Southwestern Texas and Northern Mexico. Besides these, he published occasional papers in the *American Naturalist* and other scientific periodicals. For a time he was one of the assistant editors of the "Century Dictionary," having special charge of the botanical subjects.

The great value of his work was appreciated by his scientific associates. In 1878 Iowa College, where as a young man he had been an instructor, conferred upon him the honorary degree of doctor of philosophy, and in 1880 he was chosen to the National Academy of Sciences, taking the place made vacant by the death of his older colleague, Dr. Asa Gray. He was one of the resident fellows of the American Academy of Arts and Sciences and in 1873 he became a member of the American Association for the Advancement of Science, at the Portland meeting. Two years later he was advanced to the grade of fellow. Dr. Watson was also a member of other scientific bodies, both in this country and abroad.

At the meeting of the National Academy of Sciences, held in New York during November, he was present, and apparently in good health, but, toward the close of the year, he became a victim to the prevalent epidemic form of the influenza, from which he failed to recover. A complication with dilation of the heart ensued, and, on March 9, he died at his home in Cambridge. His funeral services were held a few days later in Appleton Chapel.

At the time of his death, Dr. Watson was the fifth oldest active officer of Harvard University, but his retiring disposition prevented his being known personally to but few. He was absorbed in his particular duties at the herbarium, and seldom met others than those who were interested in his work. His familiar figure will no longer be seen in the college yard, but his contributions to American botany form a monument to his memory that will last forever. M. B.

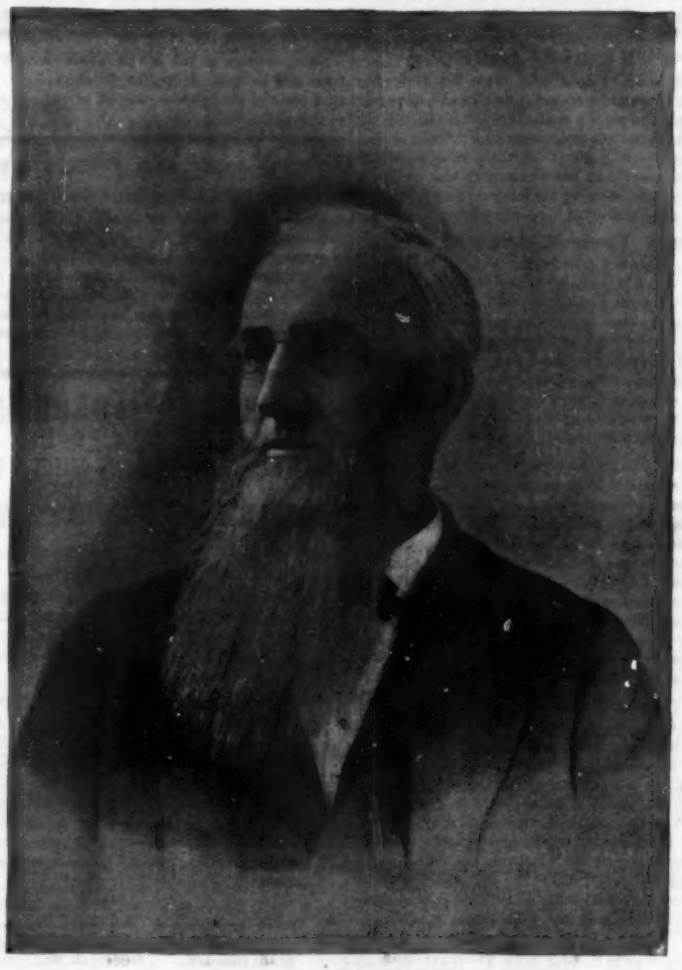

SERENO WATSON.

Chronic Arsenical Poisoning.

A good example of chronic arsenical poisoning on a large scale occurred in County Asylum, Berrywood, and a short account of it may be both interesting and instructive. In the endeavor to make the wards of an asylum bright and cheerful, and to do this at as little expense as possible, it is not improbable that the nature of the coloring materials used may be overlooked, and that some of the gastric and intestinal disorders which disturb the peace of mind of medical superintendents may be cases of arsenical poisoning. For a long period the nurses here were in poor health. First one and then another was laid down until, within a few months, nearly every nurse on the staff had been, or was, under medical treatment. Headache, neuralgias, gastric derangements, loss of appetite, constipation or diarrhœa, irritation of eyelids, anæmia—these were the chief symptoms complained of. Drugs did not appear of much avail, but a holiday had a marked effect for good. At last one nurse had the eye symptoms in a more pronounced form, and suspicion was aroused. In each nurse's room was a green baize curtain, used as a covering for dresses, etc. A portion was taken and examined. It was found to be impregnated with arsenic to an astonishing extent. These curtains were removed; the rooms freely ventilated; medical treatment was stopped; the symptoms disappeared, and, though some months have elapsed, have not returned. The baize was similar to that used for covering doors, etc., and was obtained from two manufacturers.—*W. Harding, M.B., in the Lancet.*

Plate Glass Manufacture in Belgium.

According to the latest published statistics (1888), there were in active operation in the kingdom of Belgium 64 factories and 153 furnaces manufacturing glass of all kinds, employing 17,240 workmen. The value of the yearly production was 35,765,000 francs.

In the consular district of Brussels there are eight plate glass manufactories, as follows: Societe Anonyme of Floreffe, at Floreffe; Societe Anonyme of Monstier, sur Sambre; Societe Anonyme of Anvelais, sur Sambre; Societe Anonyme of St. Roch, at Anvelais; Societe Anonyme of St. Marie d'Origines, at Tamines; Societe Anonyme of Hainaut, at Roux; Societe Anonyme of Charlerol, at Roux; Societe Anonyme of Courcelles, at Courcelles.

The average monthly production of each manufactory is 12,000 square meters. The average monthly production of the eight manufactories is 100,000 square meters, and per year 1,200,000 square meters, or 13,000,000 square feet, English measurement.

Crystal and mirror plate glass is not manufactured in this consular district, but is largely imported from Furth, Germany.

Ninety per cent of the crystal and mirror glass is made from blown window glass, which is first made into thick cylinders, which are smoothed and polished by machinery until the desired thickness is obtained, which varies from one-eighth to three-sixteenths of an inch.

The method employed in this district for grinding, smoothing, and polishing plate glass is as follows:

The glass, when taken from the furnace, is spread upon a cast iron table; the mass is then rolled into sheets of from 9 to 10 and from 14 to 16 millimeters in thickness. The former is designated as thin, and the latter as thick, plate glass. This operation constitutes what is known as rolling, and the glass thus produced is called rough glass. After the glass has been completely cooled, it is placed upon cast iron tables, upon which a bed of plaster of Paris has been prepared to receive and firmly hold the glass in place. Particular care is exercised in filling in the spaces between the glass and the table with the plaster, so as to securely seal the glass to the table. It then passes through a series of grinding and smoothing operations until the thickness is reduced to about one-fourth, and the face of the glass has been thoroughly polished. It is removed from the table, turned, replaced, and polished in the same manner as above described.

The operation of smoothing and polishing costs 6·50 francs ($1.25) per square meter. The cost of the rough glass is 7·50 francs ($1.45) per square meter. The total cost of glass when finished to a marketable condition is 14 francs ($2.70) per square meter (10¾ English feet).

JACKSON PARK will retain as one of its permanent attractions the building which Japan will erect for its headquarters at the Exposition. The building will be modeled after one of the most famous and architecturally unique of Japan's ancient temples, and with its surrounding garden will cost $70,000. About 40,000 square feet will be occupied. The South Park commissioners have accepted the offer of S. Tegima, representative of the Mikado, to give the structure to Chicago on condition that it be kept permanent and in repair, and that one room in it be devoted to a public exhibit of Japanese works of art, which the Japanese government agrees to replenish from time to time.

Sleeping Cars.

In one of the Pullman Company's suits for infringement, Mr. Jacob Shaffer testified that in 1837 he was employed in the car shops of the Cumberland Valley Railroad Company, and that sleeping cars, with hinged or folding beds, were then in use on that road. This defeats any broad claim to the use of such beds in cars.

RECENTLY PATENTED INVENTIONS.

Railway Appliances.

ELECTRIC SIGNAL. — Edgar C. Wiley, Bristol, Tenn. This invention provides an improvement on a former patented invention of the same inventor, being a circuit-closing device for use in connection with a system employing a rotary commutator. The invention consists of a peculiar construction and arrangement of devices whereby a depressible bar acted upon by the car wheel is made to adjust the commutator to position for making the circuits, hold it in this position for a limited time, and then allow it to be restored to its normal position.

ELEVATED RAILROAD.—Elbert D. Wilson, Birmingham, Ala. In the railroad construction contemplated by this patent the cars may be propelled by a power in the car or by hand. Brackets projecting from a line of posts support a cable on the top of which grooved wheels are mounted to travel, a frame carrying the wheels, while upon a downwardly extending rod is hung a car, there being a gear wheel on the shaft of one of the grooved wheels, a spring-pressed pawl engaging the gear wheels, a lever fulcrumed loosely on the shaft of the gear wheel carrying the pawl, and a bell crank lever fulcrumed in the car and connected with the pawl lever.

Mechanical Appliances.

SAW SET. — James M. Basket, Leota Landing, Miss. This is a self-acting device in which the hammer is first raised against the action of its operating spring by pressing the handles together, and then released by a further pressing together of the handles to act on the saw tooth, an improved gauge being provided by which the angle of the saw and its teeth may be readily adjusted. The implement may be moved rapidly along the saw from tooth to tooth and operated by a quick succession of grasps, the quick block given the tooth not bending it to any great extent, but beveling it on one side.

WINDMILL LUBRICATOR. — Benjamin J. Sykes, Sykesville, Pa. This device consists of a vertically swinging can or receptacle and a discharge tube extending up through the receptacle, and having a horizontal fixed extension at its lower end projecting in the direction that the receptacle is to be swung, so that when the receptacle is swung upward the contents of the horizontal extension will flow into and through the tube. At any moment all the journals or bearings may be lubricated by simply tilting upward the lubricating can.

CLAMP. — Walter H. Robinson, St. Paul, Minn. This clamp comprises two arms pivoted on the same base, and each provided on its free end with a fork and a screw rod for moving the arms toward and from each other. The device is simple, and is more especially designed to facilitate the removal of the spring and cap in air brake cylinders or other similar devices, to clean the same, and to assist in replacing the spring and cap after the cylinder is cleaned.

Agricultural.

CORN HARVESTER. — Peter J. Garber, Potwin, Kansas. This invention relates to a harvester in which the wagon frame is provided with a detachable hinged and obliquely arranged knife, the device being applicable to an ordinary farm wagon. The improvement also consists in a peculiar construction of the knife and the means for connecting it to the wagon frame, and also in a carrier or shocker for the cornstalks, to receive and transport them to the side of the field, the land being left ready for the plow.

TOBACCO HANGER. — Horace L. Freeman, Lexington, N. C. This is an improvement in hangers which consist of a portable supporting stick and a series of arms or needles pivoted thereto and adapted to swing, to fold against or swing outward from the stick. Each arm or needle has two adjacent eyes and is pivoted at each points to two parallel sticks or stick sections, which are movable relatively to each other to adjust or allow adjustment of the arms or needles, for opening them outward or folding them inward.

THRASHING MACHINE TABLE.—Joseph B. McChesney, Dane, Wis. This table is made in two longitudinal sections, connected by hinges on the under faces of the table, and the inside edge of the inner section of each table is connected by hinges with the side extension beam of the hopper of the machine, or with any other projection at the delivery end of the hopper. The table is capable of being supported in a horizontal position when required for use, and of one section being folded upon another, and both sections made to occupy a vertical position close to the thresher when not in use.

CENTRIFUGAL HONEY EXTRACTOR.—Charles W. Metcalf, Santa Paula, Cal. Vertical shafts are journaled in the ends of the arms of a frame mounted to turn in a vessel, there being swinging comb holders supported on the shafts, a pin turning and forming a bearing for one end of the frame, a sprocket wheel on the pin and means for imparting a rotary motion thereto. The filled honeycombs can be readily inserted and the empty ones removed from this extractor, and the complete extraction of the honey from the inside and outside of the comb is secured.

Miscellaneous.

BADGE. — Charles A. Tripp, Brattleborough, Vt. This is an improvement in ornamental badges or pins to be worn upon the clothing, the invention providing a simple and secure fastening for the badge, so that it cannot accidentally become detached. The fastening consists of a spiral and a hook projecting from the back of the badge at opposite ends, and is adapted to hold the badge on the clothing in such way that it will be displayed to advantage.

CATAMENIAL SACK OR BANDAGE.—Emma H. Carpenter, Springfield, Vt. This bandage is made with side rolls having a tape fastened in the center of each roll, so that strain is relieved from the material of the bandage, and a novel arrangement of belt straps and tapes is employed to apply the bandage to the person.

WAGON TOP. — William Leonhardt, Baltimore, Md. Combined with the supporting standards is a collapsible or folding canopy frame composed of two horizontal rails and a series of short bows pivoted to the rails, all adapted to fold, with means for holding the bows in a normal vertical position. By this improvement the canopy or upper portion only of the wagon top is adapted to fold, the body or main portion being supported rigidly, although made removable from the wagon body. This improved top may be easily and quickly lowered to enable the wagon to pass under barriers.

OIL RESERVOIR. — Frank W. Mosby, Jr., Birmingham, Ala. This invention relates more particularly to an improved tank adapted for use upon locomotives, the tank being provided with a heating chamber whereby the oil is always maintained in a fluid state. The tank consists of independent oil chambers, each provided with a cover, supply vent, and discharge pipe, a heating chamber being arranged adjacent to the oil chambers, and a steam pipe entering the heating chamber. If desired, the tank is to be surrounded with a wooden casing.

CHECK CONTROLLED LOCK.—James R. Buckingham, Mount Vernon, Ohio. This is a simple and efficient lock to hold articles such as umbrella handles, canes, billiard cues, etc., and which may be unlocked by dropping into the lock a check especially adapted to the lock, and which releases the locking mechanism. In the lock case is pivoted a swinging crooked lever having an arm adapted to fit upon an article to be locked up, a locking lever having a shoulder engaging the crooked lever, and a releasing catch at one side of the lever adapted to release a check.

SEWING MACHINE ATTACHMENT. — Mary L. Birdsong, Arco'a, Miss. This is a device for attachment to machines operated by a treadle or pedal. It is a simple and readily applied removable hand lever attachment for the treadles, comprising inclined spring arms provided with a handle at their upper ends and having their lower ends bent to receive and clasp the edges of a treadle, whereby the machine may be readily run by the hand instead of by the foot of the operator.

RULER. — Victor M. Ariza, Maracaibo, Venezuela. This is a ruler for the use of draughtsmen and others which is designed to avoid the blotting and soiling of the paper by any ink that may accidentally get on the ruler, there being also a stop for indicating the length of the lines and mechanism for spacing. The casing is semi-cylindrical and provided with an absorbent lining, a roller fitted to the casing touching the lining, a pawl and ratchet mechanism turning the roller, and there being a scale and an adjustable arm for gauging the length of the lines.

CHECK PERFORATING MACHINE. — Albert R. Abbott, Boston, Mass. This is an improved machine for perforating dates and amounts in checks or documents of all descriptions. The invention provides a means whereby a table may be conveniently slid beneath any one of a series of punches to present a check, and the punches be expeditiously and conveniently operated, while the machine has a feed at once simple and positive, which may be readily thrown out of gear to receive the check or paper and will automatically return to its normal position, in clamping engagement with the article to be perforated.

PENCIL SHARPENER. — Orton H. Robinson, Grand Rapids, Mich. This sharpener comprises a tube having a longitudinally extending slot the side edges of which are sharpened and converge toward one end of the tube, the tube admitting or receiving the end of the pencil at an angle thereto for rotary action first against the diverging ends of the cutters formed by the sharpened edges. The pencil is sharpened by passing its point end through the oblique slot, and turning the pencil while the sharpener is firmly held. When the pencil is not in use the sharpener may be slipped over its pointed end to form a point protector.

INK BOTTLE.—William F. Hall, Rapid City, South Dakota. This bottle has an externally threaded neck in combination with an internally threaded thimble adapted to be screwed on to the neck of the bottle, and having an outwardly projecting flange at its upper end for supporting it in an aperture of the desk top. The bottle is particularly adapted for use on school desks, affording means for securing the filled bottle in an aperture in the desk, the mouth of the bottle being located flush with the upper surface of the desk top and the body of the bottle being hung in the desk.

SPRAYING DEVICE.—William J. Ruff, Quincy, Ill. This is an improvement on a former patented invention of the same inventor, forming a simple and durable device in which the sprayed liquids will be well mixed and which will not be liable to clog. The casing has two different sized compartments, a spraying nozzle being held on the end of the smaller one, and a spring-pressed piston valve held in the casing above the inlet opening and adapted to be seated on the part of the casing between the two compartments, while a valve carried by the piston valve projects into the opening of the spraying nozzle.

BARROW COAT. — Elise Halford, New York City. This invention relates to undergwear for infants. The coat has a waist open at the front and provided with separable shoulder straps, a separate skirt open in front having the front edges overlapping one another, with means for fastening the overlapping parts, while a waistband attached to the upper edge of the skirt is adapted to be buttoned on the lower edge of the waist.

SHELF SUPPORT. — Henry M. Hart, Auburn, Ill. This is a support especially adapted for supporting the shelves of book cases, being so made that any shelf can be quickly and easily moved to bring it to a desired height in the case, even if the shelf is loaded. A semicircular plate attached to the under side of the shelf has curved slots in which slide curved spring-pressed bolts adapted to project from the end of the plate and extend into apertures in the end walls of the case, the bolts being withdrawn by pressing upon attached flush buttons.

FRUIT JAR COVER AND LOCK.—John R. Johns, Findlay, Ohio. This invention provides a cover and a bail lock capable of being quickly and conveniently applied to or removed from the cover, causing the jar to be hermetically sealed. The bail is pivotally connected with the jar, and the cap, having a transverse channel with teeth in its bottom and a locking lever, is eccentrically mounted on the bail, the lever having a semicircular surface with teeth for engaging the teeth of the cap.

BED SPRING. — Wilbur L. Gillette, Yalesville, Conn. This is a simple form of spring and support, very cheap and durable, adapted for attachment to any ordinary bedstead rail to support the slats, and form a cheap, simple, and easy spring bed. The bracket which supports the spring is adapted to be secured in the notches of the rail where the bedstead slats are usually inserted, and the spring, which is a common form of spiral bed spring, is readily so attached to the bracket as to be supported in a vertical position, while the upper end of the spring is doubled to form a keeper adapted to receive a slat.

HARMONY HARP. — George W. Ellsworth, Bowling Green, O. This is similar in all points of construction to the ordinary orchestral pedal harp, but reduces the number of strings to twenty-six and pedals to two. It comprehends all the keys of music both major and minor and by its peculiar stringing and tuning reduces performance upon it to the very minimum of case. It is especially intended and adapted for a supplementary harmony instrument in large orchestra, dance, and street orchestra, and for accompaniments to vocal or instrumental parlor music.

NOTE.—Copies of any of the above patents will be furnished by Munn & Co., for 25 cents each. Please send name of the patentee, title of invention and date of this paper.

NEW BOOKS AND PUBLICATIONS.

The Ingersoll-Sergeant Drill Company, in their recently issued catalogue No. 8, present very full details of complete plants of mining, tunneling and quarrying machinery, together with a great deal of useful information touching a great variety of business of this nature. There have been many improvements made within a few years past in mining machinery and outfits, and this book represents the latest efforts in this line. It is profusely illustrated.

SCIENTIFIC AMERICAN

BUILDING EDITION.

APRIL NUMBER.—(No. 78.)

TABLE OF CONTENTS.

1. Elegant plate in colors of a cottage in the American style of architecture, erected at Rochelle Park, N. Y. Perspective view, floor plans, etc. G. W. Thompson, architect. Cost $5,200 complete.
2. Plate in colors of a residence at Bensonhurst, Long Island, N. Y. Perspective elevations and two floor plans, an excellent design.
3. A summer cottage on the Maine coast, near Portland. Floor plans and perspective elevation. Cost $1,470 complete.
4. A handsome residence at Sea Side Park, Bridgeport, Conn., recently erected for Col. Mason. Cost about $25,000 complete. Two perspective views and floor plans. F. H. Kimball, architect, New York.
5. A residence at Montclair, N. J., from plans prepared by Munn & Co., architects, New York. Two perspective views and floor plans. Cost $8,500 complete.
6. A mountain side residence erected for W. A. C. Chase, at Montclair, N. J. An excellent design. Floor plans and two perspective views, also an interior view. Cost $6,500 complete. Munn & Co., architects, New York.
7. An Asbury Park, N. J., cottage. Cost $3,000 complete. Floor plans and perspective view.
8. Sketch for a cemetery chapel of moderate cost.
9. View of the Richmond Hill Congregational church and parsonage.
10. Design for a family burial vault.
11. Design for organ, All Saints, Compton, Leek.
12. Miscellaneous contents: The speed of elevators.—The secret of a good memory.—Plastering composition.—A vertical double spindle shaping machine, illustrated.—Shadow an element of design.—Artificial building stone, illustrated.—Wet screens for ventilating ducts.—Irrigation in Nevada.—The Andrews metal chair, illustrated.—A plumber's blast furnace, illustrated.—An improved woodworking machine, illustrated.—The Stearns hinge, illustrated.

The Scientific American Architects and Builders Edition is issued monthly. $2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming, practically, a large and splendid MAGAZINE OF ARCHITECTURE, richly adorned with elegant plates in colors and with fine engravings, illustrating the most interesting examples of Modern Architectural Construction and allied subjects.

The Fullness, Richness, Cheapness, and Convenience of this work have won for it the LARGEST CIRCULATION of any Architectural publication in the world. Sold by all newsdealers.

MUNN & CO., PUBLISHERS,
361 Broadway, New York.

Business and Personal.

The charge for insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in the following week's issue

Wanted—80 second-hand screw-cutting lathes, 8 to 12" swing, either foot or steam power. Will pay cash. W. P. Davis, Rochester, N. Y.

"U. S." metal polish. Indianapolis. Samples free.

Presses & Dies. Ferracute Mach. Co., Bridgeton, N. J.

6 Spindle Turret Drill Presses. A.D. Quint, Hartford, Ct.

Mixing machinery. J. H. Day & Co., Cincinnati, Ohio.

For stone quarry engines. J. S. Mundy, Newark, N. J.

Portable and Stationary Cylinder Boring machines. Pedrick & Ayer, Philadelphia, Pa.

Wanted—Prices on steam plowing outfits. R. F. Wise, Selma, Ala.

For first-class patterns write to Chas. Cassell, general patternmaker, Canton, Ohio.

The Improved Hydraulic Jacks, Punches, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.

Screw machines, milling machines, and drill presses. The Garvin Mach. Co., Laight and Canal Sts., New York.

Centrifugal Pumps. Capacity, 100 to 40,000 gals. per minute. All sizes in stock. Irvin Van Wie, Syracuse, N.Y.

Crandall's patent packing for steam, water, and ammonia. See adv. next week. Crandall Packing Co., Palmyra, N. Y.

Split Pulleys at Low prices, and of same strength and appearance as Whole Pulleys. Yocom & Son's Shafting Works, Drinker St., Philadelphia, Pa.

Guild & Garrison, Brooklyn, N. Y., manufacture steam pumps, vacuum pumps, vacuum apparatus, air pumps, acid blowers, filter press pumps, etc.

The best book for electricians and beginners in electricity is "Experimental Science," by Geo. M. Hopkins. By mail, $4; Munn & Co., publishers, 361 Broadway, N. Y.

What do you want to buy? We will send without cost to you, catalogues, price lists, and information concerning anything you wish. Paret, Willey & Co., 205 Broadway, New York.

Competent persons who desire agencies for a new popular book, of ready sale, with handsome profit, may apply to Munn & Co., Scientific American office, 361 Broadway, New York.

Wanted—Position by a first class mechanical engineer with thorough technical and practical education. Excellent draughtsman and machinist. Address A. B., care Scientific American.

Going to California.

A person can take a seat in a palace car at Dearborn Station any afternoon and go over the Atchison, Topeka and Santa Fe Railroad to San Francisco, Los Angeles, or San Diego without changing cars. The fast express on this line makes at least twenty-four hours quicker time to Los Angeles than any other line, and in fact the Santa Fe is the only thoroughly comfortable route to take. The office is at No. 232 Clark Street, Chicago.

The history of the Fall River Line between New York and Boston is practically the history of steamboating on a grand scale from the time when steam became the great motor in water, as it is in land, transportation. From the first the Fall River Line has been abreast, and of late years far ahead of the times with regard to the development, improvement, and utilization of provision for traveling on the water by steam; and its boats long since became the wonder of the world for their proportions, magnificence, and appliances. But the end is not yet, and this line has still greater triumphs in reserve.

☞ Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway, New York. Free on application.

Notes & Queries

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters, or no attention will be paid thereto. This is for our information and not for publication.
References to former articles or answers should give date of paper and page or number of question.
Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.
Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.
Scientific American Supplements referred to may be had at the office. Price 10 cents each.
Books referred to promptly supplied on receipt of price.
Minerals sent for examination should be distinctly marked or labeled.

INDEX OF NOTES AND QUERIES.

	No.
Arc and incandescent lights on one circuit	4214
Barometer, to correct	4212
Electric motors	4220
Gun cotton, solubility of	4216
Induction coils and vibrators	4220
Iron, to melt with petroleum	3960
Modern wonders	4218
Silver prints, specks on	4002

(4212) C. H. G. writes: We have in our school a barometer whose cistern is full of mercury. The mercury rises about seven inches when it should rise about twenty-six inches. Please state in the columns of your paper the cause and remedy for this. A. The barometer should be refilled. There is air in the tube.

(4213) A. A. writes: I never take up your journal without finding much to interest me. The letter on vision in the issue of March 12 leads me to ask if your correspondents or you will explain why the elevation of objects at a distance seems greater when the head is in its ordinary position upright than when it is turned to a horizontal position as when lying down. Look for instance at a distant mountain, and observe carefully its apparent height. Then turn the head down, so that the eyes, instead of being on a level with each other, are one directly above the other, and observe the difference in apparent height. Is this change due to the influence of some habit in estimating distances? And which appearance is more conformable to actual proportion? A. Such effects as you describe are due to changing parallax. In our ordinary position there is no vertical parallax; lying on the side

there is vertical but no horizontal parallax, all which is due to the position of the eyes. Elevation ought to be more accurately estimated with the eyes in a vertical plane, *i. e.* with the observer lying on his side. But this again is offset by habit.

(4214) A. D. T. asks: 1. Will the same dynamo or the same electricity that produces an arc light produce an incandescent light? A. Many of the regular arc light circuits include incandescent lamps adapted to these circuits. Such lamps are used in series with the arc lights, and are each provided with a cut-out which automatically completes the circuit should the carbon filament break. It is common also to use arc lights of special construction in incandescent circuits. 2. Will the dynamo used for operating an electric street railroad produce an arc light? A. Yes.

(4215) F. O. B. writes: An experimenter would like to know if there is any kind of glue that will retain its cohesive qualities after being subjected to a continuous heat not exceeding three hundred degrees of heat, or is there any way to make a cheap combustible glue, something in the form of mucilage? A Possibly a mixture of 9 parts glue and 1 part glycerine would answer your purpose. Sodium silicate (water glass) is somewhat adhesive and resists high temperatures.

(4216) W. P. S. writes: I have some gun cotton (soluble) which does not dissolve in alcohol or ether, and I would like to have you tell me through the columns of your paper what is the reason and how can I dissolve it? A. The trouble may be in the solvents. The alcohol may contain too much water. The alcohol and ether should be mixed.

(4217) E. A. asks whether there is any metal or composition that is softer than pure lead and is at the same time not very expensive. A. We cannot suggest any substitute for the purest lead, from the points of view of ductility and cheapness.

(4218) H. J. says: Would you please be kind enough to let me know through your valuable paper what the seven modern wonders of the world are? A. The wonders of this age or century are but faintly represented by the number seven, if you mean the wonders derived from science and engineering. Foremost stands the steam engine and its wondrous work in developing power. The development of electric power, light, and transmission of language in the telegraph, the telephone, the phonograph. Then the opening of celestial space by the great telescopes. The diving into the infinitesimal by the modern microscope. And as works of engineering, the Mont Cenis Tunnel, the Menai Bridge, the New York and Brooklyn Bridge, the St. Louis Bridge, the ocean telegraph lines, modern ordnance, the Atlantic racers, the transcontinental railways, and a long list of lesser works of note.

(4219) C. L. R. asks: What is under-stood by the term cellulose wool? A. We presume you mean the rough fibrous cellulose prepared from cocoanut husks and used for packing ships to prevent sinking when penetrated by shells. The fiber expands when wet and thus closes the hole.

(4220) W. E. T. asks: 1. I have a one-eighth horse power electric motor with a Siemens H armature, the fields wound with 2 pounds No. 16 wire, the armature ¾ pound No. 18 wire; can I, by doubling the wire on the armature and winding in this way, make a plating dynamo? If not, what changes would be made? A. Connect the two arms of your field magnet in parallel and wind two No. 14 wires on the armature in parallel. 2. How are connections made in a dynamo so that current may be regulated with common switch, also to vary speed when used as a motor? A. There are two ways of doing this. According to one method, the field magnet is wound in sections and the switch cuts the current in or out. According to the other, a variable resistance is placed in the field magnet circuit, so as to introduce more or less resistance. 3. How is a dynamo constructed so as to give an alternating current? A. The coils of the armature are arranged to be brought under the field magnet poles of different name in alternation. Collecting rings are used instead of a commutator. 4. In an induction coil how are connections made so that a single cell runs the coil and any number of cells can be thrown in circuit? A. The cells are connected in series or in parallel according to the requirements of the coil, and a switch is provided which throws one or all of the cells into the circuit of the primary. 5. How is a rapid and slow vibrator for an induction coil constructed and connected with coil? A. A rapid vibrator is merely an ordinary vibrating armature like that of a vibratory electric bell. The slow moving interrupter is constructed on the same general principle, but the vibrating arm is made heavy, and the electrical contact is made by means of a mercury cup and a platinum wire attached to the vibrator. 6. How is frosting done on plated ware? A. It is generally done by means of a brush formed of swinging sharp-pointed needles rotated in a lathe, the needles being brought into contact with the work by centrifugal action.

F. W. A. asks for an incombustible ink.—V. H. L. says: Will you please give simple directions for etching on copper?—R. M. C. says: Can you inform me of the method of making gelatin sheets?—G. M. F. asks for a receipt for liquid gutta percha.—B. B. S. asks for the general method of making perfumes and for reliable formulas for the various odors.—C. H. C. says: Can you give briefly some of the methods by which the dreaded phylloxera are destroyed?—S. M. W. says: Will you please give me the various synonyms of alcohol and ammonia?—J. G. S. says: Can you inform me where I can obtain tables for converting United States and metric measures?—H. B. R. says: Will you please give through the columns of Notes and Queries the formula for ground glass varnish used by photographers?—H. K. B. says: Can you tell me what soy is?—J. J. H. says. Have you a rule or table by which I can convert the readings of the Centigrade or Reaumur scale to the customary or Fahrenheit scale?—J. C. V. wants to know of what lithofracteur is composed.—O. D. E. says: How can I convert degrees Twaddell to specific gravity?—C. B. D. says: Can you inform me through your valuable paper of a cheap method of fireproofing timber?—E. H. V. R. would like to know the ingredients of material known as compose, used in place of plaster of Paris in casting center pieces and ornaments.—W. W. S. asks: Can prints or engravings be made on paper with printer's ink from a print or engraving on an ordinary newspaper?—L. B. C. would like to find a composition to cement wood to celluloid.—E. N. asks for a receipt for making skeleton leaves?

Answers to all of the above queries will be found in the "Scientific American Cyclopedia of Receipts, Notes and Queries," to which our correspondents are referred. The advertisement of this book is printed in another column. A new circular is now ready.

Replies to Enquiries.

The following replies relate to enquiries recently published in SCIENTIFIC AMERICAN, and to the number therein given:

(3980) H. McFarlen, Chicago, says: In the January 30 number of SCIENTIFIC AMERICAN, page 75, I find a question of inquiry, art. (3980), in which your inquirer asks if there is a machine for casting sash weights? Also, if it is practical to melt iron with petroleum. To both these questions I answer yes. I have at my establishment now a machine with moulds in which to cast sash weights. I have also tested in a small but practical way the melting of iron with fuel oil, and found it quite satisfactory.

(4092) W. M. B. in query No. 4092 asks for information in regard to black specks on silver prints. I have had some experience with them, and found their cause to be iron filings, probably introduced into the silver bath from the clothing after having been at the mechanic's work bench. Small particles of iron or steel make black specks, while brass makes a pale green speck somewhat larger and more nearly round than the black ones.—J. A. MCCLINTOCK.

TO INVENTORS.

An experience of forty years, and the preparation of more than one hundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequaled facilities for procuring patents everywhere. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and persons contemplating the securing of patents, either at home or abroad, are invited to write to this office for prices, which are low, in accordance with the times and our extensive facilities for conducting the business. Address MUNN & CO., office SCIENTIFIC AMERICAN, 361 Broadway, New York.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

March 29, 1892.

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Adhesive fabrics, producing, B. Hochman........ 471,611
Air brake, H. McNulta........ 471,801
Air compressor motor, Burdon & Houston........ 471,766
Alarm. See Fire alarm.
Anemometer cup, H. J. Green........ 471,817
Animal trap, Watrous & Palmer........ 471,726
Annunciator, electrical, N. M. Watson........ 471,986, 471,987
Auger, earth, M. S. Franks........ 471,605
Axle box, car, I. H. Plummer........ 471,893
Axle boxes, dust guard for, H. M. Goodman........ 471,969
Axles, manufacture of channeled, O. C. Hall........ 471,544
Bale tie, H. C. Tully........ 471,628
Ball bats, cushion tip for, G. W. Hancock........ 471,545
Bar. See Car draw bar. Fire bar.
Barbers, combination case for, R. V. Russell........ 471,752
Barrels, mechanism used in the manufacture of, S. Wright........ 471,898
Battery. See Galvanic battery. Secondary battery.
Battery plate and making the same, storage, Donaldson & Macrae........ 471,536
Bed bottom, H. Reinhold........ 471,622
Beds, adjustable head section for, L. H. Steffey.. 471,764
Bedstead, T. R. Chambers........ 471,533
Bell, E. D. Rockwell........ 471,982, 471,983
Beverage, W. M. Myers........ 471,879
Bicycle, T. O'Brien........ 471,621, 471,651
Bicycle, S. Vale........ 472,005
Bicycle brake, W. T. Lewis........ 471,845
Bicycle handle, F. E. Youngs........ 471,932
Bicycle, saddle, O. Hanson........ 471,744
Bicycle, seat, Steers & Hunt........ 471,908
Binder, temporary, G. A. Piper........ 471,808
Bit. See Bridle bit.
Blinds, sashes, etc., attachment for, W. H. Boyle 471,989
Block. See Snatch block.
Blotter, Betts & Herbert........ 471,531
Bodkin, E. A. Willard........ 471,996
Boiler. See Wash boiler.
Boiler furnace, M. A. Foster........ 471,966
Boiler furnace, J. Leede........ 471,673
Boilers, supplementary heater for range, T. W. Rees........ 471,827
Book, J. E. Spears........ 471,905
Bookbinding machine, J. W. Clark........ 472,011
Book cover protector, adjustable, C. F. Morgan.. 471,748
Book, manifold copying, K. O. St. John........ 471,734
Bottle stopper, E. Ketterlinus........ 471,746
Box. See Axle box. Letter box.
Bracket. See Scaffold bracket.
Brake. See Air brake. Bicycle brake. Car brake.
Brake shoe, M. A. Penney........ 471,891
Brick kiln, J. C. Kinsel........ 471,769
Brick machine, H. W. Mead........ 471,677
Bricks, process of and composition for manufacturing sand, E. H. Lewis........ 471,844
Bridge gate, N. Bosmann........ 472,009
Bridle bit, N. Stalker........ 471,832
Brush fiber clamp, W. H. Gates........ 471,606
Brushes, machine for the manufacture of, G. Shaw *et al*........ 471,709
Burner. See Gas burner. Hydrocarbon burner. Oil or gas burner. Vapor burner.
Button, R. Sutro........ 471,911
Buttonhole cutter, M. Carmody........ 471,980
Calipering machine, automatic, P. Kammerer........ 471,557
Camera. See Photographic camera.
Cameras, magazine for, M. B. Feeney........ 471,715
Can. See Tin can.
Can, W. H. Atkinson........ 471,528
Can opener, A. B. Schofield........ 471,776
Can opener and painter's tool, combined, W. W. Minnerly........ 471,502
Candle, ornamented, T. V. Forster........ 471,903
Candles, machine for marking or ornamenting, C. Forster........ 471,901
Car brake, W. B. Flinn........ 471,635
Car brake, railway, R. C. Sayer........ 471,849
Car coupling, J. Dixon........ 471,848
Car coupling, G. W. Gardner........ 471,853
Car coupling, W. McConway........ 471,881
Car coupling, C. A. Pooley........ 471,568
Car coupling, J. W. Stout........ 471,910
Car coupling, F. L. Wells........ 471,708
Car coupling, Young & Moskowitz........ 471,739
Car coupling, automatic, A. J. Cleland........ 471,962
Car draw bar, T. Baril........ 471,580
Car heating apparatus, steam heater for railway, E. A. Leland........ 471,869
Car, passenger, C. L. Pullman........ 471,761
Car ventilator, J. Martin........ 471,649
Cars, running gear for street, S. Robertson........ 472,001
Cars, safety attachment for cable or electric, A. Raynal........ 471,720
Cars, switching attachment for street, O. W. Brenizer........ 471,714
Cars, trap door for railway, Snyder & McMahon.. 472,008
Carbureting apparatus, L. J. Phelps........ 471,773
Carpet or oil cloth protector, Shrum & Howarth.. 471,768
Carrier. See Harvester bundle carrier.
Cartridge, explosive, Butterfield & Batchelor........ 471,946
Case. See Package case.
Casing for cavities, C. Vetter........ 471,629
Casket handle, T. McGovern........ 471,771
Casting and dressing machine, type, J. G. Pavyer 471,890
Chair. See Railway rail chair.
Channeling machine, Z. Lassor........ 471,797
Checkrein, overdraw, J. McKenney........ 471,749
Cheese bandager, C. D. Hadcock........ 471,756
Cheese cutter, Gibson & Cameron........ 471,716
Chuck, lathe, J. F. Rouston........ 471,572
Churn motor, W. Omer........ 471,886
Clamp. See Brush fiber clamp. Wood clamp.
Cleaner. See Grain or coffee cleaner.
Clothes wringer, C. Wheeler, Jr........ 471,924
Clutch, S. B. Williams........ 471,589
Clutch mechanism for power presses, N. C. Stiles. 471,777
Cockeye, A. E. S. Howard........ 471,640
Coin freed or actuated machine, H. A. Burt........ 471,808
Coin receptacle and register, G. K. Cooke........ 471,536
Coking oven, H. Ekelund........ 471,692
Collar, horse, M. T. Burke........ 471,600
Combination table, T. J. Fearns........ 471,815
Commutator brush, R. Hirsch........ 471,792
Cooking utensil, Ross & Westcott........ 472,002
Cooler. See Milk cooler.
Corn and cob crusher and grinder, F. S. Rich........ 471,898
Corn popper, A. H. Gleason........ 471,994
Corner iron, inside, C. E. Hart........ 471,630
Cornice and eaves trough brake machine, Brown & Boggs........ 471,589
Corset, A. Bouchard........ 471,507
Coupling. See Car coupling. Hose coupling. Thill coupling.
Crane, hoisting, J. O. Richmond........ 471,898
Crimping machine, R. Whitaker........ 471,935
Crusher. See Corn and cob crusher.
Cultivator, C. E. Bool........ 471,841
Cup. See Anemometer cup.
Current motor, L. C. Neal........ 471,564
Curtain fixture, W. Doulin........ 471,962
Cutter. See Buttonhole cutter. Cheese cutter.
Damper, stovepipe, E. A. Hoefer........ 471,718
Dental disk holder, E. E. Park........ 471,887
Dental engine, Miller & Wells........ 471,877
Dental tool, Sweet & Parker........ 472,004
Developing dish, O. Francke........ 471,543
Diamido-diphenylmethan bases, making, E. Vongerichten........ 471,659
Diffusion apparatus, E. Gschwind........ 471,995
Digger. See Post hole digger.
Disinfecting apparatus, N. M. Dyer........ 471,603
Disinfecting device, N. M. Dyer........ 471,602
Ditching machine, S. Starr........ 471,834
Dock, permanent dry, W. E. Simpson........ 471,906
Door, electrically controlled trap, F. C. Callahan.. 471,947
Door hanger track, J. G. Lane *et al*........ 471,867
Door or window screen, M. J. Tenney........ 471,579
Drainer, F. A. Strater........ 471,578
Drawers, E. Walker........ 471,919
Dyes, making rosaniline, B. Homolka........ 471,638
Eaves or roof gutter, E. R. Densmore........ 472,014
Eaves trough hanger, W. C. Berger........ 471,936
Electric cut-out, automatic, E. A. Manship........ 471,997
Electric generator or motor, dynamo, C. W. & L. B. Atkinson........ 471,691
Electric light crane, J. Gallagher........ 471,968
Electric light support, J. J. Walsh........ 471,837
Electric lock, J. G. Thompson........ 471,913
Electric machine or motor, dynamo, Goolden & Atkinson........ 471,693
Electric motors or dynamo-electric machines, brush holder for, C. A. Hussey........ 471,819
Electric switch, H. Hubbell........ 471,612
Electric switch, C. G. Perkins........ 471,760
Electric telpherage apparatus, M. W. Hassan........ 471,790
Electric wire joint, R. H. Smith........ 471,625
Electric wires, pole for supporting, J. H. Huntress........ 471,750
Electrode, electro-therapeutic, H. Bonis........ 471,850
Electrode, secondary battery, C. F. Winkler........ 471,591
Elevator, J. A. Dean........ 472,012
Elevator safety device, E. W. Naylor........ 471,825
Embroidering machines, fabric holding frame for, J. Irish........ 471,798
Endless apron carriers, driving mechanism for, J. Dick........ 471,743
Endoscopic instrument, J. W. Daily........ 471,990
Engine. See Dental engine. Rotary engine. Steam engine.
Envelope for mailing packages, H. G. Mackinney. 471,846
Excavator, C. A. Warren........ 471,920
Exhibitor, merchandise, F. E. Bush........ 471,989
Extension table, F. P. Cobham........ 471,954
Eyeglass holder, G. Maier, Jr........ 471,734
Fans, means for operating rock, R. Wehrle........ 471,581
Fare registering device, M. Fortuno........ 471,540
Faucet, C. Ruchti........ 471,574
Faucet, beer, G. H. Walker........ 471,630
Feed trough, W. A. Leech........ 471,868
Fence, J. E. Dusang........ 471,682
Fence machine, C. H. Kellogg........ 471,979
Fence machine, wire, M. L. Jones........ 471,978
Fence strands, machine for making wire, E. F. Hathaway........ 471,609
Fence, wire and picket, J. Speakman........ 471,831
Fertilizer distributer, C. W. Nicholson........ 471,884
Fifth wheel, T. L. Bosart........ 471,806
File cover, court, A. E. Walkup........ 471,660
File or binder, temporary, H. George........ 472,018
File, prescription, G. L. Goodman........ 471,856
Filter, L. N. Blessing........ 471,840
Filter, W. M. Deutsch........ 471,811
Filter presses, plate for, J. P. Boetiger........ 471,741
Fire alarm, automatic electric, L. G. Woolley........ 471,929
Firearm, breech-loading, F. Sifuentes........ 471,904
Fire bar, movable, Heider & Schuscha........ 471,695
Fireproof construction, W. Orr........ 471,772
Fish hook, C. A. Haviland........ 471,548
Flue dust, apparatus for condensing, H. W. Hixon........ 471,860
Flushing tank, H. H. Craigie........ 471,587
Frame. See Slate frame.
Fuel, storage tank for liquid, C. A. King........ 471,615
Furnace. See Boiler furnace. Hot air furnace. Ventilating furnace.
Furnace door and boiler front, J. Fea........ 471,607
Galvanic battery, W. Burnley........ 471,945
Game, H. A. Doty........ 471,696
Game apparatus, G. B. Nichols........ 471,883
Game counter, A. J. Youlin........ 471,593
Gas burner, F. Leibman........ 471,799
Gas burner safety attachment, G. L. Thunen........ 471,914
Gas pressure regulator, automatic, J. G. Strub........ 471,657
Gas, process of and apparatus for making, J. Leede........ 471,671
Gate. See Bridge gate. Safety gate.
Gate, H. Barker........ 471,935
Gate, J. Elcock........ 471,851
Generator. See Electric generator.
Gold, silver, etc., machine for separating, J. B. Freeman........ 471,731
Governor, marine engine, E. F. Wallgren........ 471,725
Grafting, method of and device for, W. M. Rowell........ 471,573
Grain binder, C. A. A. Rand........ 471,896
Grain elevating and measuring machine, S. P. Ford........ 471,965
Grain or coffee cleaner, T. A. Seip........ 471,901
Grate, ventilating, S. Shaw........ 471,575
Grater, E. J. Blueher........ 471,937
Guest call, automatic, W. H. Perry........ 471,686
Gum moistener, A. Gartner........ 472,017
Gun, automatic magazine, J. M. & M. S. Browning........ 471,782
Gun, machine, J. M. & M. S. Browning........ 471,783, 471,784
Handle. See Bicycle handle. Casket handle.
Hanger. See Eaves trough hanger.
Harness girth, I. B. Ingle........ 471,554
Harrow, F. C. Merrill........ 471,719
Harvester bundle carrier, B. F. Stewart........ 471,737
Harvester, corn, W. G. Atwood........ 471,632
Harvester, corn, J. W. Parker........ 471,889
Hat rounding machine, C. H. Reid........ 471,751
Hay rake, horse, W. R. Mann........ 471,648
Head rest for beds, C. V. Reeves........ 471,895
Heater. See Vehicle heater.
Heater and shade, combined, F. Busch........ 471,742
Heating apparatus, C. A. Sawin........ 471,754
Hinge, J. H. Mahan........ 471,981
Hoisting machine, J. Cosgrove........ 471,955
Holder. See Dental disk holder. Eyeglass holder. Pen holder. Pipe holder.
Hones, composition for dressing, C. A. Prarsy........ 471,569
Hook. See Fish hook. Whiffletree hook.
Horseshoe, C. E. Howard........ 471,864
Hose coupling, F. W. Wright........ 471,661, 471,662
Hot air furnace, A. Brake........ 471,684
Hot air register, J. W. Collins........ 471,681
Hydrocarbon burner, H. T. Russell........ 471,731
Ice making machine, D. L. Holden........ 471,684
Indicator. See Station indicator.
Indicator lock, L. T. Crabtree........ 471,956
Insect exterminator, L. G. Tuttle........ 471,779
Insulated electric conductor, J. B. Williams, 471,867, 471,588
Iron. See Corner iron.
Iron or steel, determining the temper of, C. A. Casperson........ 471,809
Jar fastener, G. B. Valentine........ 471,917
Joint. See Electric wire joint. Rod joint.
Joint mould, J. C. Raymond........ 471,894
Kiln. See Brick kiln.
Knife, Walker & Peifer........ 472,006
Knitting machine feeding mechanism, S. L. Otis.. 471,566
Knitting machine, straight, A. Heidler........ 471,698
Knob attachment, W. F. & W. M. Morton........ 471,563
Lamp, W. S. McLewee........ 471,822, 471,823
Lamp filler, T. Hipwell........ 471,791
Lamp, pocket, S. G. Speir........ 471,985
Lamp support, electric, C. J. Klein........ 471,645
Lamps, bracket for incandescent electric, J. H. Goehst........ 471,728
Lamps, manfacture for incandescent electric, F. S. Smith........ 471,576
Lamps, mast-arm switch for electric, T. Dillon........ 471,730
Land roller, Mailery & Youngs........ 471,870
Lathe, Loveland & Henn........ 471,674
Lathe tool, R. A. Berger........ 471,829
Leaching solutions, purifying hyposulphite, E. R. Holden........ 471,550
Lead, making white, Waller & Sniffin........ 471,780
Letter box, house door, A. H. Van Pelt........ 471,918
Letter box, house door, S. Witherell........ 472,007
Liquid dispensing apparatus, J. C. Mayrhofer........ 471,821
Lock. See Electric lock. Indicator lock. Nut lock. Oar lock. Whip lock.
Lock, A. Arens........ 471,594, 471,595
Loom for weaving pile fabrics, Terry & Rawnsley 471,835
Loom, swivel, J. C. Brooks........ 471,685
Lubricator. See Sight feed lubricator.
Lumber sorter, F. S. Farr........ 472,016
Mashing machines, adjusting device for, C. Kaestner........ 471,613
Measuring caddy, Jones & Agate........ 471,670
Meat tendering implement, P. A. Hause........ 471,973
Mechanical movement, C. B. Cottrell........ 471,785
Mechanical movement, J. G. Young, Jr........ 471,931
Metal foil packages, putting up, J. H. J. Haines.. 471,609
Metallic facing for buildings, L. L. Sagendorph.. 471,722
Milk cooler, Heulings, Jr., & Evans........ 471,974
Milk cooler, O. Leonard........ 471,646
Miner's candlestick, F. Muenger........ 471,998
Mould. See Joint mould.
Monument, F. M. Hawkins........ 471,758
Motion, device for transmitting, G. S. Strong, 471,655, 471,656
Motor. See Air compressor motor. Churn motor. Current motor. Spring motor.
Mowers, cutter bar for, J. A. Noel........ 472,000
Music, extension key for transposing, J. Bracken. 471,713
Musical instrument, mechanical, C. Kretschmar.. 471,559
Musical tones by electro-magnetism, method of and apparatus for producing, E. C. Ohmart........ 472,019
Nail puller, M. Loftin........ 471,873
Nut lock, A. J. Gould........ 471,608
Nut lock, Mathie & Fletcher........ 471,875
Nut lock, D. C. Terry........ 471,627
Nut lock, safety, A. M. Krone........ 471,796
Oar lock, G. H. Haslop........ 471,546
Oil or gas burner, G. S. Sanford........ 471,753
Oils, refining, T. Drake........ 471,963
Ores, apparatus for desulphurizing, J. Leede........ 471,618
Ores, apparatus for treating refractory, J. Leede, 471,617, 471,672
Ores, treating refractory, J. Leede........ 471,616
Overalls, J. H. Fitz........ 471,789
Package case, W. Young........ 472,003
Packages, sling for, F. Hohorst........ 471,861
Packing, rod, E. H. Stone........ 471,577
Paint, E. W. Grafton........ 471,970
Paper box machine, J. G. Young, Jr........ 471,930
Paper fruit basket, W. Moran........ 471,680
Paper making machine, A. Aldrich........ 471,631
Paper pails, hot pressing machine for, Hull & McEwan........ 471,926
Paper reel, W. R. Farnsworth........ 471,788
Paper slot machine, toilet, F. E. Housh........ 471,705
Pencil sharpener, A. Lachenmeyer........ 471,747
Pen holder, B. F. Wise........ 471,928
Perforating device, paper, W. F. Wells........ 471,923
Photographic camera, G. Whitney........ 471,584, 471,585
Photographic film package, G. Whitney........ 471,586
Photographic shutter, Low & Shakespeare, Jr........ 471,675
Piano action, J. Herrburger........ 471,717
Pipe, C. Schlei........ 471,775
Pipe connection or coupling, R. Parish........ 471,785
Pipe elbow, sheet metal, W. H. Noble........ 471,620
Pipe holder, T. E. Brink........ 471,940
Planter and cultivator, combined, Horne & Asbell........ 471,863
Planter, seed, O. F. Yarbrough........ 471,728
Planter, tobacco, A. F. Shuler........ 471,624
Plow, T. J. Fariss........ 472,015
Plow, D. C. Turner........ 471,915
Plow, H. G. Webb........ 471,922
Plows, weed cutter for cultivator, J. Rosencrans. 471,687
Pocketbook support, J. G. Gareis........ 471,854
Poison distributor, S. M. Coulson........ 471,853
Poison distributor, C. H. Pickering........ 471,892
Post hole digger, T. A. Cross........ 471,767
Pottery machine, C. Breitschwerth........ 471,807
Powder puff, E. A. Bailey........ 471,880
Power transmission, J. F. Devold........ 471,812
Press. See Printing press.
Press, S. D. Tucker........ 471,778
Printing press, plate, S. Steen, Jr........ 471,723
Propeller, G. K. Eacrett........ 471,604
Propeller, screw, P. Stauch, Jr........ 471,907
Protector. See Book cover protector. Carpet or oil cloth protector.
Puller. See Nail puller. Stump puller.
Pump, steam, D. F. Lepley........ 471,870
Pump, well, T. J. Sayre........ 471,829
Pumps, means for operating, Brown & Berger........ 471,942
Puzzle, D. V. Brown........ 471,941
Puzzle, J. A. McDougall........ 471,706
Pyrotechnic, C. Del Grande........ 471,703
Rack, F. E. Nutting........ 471,885
Rails to main line rails, means for securing guard, H. H. Sponenburg........ 471,906
Railway, electric, W. C. Goss........ 471,543
Railway rail chair, G. H. Graham........ 471,971
Railway rail dressing device, D. W. Jones........ 471,977
Railway tie, metallic, Westmacott & Hutchinson 471,582
Railway track fastening, Westmacott & Hutchinson........ 471,583
Railway track wrench, ratchet, Wever & Blount.. 471,765
Rake. See Hay rake.
Reaping and mowing machines, finger bar for, Lydon & Stacy........ 471,560
Recorder. See Time recorder.
Reel. See Paper reel.
Refrigerator, Burnham & Meyers........ 471,944
Register. See Hot air register.
Regulator. See Gas pressure regulator.
Rein support, K. M. Dean........ 472,013
Ridger, pulverizer, seed planter, and fertilizer distributer, combined, F. F. Ferguson........ 471,852
Rod joint and bearing, connecting, M. A. Clennam........ 471,953
Roller. See Land roller.
Rolling machine, metal, F. W. Wood........ 471,727
Roofer's bending tool, W. L. & H. Heberling........ 471,637
Rotary engine, W. Fogler........ 471,816
Rug and cloak, combined, J. A. Shelton........ 471,903
Ruling apparatus, knockdown slate, E. S. Cross.. 471,957
Sack fastener, J. H. Shaw........ 471,623
Saddle, gig, L. Duff........ 471,634
Safety gate, C. H. & G. D. Westover........ 471,738
Sail reefing, Newcomb & Wiley........ 471,847
Sash fastener, N. B. Hurd........ 471,553
Sash, window, S. C. Young........ 471,663
Saw setting machine, J. B. Ivey........ 471,641
Saw, tree felling, G. R. Desmond........ 471,810
Sawmill carriages, indicator for, J. Burlingame... 471,948
Scaffold bracket for painters, J. F. Shoop........ 471,762
Scraper, road, C. A. McAlpine........ 471,800
Screen. See Door or window screen.
Seat. See Bicycle seat.
Secondary battery, C. F. Winkler........ 471,590, 471,592
Sewing machine needle, E. J. Hall........ 471,867, 471,972
Shaft bearing, turbine, J. Gulden........ 471,694
Shawl strap, W. J. Acheson........ 471,988
Shearing machine, hydraulic, E. W. Naylor........ 471,824
Shelf, portable, S. Mosbacher........ 471,697
Shingle, metallic, H. H. Bohen........ 471,938
Shipping can, self-sealing, Lisk & Brown........ 471,871
Shirt, J. Gillner........ 471,685
Sight feed lubricator, W. S. Ashton........ 471,934
Signal. See Switch signal.
Signal transmitting system, H. A. Chase........ 471,534
Slate for the blind, E. Sthreabley........ 471,653
Slate frame, H. S. Semmel........ 471,902
Sled and roller coaster, combined, F. W. Horstmannshoff........ 471,639
Smoke consumer, E. J. Hadlock........ 471,757
Smoke consumer, R. & S. Rogerson........ 471,774
Snap switch, reciprocating, J. Gibbs........ 471,993
Snatch block, A. Uren........ 471,755
Soap, manufacturing, W. A. Grant........ 471,668
Spike, J. W. Todd........ 471,658
Spinning spindle attachment, L. W. Huyck........ 471,976
Spirits or other liquors, apparatus for maturing, J. McKinless........ 471,707
Spout, pouring, E. R. Deverall........ 471,961
Spring motor, A. S. Parker........ 471,888
Square, bevel, G. R. Richardson........ 471,897
Stallion shield, Palmer & Daniel........ 471,567
Starch refining and separating machine, centrifugal, G. A. Kerr........ 471,614
Starching machine, J. McKay........ 471,619, 471,720
Station indicator, W. S. Mallard........ 471,874
Stay, garment, H. W. Geer........ 471,607
Steam engine, W. A. Pitt........ 471,804
Steering apparatus, C. H. Richardson........ 471,570
Stereotype forms, machine for trimming segmental cylindrical, J. J. Clause........ 471,601

Stopper. See Bottle stopper.
Stoves, hydrocarbon for, Hatfield & Bennett 471,647
Strap. See Shawl strap.
Street sweeper, Jones & Gillies 471,662
Stump puller, W. B. Merrin 471,979
Sucker rod socket, L. B. Hitchcock 471,975
Sulky, J. V. Upington 471,916
Swing, O. Strickland 471,700
Switch. See Electric switch.
Switch signal torpedo, F. C. Leimbert et al 471,940
Syringe and spreader, combined, A. E. Magoris 471,647
Table. See Combination table. Extension table.
Table, J. H. Martin 471,676
Tank. See Flushing tank.
Tap, screw, A. Cameron 471,948
Telegraph poles, foot support for, E. A. Streeter 471,696
Telephone, J. H. Howard 471,745
Telephone attachment, J. R. Hills 471,749
Telephone receiver, Christy & Baldwin 471,535
Telescope, A. Rudall 471,708
Tension device, H. D. Robinson 471,571
Tent, J. W. Ormsby 471,848
Tentering machine, sprocket wheel for, D. Babcock 471,699
Thermometer attachment for ovens, A. B. Strickler 471,654
Thill coupling, O. T. Welch 471,690
Ticket, railway, R. R. Metheany 471,676
Tie. See Rail tie. Railway tie.
Tiles, manufacture of, H. Reginsley 471,740
Time recorder, workman's, Johnston & Egan 471,733
Tin can, W. Pratt 471,736
Tire for bicycles, rubber, E. R. De Wolfe 471,815
Tire heating apparatus, J. Harris 471,704
Tires, heater for cementing rubber, J. Parkinson 471,962
Tobacco cutting device, plug, T. Hill 471,959
Tobacco stick or hanger, J. H. Cain 471,532
Torpedo placer, L. Sennett 471,904
Toy cannon, J. B. Kibler 471,536
Track cleaning apparatus, Dowd & Long 471,814
Trap. See Animal trap.
Tricycle, A. E. Miller 471,770
Trough. See Feed trough.
Trousers stretcher and hanger, G. E. Hamlin 471,888
Trousers, waistband for, L. Frank 471,967
Trousers, waistband for, N. J. Schloss 471,830
Truck, car, S. D. King 471,644
Truck, car, J. Taylor 471,912
Truck, house moving, J. C. Brossier et al 471,566
Trunk, H. W. Rountree 471,680
Trunk, convertible, J. Dwyer 471,720
Tube expander, O. Fagan 471,676
Tubes of rods, tool for raising casting, W. Richards 471,808
Tug, shaft, S. H. Hass 471,838
Typewriting machine, L. F. Clara 471,795
Typewriting machine, E. F. Estes 471,964
Typewriting machine, W. P. Kidder 471,788, 471,790
Typewriting machine, G. B. Webb 471,710
Typewriting machine attachment, G. F. Lear 471,873
Typewriting machine attachment, T. H. Stackhouse 471,829
Vaginal instrument, W. A. Howard 471,905
Valve, combined starting and blow-off, S. M. Vanclain 471,695
Valve, compound engine, A. L. Church 471,842
Valve controller, Nash & Eddy 471,802
Valve for engines, steam-actuated, A. A. Nancey 471,982
Valve for gas compressors, P. Dietz 471,797
Vapor burner, C. V. Best 471,561
Vehicle heater, A. E. Jones 471,985
Vehicle wheel, Arbuin & Anderson 471,933
Vehicle wheel, Dempsey & Folk 471,960
Vehicle wheel, G. G. Ward 471,781
Velocipede, E. G. Latta 471,758
Velocipede, ice, J. Bart 471,909
Velocipede pedal, T. A. Watson 471,991
Velocipede saddle, J. A. Hunt 471,986
Vending or other purposes, coin-actuated device for, Bacon & Hill 471,712
Veneer, ornamental wood, N. A. Hull 471,563
Ventilating furnace, L. J. Treey 471,701
Ventilator. See Car ventilator.
Vise, pipe, A. W. Cash 471,010
Wagon body brace, J. W. Sandy 471,900
Wall paper hanging machine, E. M. Graham 471,626
Wall paper pasting machine, E. H. Danforth 471,958
Wash boiler, C. C. T. Nourse 471,565
Washing machine, P. Foster 471,541
Washing machine, Hornby & Lent 471,962
Water conduct against fires, safety, N. Munn 471,669
Water wheel, J. N. Choate, Jr 471,951
Well drilling apparatus, deep, W. Webber 471,580
Wheel. See Fifth wheel. Vehicle wheel. Water wheel.
Wheel, Ames & Herrmann 471,711
Whetting and sharpening the cutting edges of edge tools, etc., apparatus for, C. Spruce 471,679
Whiffletree, J. H. McCallum 471,980
Whiffletree hook, G. Carlson 471,949
Whip lock and socket, combined, H. J. Saxton 471,653
Whip socket, D. M. Johnson 471,555
Window, C. G. Anderson 471,720
Wire tightener, W. D. Hoyt 471,561
Wood clamp, E. L. Still 471,909
Wood surfaces, method of and apparatus for graining, J. Shannon 471,698
Wrecking frog, W. H. Wilmore 471,997
Wrench. See Railway track wrench.
Wrench, J. R. Everitt 471,539
Wrench, G. W. Ginger 471,805
Wringer. See Clothes wringer.
Writing, device for holding and guiding the fingers in, A. D. Jolly 471,506
Yarns, machine for printing, Marchetti & Crossley 471,563
Yeast, apparatus for and method of separating and assorting, G. Sobotka 471,689
Yeast, separating and assorting, G. Sobotka 471,688
Yoke neck, J. F. Kellogg 471,843

TRADE MARKS.

Apples, Robyn Bros 20,914
Armpit shields, Brooklyn Shield Co 20,911
Baking powder, Thomson & Taylor Spice Company 20,909
Belting for machinery, leather, C. A. Schieren & Co 20,915
Bitters, G. Kroeschell 20,919
Bitters, peach, H. Klee 20,920
Bitters, stomach, A. H. F. Gonats 20,917
Books of fiction, history, biography, travels, and poetry, Setter Brothers 20,904
Cigars, C. Alvarez 20,922
Coffee, H. A. Fry & Co 20,913
Collars and cuffs, waterproof, Arlington Collar and Cuff Company 20,901
Confectionery for coughs and colds, Smith Brothers 20,907
Extracts for food, flavoring, Thomson & Taylor Spice Company 20,917
Gold and silver plated flat and table ware and jewelry, W. R. Kerr & Co 20,912
Hosiery, J. Smedley 20,908
Insulated wires, inclosed electric cables, and insulating material, Indiana Rubber and Insulated Wire Company 20,916
Medicine for coughs, bronchitis, asthma, and like diseases, J. G. Laviolette 20,910
Necklaces made of medicinal substances, to be worn by infants, F. Korn 20,906
Paste, dry, Diamond Paste Company 20,905
Pianos, D. H. Baldwin & Co 20,903
Plushes, L. C. Chase & Co 20,896
Remedy for rheumatism, fluid, Hafertepen Bros 20,908
Spices, ground, Thomson & Taylor Spice Company 20,918
Varnishes, G. L. Wood & Son 20,919

DESIGNS.

Bath tub, E. Saylor 21,436
Gas retorts, mouthpiece for, C. L. Rowland 21,438
Hammock, L. E. Palmer 21,434
Insulator bracket, C. Wirt 21,439
Lamp fount, W. C. Homan 21,429
Metal, ornamentation of, J. J. Sweeney 21,437
Monument, W. H. Perry 21,435
Siding plate, W. C. Berger 21,438
Spoon, etc., C. C. Wentge 21,441
Stove, heating, C. F. Wahler 21,442
Stove, lamp, C. H. Boeck 21,427
Toy gun, E. H. Ives 21,431
Type, font of printing, H. Ihlenburg 21,440
Water closet seat and back, H. Sievert 21,439
Wick tube and burner plate, W. H. Clemes 21,443

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print, issued since 1863, will be furnished from this office for 25 cents. In ordering please state the name and number of the patent desired, and remit to Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list, provided they are simple, at a cost of $40 each. If complicated the cost will be a little more. For full instructions address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.

Advertisements.

Inside Page, each insertion - - 75 cents a line
Back Page, each insertion - - - - $1.00 a line

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.

ADAMANT WALL PLASTER
BEST PLASTERING MATERIAL KNOWN.
No experiment. Its success has been phenomenal.
Thirty factories in this and other countries.
ADAMANT MFG. CO., SYRACUSE, N. Y.

Patent Foot Power Machinery
Complete Outfits.

Wood or Metal workers without steam power, can successfully compete with the large shops, by using our New LABOR SAVING Machinery, latest and most improved for practical shop use, also for Industrial Schools, Home Training, etc. Catalogue free.
Seneca Falls Mfg. Co.
695 Water Street, Seneca Falls, N. Y.

T. A. C. MARCH 1st to OCTOBER 1st. Sales of a patented specialty over two millions. Manufactured on royalty. Inventors, write us.
THE TUSCARORA ADVERTISING CO., COSHOCTON, O.

FOR LEASE—THE MIDDLEBROOK GRANITE Quarries, at Middlebrook, Mo., operated for the past 10 years by the Syenite Granite Co., of this State, will be leased for ten years from June 15th, 1892. They are the largest and finest quarries in the West, containing the well-known red granite so extensively used in many of the finest buildings, monuments, bridges, etc., in the country. Sealed proposals will be received and opened at noon, on June 1st next, for a ten year lease of the property. This Company reserves the right to reject any and all bids. You are cordially invited to inspect the property.
IRON MOUNTAIN CO., Gay Building, St. Louis, Mo.

THE GIBBS PATENT DUST PROTECTOR.
For protecting the nose and mouth from inhalations of dust of every character. Invaluable in mills and factories. Perfect protection with perfect ventilation. Dust inhaled into the nose and lungs results in Catarrh and Consumption. Nickel plated protector sent postpaid on receipt of $1.
Gibbs Respirator Co.,
98 S. La Salle St., Chicago.

WANTED.—A good second-hand band re-saw, to cut boards 22 inches wide; state lowest price for cash. Address NEEDHAM PIANO ORGAN CO., Washington, Warren County, N. J.

WOOD WORKING MACHINERY
For Veneer, Fruit Package and Barrel Works. Handle, Spoke and Turning Factories.
I. E. Merritt Machinery Co., Lockport, N. Y.

ESTABLISHED 1850.
DEFIANCE MACHINE WORKS
DEFIANCE, OHIO, U. S. A.,
BUILDERS OF
HUB, SPOKE, WHEEL, BENDING, WAGON AND CARRIAGE MACHINERY.

No. 1, HEAVY HUB BORING MACHINE.

Chucks The NATIONAL.
INDEPENDENT.
UNIVERSAL.
COMBINATION.
Strongest. Easiest to change. Best Finish. Reversible Jaws (patented) giving 5 changes including every possible desired position.
NEW CATALOGUE, illustrated, sent free. Liberal discounts. Prompt shipment. Address
The Nat'l Chuck Mfg. Co., Mt. Vernon, N. Y.



NOISELESS ROTARY FANS.
These fans can be fastened to ceiling, and driven by a round belt directly from a Backus Water Motor, Steam Engine, or other power. By changing angle of blades amount of air can be regulated. Two or more fans can be connected on ceiling. The Backus Patent Fans are noiseless, and found invaluable in meat markets, restaurants, dining rooms, bakeries, hotels, etc. They will keep your place cool and free from flies. Write for special circular to
Backus Water Motor Co., Newark, N. J., U.S.A.

IRON TANKS CHEAP. 4 iron tanks built for pressure. Capacity 90[illegible] gals. Rust proof. Cost $350. Will not refuse any reasonable offer. Address
G. W. Presbrey, Palmer's Theatre, New York.

ELECTRIC POWER APPARATUS,
FOR EVERY VARIETY OF MECHANICAL WORK.
SAFE, SURE, RELIABLE.
ESTIMATES FURNISHED. SEND FOR CATALOGUES.
THOMSON-HOUSTON MOTOR CO.,
620 ATLANTIC AVENUE, BOSTON, MASS.

Shepard's New $60 Screw-Cutting Foot Lathe

Foot and Power Lathes, Drill Presses, Scroll Saw Attachments, Chucks, Mandrels, Twist Drills, Dogs, Calipers, etc.
Lathes on trial. Lathes on payment.
Send for catalogue of Outfits for Amateurs or Artisans.
Address H. L. SHEPARD, AGENT,
141 West 3d Street, Cincinnati, Ohio.

FRET SAW or BRACKET WOODS
Planed Ready for Use. Books of Design.
Send stamp for catalogue.
CABINET WOODS AND VENEERS.
THE E. D. ALBRO CO.,
Eastern Branch, 209 Lewis St., New York, U. S. A.
H. T. Bartlett, Mg'r. F. W. Honerkamp, Ass't Mgr.
Mills, Cincinnati, Ohio.

RIFE'S AUTOMATIC HYDRAULIC ENGINE OR RAM
SUPPLYING WATER FOR
Irrigation, Small Towns, Railroad Tanks, Factories, Steam Mills, Dairies, Country Residences, Stock Yards, etc. *Automatic, Efficient, Durable, and Inexpensive.* Send for fully illus. catalogue.
See illustrated notice in Sci. Am., p. 5, July 5, '90.
Rife's Hydraulic Engine Mfg. Co., Roanoke, Va.

WINANS ANTI INCRUSTATION POWDER
OR BOILER COMPOUND FOR REMOVING SCALE IN BOILERS.
PEERLESS PACKING
MAGNOLIA ANTI FRICTION METAL
ST. MARYS ELECTRIC CRANK PIN REGULATOR
J. C. WINANS 220 FREMONT ST.
SAN FRANCISCO, CAL.

Improved Screw Cutting Foot and Power. LATHES
Drill Presses, Shapers, Band, Circular, and Scroll Saws. Machinists' Tools and Supplies. Lathes on trial.
Catalogue mailed on application.
SEBASTIAN LATHE COMPANY,
44-46 Central Ave., Cincinnati, O.

The Sebastian-May Co.
Improved Screw Cutting Foot & Power LATHES

Drill Presses, Chucks, Drills, Dogs, and Machinists' and Amateurs' Outfits. *Lathes on trial.* Catalogues mailed on application.
165 to 167 Highland Ave., SIDNEY, OHIO.

BEATTY Pianos, $125. Organs, $45. Want Agents. Cat'g free. Don't P. Beatty, Washington, N.J.

ICE-HOUSE AND COLD ROOM.—BY R. G. Hatfield. With directions for construction. Four engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, 59. Price 10 cents. To be had at this office and of all newsdealers.

MAGIC LANTERNS
AND STEREOPTICONS FOR LANTERN SLIDES
SCHOOLS & PUBLIC ENTERTAINMENTS
COLORED & UNCOLORED
SEND FOR CATALOGUE
QUEEN & CO.
PHILA. PA.

THIS ANNOUNCEMENT is to give notice that Charles M. Dake, of Viola, Iowa, has purchased of Charles Shefferd, of Clearwater, Neb., the county right of Douglas and Lancaster counties, Neb., paying for the same the sums of $375 and $425 respectively, for the right to manufacture and sell the Shefferd Kettle Tilter Lifter. He should be able to clear the $800 by having a good supply at the State and County Fairs. O. W. Carpenter, of Dedham, Iowa, has been appointed general agent for the State of Illinois.

OVER 1200 BICYCLES
in stock. New and second-hand. Cash or time.
A. W. GUMP & CO.
DAYTON, OHIO.
Send for list.
AGENTS WANTED.
BICYCLES, GUNS and TYPEWRITERS TAKEN IN EXCHANGE.

SCIENTIFIC AMERICAN SUPPLEMENT. Any desired back number of the SCIENTIFIC AMERICAN SUPPLEMENT can be had at this office for 10 cents. Also to be had of newsdealers in all parts of the country.

STEVENS PATENT RELIABLE DIVIDER. No. 60
Forged from heavy stock. Operated with a right and left hand screw. Made with two tension screws, removing any back lash.
3 inches, price per pair $1.50
Ideal and Leader Spring Calipers and Dividers, Ideal Surface Gauges, Depth Gauges, and Fine Machinists' Tools.
Illustrated catalogue free to all.
J. STEVENS ARMS & TOOL CO.,
P. O. Box 280, Chicopee Falls, Mass.

BUILDERS OF HIGH GRADE BOATS.

Speed 20 miles an hour.
We Build Everything, from a Canoe to a Steam Yacht.
Complete Stock Oars, Sweeps and Boat Trimmings.
We Make all Sizes Pipe Boilers and Engines.
Cedar Row Boats from $25 upward.
Vapor and Steam Launches from $300 upward.
SEND 10c. FOR COMPLETE CATALOGUE.
DAVIS BOAT AND OAR CO., DETROIT, MICH., U. S. A.

PORTER AUTOMATIC ENGINE (CENTER CRANK)
ECONOMY IN FUEL REGULATION OF SPEED ABSENCE OF ALL PARTS
PORTER MFG. CO. LIMITED.
SYRACUSE N.Y.
BUILDERS OF AUTOMATIC AND PLAIN SLIDE VALVE ENGINES ALSO CONSTRUCTORS OF TANKS STAND PIPES BOILERS AND STONE CRUSHERS
SPECIFICATIONS SOLICITED ESTIMATES GIVEN

THE WORLD'S MAGAZINE OF OUTING
GUNNING CAMPING
SPORT AND PASTIME
FISHING KENNEL
THE ONLY ILLUSTRATED MAGAZINE OF ITS KIND
CYCLING ATHLETICS
DRIVING RIDING
STORIES OF YACHTING CANOEING
TRAVEL AND ADVENTURE
BOATING LAWN TENNIS
And all Winter and Summer Sports.
TERMS { $3.00 YEARLY. 25 CENTS PER COPY. Send for specimen copy, mentioning this paper
THE OUTING COMPANY, "LTD.,"
239 FIFTH AVENUE,
NEW YORK.

HAVE YOU READ
Experimental Science?
This new book, by Geo. M. Hopkins, is just what you need to give you a good general knowledge of Physical Science. No one having the spirit of the times can afford to be without the kind of scientific information contained in this book. It is not only instructive, but entertaining.
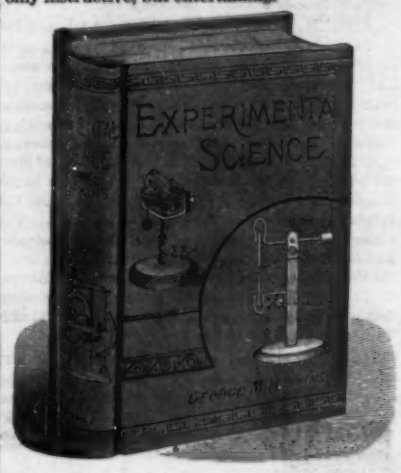

Over 700 pages; 680 fine cuts; substantially and beautifully bound. Price by mail, $4.00.
Send for illustrated circular.
MUNN & CO., Publishers,
Office of the SCIENTIFIC AMERICAN,
361 BROADWAY, NEW YORK.

Mining and Electrical ENGINEER,
Alfred Guillaume,
ELECTRICAL AND MINING
Machinery a Specialty.
Electric Lamps for Miners.
Room 1107, Owings Building,
215 DEARBORN STREET, CHICAGO.
Ask for Guillaume's Revolving Dryer.

ASTRONOMER'S WORK IN A MODern Observatory.—By Dr. David Gill. A very interesting paper by the astronomer at the Cape of Good Hope observatory, giving the routine of the modern astronomer's work, and the results obtained through recent processes of investigation. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 833. Price 10 cents. To be had at this office and from all newsdealers.

WOODEN TANKS
FOR WATER WORKS MILLS, FARMS &c.
LARGE WATER TANKS PLANS & ESTIMATES A SPECIALTY.
COMPLETE STOCK OF CYPRESS LUMBER
SPECIFICATIONS FURNISHED FOR FOUNDATIONS AND PIPING
W. E. CALDWELL & CO.
NO. 217 E. MAIN ST. LOUISVILLE KY.

Van Duzen's Pat. Loose Pulley Oiler HAS Highest Indorsements, Enviable Reputation, Scientific Pedigree.
A two years' test by conservative manufacturers of national reputation has shown it to be the *only perfect Lubricator for Loose Pulleys* in use. Prices very reasonable. Send for our "Catalogue Number 85."
VAN DUZEN & TIFT, Cincinnati, O

World Injectors

operated entirely by a single handle and therefore the simplest to operate. Single turn of the handle is all that is required. Always to be depended upon and consequently the safest and best. If you use, or are likely to use Boiler Feeders, Ejectors, Jet Pumps, etc., send for Catalogue. It contains valuable information and tables for engineers, etc. American Injector Co., 0, 117 Larned St., Detroit, Mich.

Edwards' Works on the Steam Engine

The American Marine Engineer, Theoretical and Practical; with Examples of the Latest and Most Approved Marine Practice. For the Use of Marine Engineers and Students. By Emory Edwards, Marine Engineer. Illustrated by 68 engravings. 12mo, 435 pages. **$2.50**

Edwards' 600 Examination Questions and Answers, for Engineers and Firemen (Stationary and Marine) who desire to obtain a U. S. Government or State License. By Emory Edwards. Full bound in pocket book form, leather. 130 pages..... **$1.50**

The American Steam Engineer, Theoretical and Practical; with Examples of the Latest and Most Approved American Practice in the Design and Construction of Steam Engines and Boilers of Every Description. For the Use of Engineers, Machinists, Boiler Makers, and Students. By Emory Edwards, M.E. Illustrated by 77 engravings. 12mo, 419 pages..... **$2.50**

Modern American Marine Engines, Boilers, and Screw Propellers. Their Design and Construction. Showing the Present Practice of the most Eminent Engineers and Marine Engine Builders in the United States. By Emory Edwards. Illustrated by 30 large and elaborate plates. 4to..... **$5.00**

The Practical Steam Engineers' Guide in the Design, Construction, and Management of American Stationary, Portable, and Steam Fire Engines, Steam Pumps, Boilers, Injectors, Governors, Indicators, Pistons and Rings, Safety Valves and Steam Gauges. For the Use of Engineers, Firemen, and Steam Users. Illustrated by 119 engravings. 450 pages, 12mo..... **$2.50**

A Catechism of the Marine Steam Engine. For the Use of Engineers, Firemen, and Mechanics. A Practical Work for Practical Men. Illustrated by 72 engravings, including examples of the most modern engines. Fifth edition, thoroughly revised, with much new matter. 12mo, 414 pages..... **$2.00**

Modern American Locomotive Engines. Their Design, Construction, and Management. Illustrated by 75 engravings. 12mo, 385 pages..... **$2.00**

☞ *The above or any of our Books sent by mail, free of postage, at the publication prices, to any address in the world.*

☞ *Illustrated circulars, showing full tables of contents of all of the above valuable books, will be sent free to any one in any part of the world who will send his address.*

☞ *Our New and Revised catalogue of Practical and Scientific Books, 96 pages, 8vo, as well as our other catalogues and circulars, the whole covering every branch of Science applied to the Arts, sent free and free of postage to any one in any part of the world who will furnish his address.*

HENRY CAREY BAIRD & CO.,
INDUSTRIAL PUBLISHERS, BOOKSELLERS & IMPORTERS
810 Walnut St., Philadelphia, Pa., U. S. A.

Roper's Engineers' Handy-Book.

The most comprehensive and best illustrated book ever published in this country on the Steam-Engine; Stationary, Locomotive and Marine, and the Steam-Engine Indicator. It contains nearly 300 Main Subjects, 1,316 Paragraphs, 876 Questions and Answers, 52 Suggestions and Instructions, 105 Rules, Formulæ and Examples, 128 Tables, 135 Illustrations, 31 Indicator Diagrams, and 267 Technical Terms; over 3,000 different subjects, with the questions most likely to be asked by men under examination, before being commissioned as an engineer in the U. S. Navy or Revenue Service, or licensed as an engineer in the Mercantile Marine Service.
Price, postpaid..... **$3.50.**

☞ *Descriptive Catalogues mailed free to any address.*

EDWARD MEEKS, Publisher,
No. 1012 Walnut St., - - Philadelphia, Pa.

PATENT DISPLAY STAND

For exhibiting goods of all kinds, and for use as an ornamental center piece for a table. Stand revolves through action of heat. May be readily taken apart and packed in small space. Made of wire in various sizes. Excellent display stand for confectioners' and caterers' use. Exceedingly ornamental and economical to manufacture.

☞ The patent for the above invention, No. 469,876, dated October 6, 1891, for sale entire. Address,
E. A. G. KURTH, P. O. Box 775, New York.

TRIAL BALANCE TRIALS Avoided by using **"Goldman's Advanced System"** for Locating Errors without Rechecking or Copying Entries. No change of Bookkeeping! Sent on Trial. Beware of Imitations! Request Instructive Circular. **Henry Goldman,** Author and Inventor, Major Block, Chicago

HARPER'S PERIODICALS

HARPER'S MAGAZINE, One Year - - $4.00
HARPER'S WEEKLY, One Year - - - - 4.00
HARPER'S BAZAR, One Year - - - - 4.00
HARPER'S YOUNG PEOPLE, One Year - 2.00

☞ *Postage free to all subscribers in the United States, Canada, and Mexico.*

The volumes of the WEEKLY and BAZAR begin with the first numbers for January, the volumes of the YOUNG PEOPLE with the first number for November, and the volumes of the MAGAZINE with the numbers for June and December of each year.

Booksellers and Postmasters usually receive Subscriptions. Subscriptions sent direct to the publishers should be accompanied by Post Office Money Order or Draft. When no time is specified, subscriptions will begin with the current Number.

The MAGAZINE is an overflowing store of good literature and exquisite art—a delightful production deserving all the fame and all the material success which have been won by it. The WEEKLY is a rarely illustrated chronicle of the year's events. There is no end of pleasure and profit in its pages. . . . The BAZAR is a repository of fashion, and a gallery of some of the finest engravings of the time. . . . The YOUNG PEOPLE is at reasure-houses, fascinating to every boy and girl as well as to plenty of persons older. A remarkable and valuable, an instructive and delightful line of publications, indeed.—*N. Y. Sun.*

Address
HARPER & BROTHERS,
NEW YORK.

INVESTMENT. 70 persons with $200 each can secure quarter interest in a patent in 70 different countries. Reference given. Box 196, Orange City, Fla.

THE INTERNATIONAL CYCLOPÆDIA

Revised Edition of 1892. Just Out.

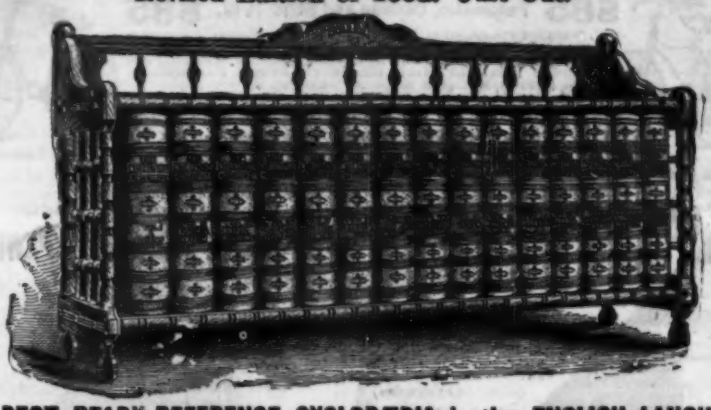

The BEST READY REFERENCE CYCLOPÆDIA in the ENGLISH LANGUAGE

Contains **Latest Census of all Countries, New State Maps** made for this edition; **all Maps Revised to November, 1891; New Colored Plates;** thousands of **Cross-References** connecting collateral topics; valuable **Bibliography;** latest statistics and progress in contemporaneous **History, Politics, Geography, Theology, Biography, Education,** etc. Circulars describing special features mailed free.

SOLD FOR CASH OR ON EASY PAYMENTS. AGENTS WANTED.

DODD, MEAD & COMPANY, SUBSCRIPTION DEPARTMENT, **753 & 755 BROADWAY, NEW YORK.**

STEEL TYPE FOR TYPEWRITERS

Stencils, Steel Stamps, Rubber and Metal Type Wheels, Dies, etc.
Model and Experimental Work Small Machinery, Novelties, etc., manufactured by special contract.
New York Stencil Wks. 100 Nassau St., N.Y.

OIL WELL SUPPLY CO.

91 & 92 WATER STREET,
Pittsburgh, Pa.,
Manufacturers of everything needed for
ARTESIAN WELLS
for either Gas, Oil, Water, or Mineral Tests, Boilers, Engines, Pipe, Cordage, Drilling Tools, etc. Illustrated catalogue, price lists and discount sheets on request.

To Inventors.

E. Konigslow, manufacturer of **Fine Machinery and Models,** offers **Special Facilities to Inventors.** Guarantees to work out ideas in strictest secrecy, and *any improvement that he can suggest goes with the work.* Thousands of men have crude though really valuable ideas, which they lack mechanical training to develop. Novelties and patented articles manufactured by contract. **181 Seneca St., Cleveland, Ohio.**

THE PENNA. DIAMOND DRILL & MFG. CO. BIRDSBORO, PA., Builders of High Class Steam Engines, Diamond Drills, Power and Hand Cranes, and General Machinery.

THE PERFECT CRUDE OIL BURNER.

BEST REGULATION. HIGHEST ECONOMY. FOR ALL PURPOSES. MANUFACTURED IN SIX SIZES BY SHIPMAN ENGINE MANF'G Co. ROCHESTER, N.Y.

If you are interested in

ELECTRICITY

send for our special Price List Z.
BELLS, BATTERIES, PUSHES, WIRE, MOTORS,
And a full line of general
ELECTRICAL SUPPLIES,
STANLEY & PATTERSON,
Electrical House Furnishings,
32 & 34 Frankfort St., N. Y. City.

PURE TEMPERED COPPER

After being on the Market Six Years

The "ACME" Still Leads!

Sizes One, Two, Three, and Four Horse Power. Arranged for either NATURAL GAS or Kerosene Oil fire, as ordered. No extra insurance required on account of the oil fire. Send for catalogue giving full particulars and prices.

Acme Automatic Safety Engine—Stationary. Oil Tank. ROCHESTER MACHINE TOOL WORKS. Brown's Race, ROCHESTER, N. Y.

WASHBURN

Guitars, Mandolins & Zithers
in volume and quality of tone are the BEST IN THE WORLD. Warranted to wear in any climate. Sold by all leading dealers. Beautifully illustrated souvenir catalogue with portraits of famous artists will be Mailed FREE.
LYON & HEALY, CHICAGO.

VOLNEY W. MASON & CO.,
FRICTION PULLEYS CLUTCHES and ELEVATORS
PROVIDENCE, R. I.

"THE KRIEBEL" STEAM ENGINES.



STATIONARY, MARINE & HOISTING ENGINES WITH VERTICAL OR HORIZONTAL STEEL BOILERS. SEND FOR CATALOGUE
RICE & WHITACRE MFG. CO. CHICAGO.

PAINT YOUR ROOFS WITH

DIXON'S SILICA GRAPHITE PAINT.
Water will run from it pure and clean. It covers double the surface of any other paint, and will *last four or five times longer.* Equally useful for any iron work. Send for circulars. JOS. DIXON CRUCIBLE CO., Jersey City, N. J.

$10.00 to $50.00 per night. A light and profitable business. **Magic Lanterns and Views** of popular subjects. Catalogues on application. Part 1 Optical, 2 Mathematical, 3 Meteorological, 4 Magic Lanterns, etc. **L. MANASSE, 88 Madison Street, Chicago, Ill.**



CLARK'S

WOOL WASHERS,
WARP DYEING AND SIZING MACHINES,
PATENT RUBBER COVERED SQUEEZE ROLLS,
POWER WRINGERS FOR HOSIERY AND YARN DYEING,
DRYING AND VENTILATING FANS,
WOOL AND COTTON DRYERS, Etc.
Catalogues free.
GEO. P. CLARK
Box L. Windsor Locks, Conn.

BARNES'
New Friction Disk Drill.
FOR LIGHT WORK.
Has these Great Advantages:
The speed can be instantly changed from 0 to 1000 without stopping or shifting belts. Power applied can be graduated to drive, with equal safety, the smallest or largest drills within its range—a wonderful economy in time and great saving in drill breakage. Send for catalogue.
W. F. & JNO. BARNES CO.,
1999 Ruby St., - Rockford, Ill.

THE BEST LIME KILN known, or no pay. Patented 1891.
C. D. PAGE, Rochester, N. Y.



COMPTOMETER.

Figures any and all kinds of examples. Operated by keys. Saves 60 per cent of time. Insures accuracy, and relieves all mental strain. Why don't you get one?
Send for circular.
FELT & TARRANT MFG. CO.
52-56 Illinois St. Chicago.

FREE

IT WILL COST YOU NOTHING.
Send us your address on a postal and you will receive the finest catalogue of **PIANOS and ORGANS** in the world. It will show you how to **SAVE $100.** Satisfaction guaranteed before you pay. CUT THIS OUT and mail it to us. You will be surprised at the result. But you must do it NOW. Write to
CORNISH & CO. (Established 25 Years.) **WASHINGTON, New Jersey.**

HARRISON CONVEYOR!

For Handling **Grain, Coal, Sand, Clay, Tan Bark, Cinders, Ores, Seeds, &c.**
Send for Circulars. | **BORDEN, SELLECK & CO.,** { Sole Manufrs. } **Chicago, Ill.**

CELLULOID ZAPON Co.

MANUFACTURERS OF CELLULOID LACQUERS AND VARNISHES FOR METAL AND WOOD
41 BARCLAY ST. NEW YORK.
GUM LACQUERS - BRILLIANT AND DEAD BLACKS - SHELLACS &C

PROPOSALS.

U. S. Engineer Office, Army Building, New York, March 28, 1892.—Sealed proposals, in triplicate, will be received at this office until 12 o'clock noon, on April 30, 1892, for supplying all necessary materials and erecting a frame dwelling house upon the U. S. Reservation at Sandy Hook, N. J., at a cost not exceeding $4,500. The attention of bidders is invited to Acts of Congress, approved February 23, 1825, and February 23, 1887, vol. 23, page 332, and vol. 24, page 414, Statutes at Large. For specifications, blank forms, and all information, apply to the undersigned.
G. L. GILLESPIE, *Lieut.-Col. of Engineers.*

To Iron Manufacturers. Office of U. S. Lighthouse Engineer, 9th District, Detroit, Mich., March 28, 1892. Proposals will be received at this office until 12 o'clock M. of Thursday, the 14th day of April, 1892, for furnishing all the material and labor necessary for the construction of metal-work required for the storehouse to be erected at Lighthouse Depot, St. Joseph, Mich. Plans, specifications, forms of proposal, and other information may be obtained on application to this office. The right is reserved to reject any or all bids, and to waive any defects.
WILLIAM LUDLOW, *Lighthouse Engineer.*

To Contractors and Builders. Office of U. S. Lighthouse Engineer, 9th District, Detroit, Mich., March 28, 1892. Proposals will be received at this office until 12 o'clock noon of Thursday, the 14th day of April, 1892, for furnishing the material and labor of all kinds necessary for the complete construction of the Storehouse, Keeper's Dwelling, and Carpenter and Lamplst Shops for Lighthouse Depot, at St. Joseph, Mich. Plans, specifications, forms of proposal, and other information may be obtained on application at this office. The right is reserved to reject any or all bids, and to waive any defects.
WILLIAM LUDLOW, *Lighthouse Engineer.*

MALLEABLE

THOMAS DEVLIN & CO.

SYLPH CYCLES RUN EASY



Hollow Tires.

Perfection of cycle manufacture; no need now to ride springless cycles or depend on tires alone for comfort. *Sylph Spring Frame* destroys vibration. Light, simple, strong. Cats. free. *House-Dupuis Cy. Co.* 16 G St., Peoria, Ill. AGTS. WANTED

CHUCKS.

Catalogue No. 12, just issued with over 40 new illustrations sent free. Address,
The Cushman Chuck Co., Hartford, Conn.

GATES ROCK & ORE BREAKER

Capacity up to 200 tons per hour.

Has produced more ballast, road metal, and broken more ore than all other Breaks combined. Builders of High Grade Mining Machinery. Send for Catalogues.
GATES IRON WORKS,
50 C So. Clinton St., Chicago
136 C, Liberty Street, New York.
207 C, Franklin St., Boston, Mass

DEAFNESS & HEAD NOISES CURED

by Peck's Invisible Tubular Ear Cushions. Whispers heard. Successful when all remedies fail. Sold only by F. Hisoox, 853 B'way, N. Y. Write for book of proofs. **FREE**

MOSS ENGRAVING CO.

535 PEARL ST. NEW YORK

Catalogue of FINE PRESS WORK A SPECIALTY.
OUR PROCESSES MOSS TYPE PHOTO ENGRAVING. ZINC ETCHING

Our new General Circular "S. A.," showing specimens of all our work, is now ready. Send stamp and particulars for estimates.

$5 to $15 per day, at home, selling **LIGHTNING PLATER** and plating jewelry, watches tableware, &c. Plates the finest of jewelry gold or silver, on all kinds of metal with gold, silver or nickel. No experience. No capital. Every house has goods needing plating. Wholesale to agents $5. Write for circulars. **H. K. DELNO & Co., Columbus, O.**

THE REMINGTON STANDARD TYPEWRITER

Isto-day, as it has ever been the leading Typewriter.

Carefully tested improvements are constantly added to this famous machine.

Send for Illustrated Catalogue.

TRY OUR PARAGON BRAND OF TYPEWRITER RIBBONS.

Wyckoff, Seamans & Benedict,
327 Broadway, New York.

212° FAHR. THE STEAM JACKET FEED WATER BOILER & PURIFIER

BOILS THE WATER
WM. BARAGWANATH & SON
46 W. DIVISION ST.
SEND FOR CATALOGUE CHICAGO

Advertisements.

Inside Page, each insertion - - 75 cents a line
Back Page, each insertion - - - - $1.00 a line

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.

VICTORS MAKE THE PACE
Highest Class

Catalogue Free
OVERMAN WHEEL CO.
BOSTON. WASHINGTON. DENVER. SAN FRANCISCO.
A. G. SPALDING & BROS., Special Agents.
CHICAGO. NEW YORK. PHILADELPHIA.

WE manufacture Boilers, Radiators, and other Specialties, and CONTRACT for the ERECTION COMPLETE in any part of the country, the most improved apparatus for
HEATING BY STEAM OR HOT WATER.
We send experienced fitters and guarantee satisfaction. Send plans with full particulars for estimate.
Broomell, Schmidt & Co., Ltd., York, Pa.

DO USEEK POWER?
We can supply it with the

Motor of the 19th Century
¾ to 20 horse power.
Cost about one cent an hour to each indicated horse power.
"In words, not star, my value lies."
What others think of me is stated in catalogue.
CHARTER GAS ENGINE CO.
P. O. Box 266, Sterling, Ill.

THE AMERICAN BELL TELEPHONE CO.
95 MILK ST., BOSTON, MASS.

This Company owns the Letters Patent granted to Alexander Graham Bell, March 7th, 1876, No. 174,465, and January 30th, 1877, No. 186,787.

The transmission of Speech by all known forms of Electric Speaking Telephones infringes the right secured to this Company by the above patents, and renders each individual user of telephones not furnished by it or its licensees responsible for such unlawful use, and all the consequences thereof, and liable to suit therefor.

Machinists' Tools of every description, drop forged from bar steel, correct in design and unequaled in finish.
THE BILLINGS & SPENCER COMPANY,
HARTFORD, CONN.

PELTON WATER MOTOR.

Unequaled for all light running machinery. Warranted to develop a given amount of power with one-half the water required by any other. Evidence of unquestioned superiority afforded on application. Send for Circular. Address,
The Pelton Water Wheel Co.,
[illegible] Main Street, San Francisco, Cal., or 2565 Central Building, Liberty & West Sts., N. Y.



Awarded the Grand Prize at late Paris Exposition.

LOVELL DIAMOND CYCLES

For Gentlemen.
$85 Pneumatic, Cushion and Solid Tires. $85
Diamond Frame, Steel Drop Forgings, Steel Tubing, Adjustable Ball Bearings to all Running Parts, including Pedals, Suspension Saddle, Finest Material money can buy, Finished in Enamel and Nickel. STRICTLY HIGH GRADE IN EVERY PARTICULAR. No BETTER MACHINE MADE AT ANY PRICE.
Bicycle Catalogue Free. Send six cents in stamps for our 100-page illustrated catalogue of Guns, Rifles, Revolvers, Sporting Goods of all kinds, etc.
JOHN P. LOVELL ARMS CO.,
147 Washington Street, Boston, Mass.

For Ladies.

VAN DUZEN'S Steam JET PUMP

PUMPS ANY KIND OF LIQUID.
Does not clog, freeze or get out of order. Always ready. All brass. Every Pump Guaranteed. 10 sizes. Capacity 100 to 10,000 gallons per hour. Prices $7 and upwards. For full information write to
The VAN DUZEN & TIFT CO.
(PUMP DEPARTMENT)
CINCINNATI, O.

FIRE HAZARDS FROM ELECTRICITY.—A lecture by C. J. Woodbury, delivered in the Sibley College Course. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 830. Price 10 cents. To be had at this office and from all newsdealers.

If you are interested in FINE POULTRY, send me your address, and I will send you, free of charge, a large, finely illustrated catalogue.
GEO. T. PITKIN,
3628 Rhodes Ave., Chicago, Ill.

YOU HAVE A LITTLE MONEY LAID BY
What are you going to do with it?
For years you've dreamed of a home of your own; and it wasn't among brick walls and dust and smells and continual noise, was it? No; great maples cast their shade about it; green grass grew to the very door; bees hummed in knee-deep clover; mild-eyed cows cropped sweet June grass on pastured slopes; "with milk and honey blest" was your "land of promise."
NOW LET YOUR DREAM COME TRUE.
See here: 80 acres tillage, meadow, pasture, woodland, each excellent; cranberry "meadow," capable, with moderate outlay, of yielding $1,000 clean profit yearly; fine, large two-story house, twelve rooms, excellent condition, suited to one or two families; excellent water piped to both floors; one minute from church, post office, store, telephone, etc., in a delightful old country-village street; half mile from manufactory, where, if they wish, your children can find steady, easy, profitable employment; 3¼ miles from city, market for everything raised at good prices; two miles to cannery, where contract can be had to raise 62,000 crops a year at good prices; summer boarders if you wish; many other advantages. Place now rents at $175 per year.
Many a man could lay by $500 to $1,000 a year here.
YOU'VE A LITTLE MONEY LAID BY.
This is your opportunity!
To close this estate, we are ordered to sell at once for $2,420. Part may lie on mortgage.
Write us to-day how much you could pay down on it if it suits you, and ask for set of 8 x 10 photos of it.
Write this minute to
Eastern Farm Exchange,
Palmer, Mass.

"Improvement the order of the age."
THE SMITH PREMIER TYPEWRITER

Important Improvements.
All the Essential Features greatly perfected.
The Most Durable in Alignment.
Fastest Running and Most Silent.
All type cleaned in 10 seconds without soiling the hands.
The Smith Premier Typewriter Co., Syracuse, N. Y., U. S. A.
Send for Catalogue.

ELECTRO VAPOR ENGINE.
GAS OR GASOLINE FOR FUEL.
NO BOILER. NO FIRE. NO DANGER.
NO ENGINEER.

Engine operated by spark from small battery.
You turn the Switch. Engine does the rest.
Regan Vapor Stationary Engines, 1 to 12 H. P.
Regan Vapor Pumping Engines, 350 to 10,000 gallons capacity.
—MANUFACTURED BY—
THOMAS KANE & CO.,
CHICAGO, ILL.
Send stamp for catalogue "V."

LEARN WATCHMAKING of W. F. A. Woodcock, Winona, Minn. Write for terms

EDISON
GENERAL ELECTRIC CO.
INCANDESCENT AND ARC LIGHT PLANTS.
Stationary and Railway Motors.—Lamps.—Cables.—Safety Devices.
DISTRICT OFFICES.
Canadian.....Edison Building, 77 Bay St., Toronto, Can.
Central.....173 & 175 Adams St., Chicago, Ill.
Eastern.....Edison Building, Broad St., New York.
New England.....95 Otis St., Boston, Mass.
Mexican and South American Department.....Edison Building, Broad Street, New York.
European Office.....34 Victoria Street, Westminster, London, S.W., England.
Pacific Coast...Edison B'lding, 112 Bush St., S. Fran., Cal.
Pacific Northwest...Fleischner Building, Portland, Ore.
Rocky Mountain.....Masonic Building, Denver, Colo.

ARTESIAN
Wells, Oil and Gas Wells, drilled by contract to any depth, from 50 to 3000 feet. We also manufacture and furnish everything required to drill and complete same. Portable Horse Power and Mounted Steam Drilling Machines for 100 to 1,000 feet. Write us stating exactly what is required and send for illustrated catalogue. Address
PIERCE ARTESIAN & OIL WELL SUPPLY CO.,
30 BEAVER STREET, NEW YORK.

PATENT JACKET KETTLES

Plain or Porcelain Lined.
Tested to 100 lb. pressure. Send for Lists.
BARROWS-SAVERY CO.,
8. Front & Reed Streets, Philadelphia, Pa.

WHY PAY FANCY PRICES for Valves

with rubber or asbestos disks, because you are disgusted with the cheap trade valve? No composition is as good for steam as gun metal; therefore why pay *more* for an *inferior* article? Investigate *Lunkenheimer's Patented Improved Valves* (gun metal). When worn, can be made good as new by regrinding or the disk replaced. *Warranted to outlast two of any other make.* As a proof of their superiority, are extensively used on locomotives, steamships, and in the U. S. Navy, on cruisers. Every valve has a direction tag attached, and "Lunkenheimer" cast in the valve shell. For sale by dealers, or write
The Lunkenheimer Brass Mfg. Co., Cincinnati, Ohio, U. S. A. Mention this paper.

H. CHANNON COMPANY,
Contractors' Supplies
WIRE ROPE, MANILLA ROPE,
Iron and Wooden Tackle Blocks, Etc., Hoisting Engines and Hand Powers.
24-26 Market St., CHICAGO, ILL.

KODAKS
are always loaded ready for immediate use. They can be used for roll films or glass plates. The new
Daylight Kodak
can be loaded in daylight. Registers exposures and locks automatically when a new film is turned into place.
$8.50 to $25.00
THE EASTMAN COMPANY,
Send for Circulars. ROCHESTER, N. Y.

Columbia BICYCLES. GUARANTEED.

Catalogue free on application to the nearest Columbia Agent, or sent by mail for two 2-cent stamps.
POPE MFG. CO., 221 Columbus Ave., Boston.

VULCABESTON
Composed of Asbestos, combined with Water and Acid Proof Materials, Compressed and Vulcanized FOR ELECTRICAL PURPOSES.
Switch Boards, Armature Sleeves, Battery Cells, Insulating Washers, Insulating Parts for Arc Lights, Incandescent Lights, Motors, Chandeliers, Dynamos, etc. Special styles and shapes to order. Prices on application.
H. W. JOHNS MANUFACTURING COMPANY,
SOLE MANUFACTURERS OF
H. W. Johns' Asbestos Millboard, Sheathings, Building Felts, Fire-Proof Paints, Liquid Paints, Asbestos Roofing, Etc.
87 MAIDEN LANE, NEW YORK. CHICAGO, PHILADELPHIA, LONDON.

GRAVES ELEVATORS.

NEW MAIL
$100
Cushion Tires, Tangent Spokes With Pneumatic Tires, $120
Also $135 and $150 patterns.
" Lady's pattern.....$100
" Boy's New Mail.....80
Handsomest and best Diamond safety. *Send for Catalogue and Second-Hand List.*

Also Sole New England Agents for

LITTLE GIANT
PRICE, $35.00.
Only Boy's Safety with a Spring Fork, preventing injury to young riders from jar and vibration.
WM. READ & SONS, 107 Washington St. BOSTON, MASS.

BALL AUTOMATIC CUT OFF ENGINE
MADE ONLY BY
THE BALL ENGINE CO
ERIE PA

THE
SCIENTIFIC AMERICAN
ESTABLISHED 1845.
The Most Popular Scientific Paper in the World

Only $3.00 a Year, Including Postage.
Weekly—52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity, Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc. Complete list of patents each week.

Terms of Subscription.—One copy of the SCIENTIFIC AMERICAN will be sent for *one year*—52 numbers—postage prepaid, to any subscriber in the United States, Canada, or Mexico, on receipt of three dollars by the publishers; six months, $1.50; three months, $1.00.

Clubs.—Special rates for several names, and to Post Masters. Write for particulars.

The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to
MUNN & CO., 361 Broadway, New York.

THE
Scientific American Supplement

This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages full of engravings, many of which are taken from foreign papers and accompanied with translated descriptions. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology, Geology, Mineralogy, Natural History, Geography, Archæology, Astronomy Chemistry, Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology, Manufacturing Industries, Sanitary Engineering, Agriculture, Horticulture, Domestic Economy, Biography, Medicine, etc. A vast amount of fresh and valuable information obtainable in no other publication.

The most important Engineering Works, Mechanisms, and Manufactures at home and abroad are illustrated and described in the SUPPLEMENT.

Price for the SUPPLEMENT for the United States and Canada, $5.00 a year; or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year for $7.00. Single copies, 10 cents. Address and remit by postal order, express money order, or check,
MUNN & CO., 361 Broadway, New York,
Publishers SCIENTIFIC AMERICAN.

Building Edition.

THE SCIENTIFIC AMERICAN ARCHITECTS' AND BUILDERS' EDITION is issued monthly. $2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming a large and splendid Magazine of Architecture, richly adorned with *elegant plates in colors*, and with other fine engravings; illustrating the most interesting examples of modern architectural construction and allied subjects.

A special feature is the presentation in each number of a variety of the latest and best plans for private residences, city and country, including those of very moderate cost as well as the more expensive. Drawings in perspective and in color are given, together with full Plans, Specifications, Sheets of Details, Estimates, etc.

The elegance and cheapness of this magnificent work have won for it the Largest Circulation of any Architectural publication in the world. Sold by all newsdealers. $2.50 a year. Remit to
MUNN & CO., Publishers,
361 Broadway, New York.



PRINTING INKS
The SCIENTIFIC AMERICAN is printed with CHAS. ENEU JOHNSON & CO.'S INK, Tenth and Lombard Sts., Philadelphia, and 47 Rose St., opp. Duane, New York